ENGINEERING NEWS-RECORD

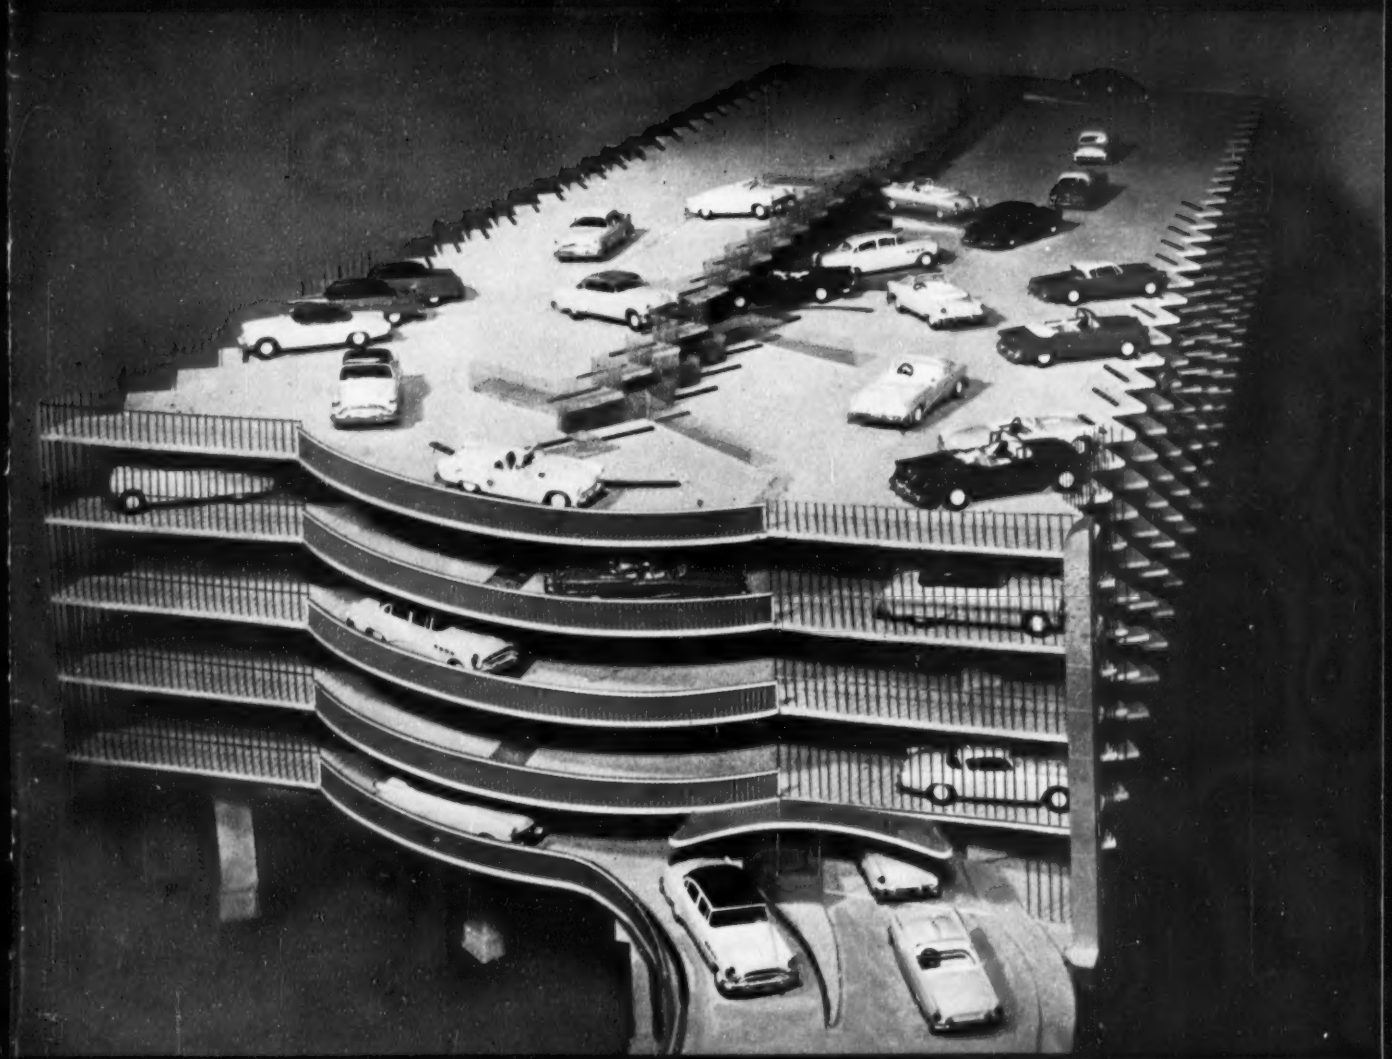

★ Does it pay to build underground? (p. 33)

★ Paper forms beat tough foundation (p. 40)

A McGRAW-HILL PUBLICATION

E B POWER
UNIVERSITY MICROFILMS IN
313 N 1 ST
ANN ARBOR MICH

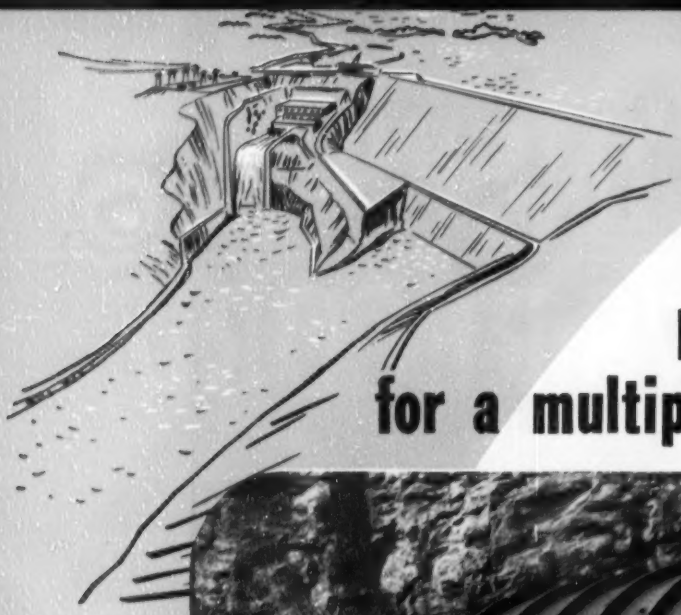

PENSTOCKS
for a multiple purpose development

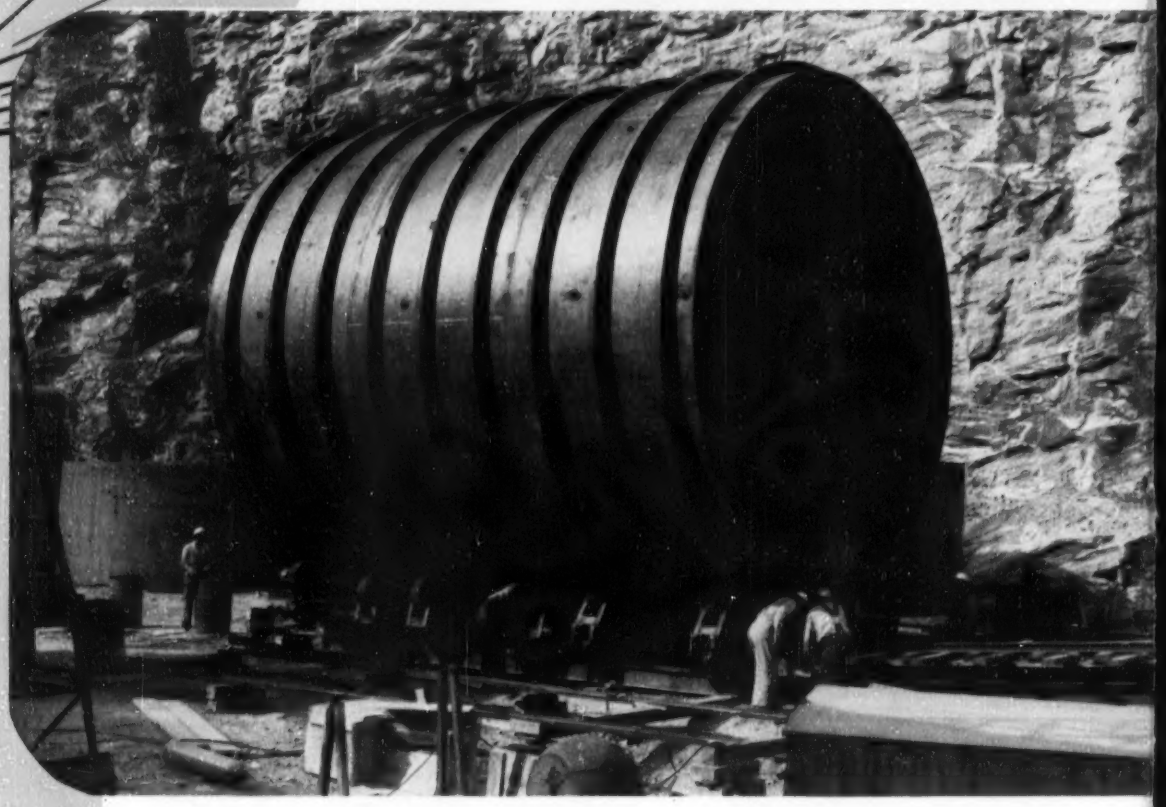

Buford Dam, under construction on the Chattahoochee River thirty-five miles northeast of Atlanta, Ga., will store 1,250,000 acre-ft. of water for flood control, navigation and for producing 86,000 kw of hydro power. To meet the penstock requirements of this multiple purpose development CB&I supplied three penstock linings, two 22-ft. diam. by 216-ft. long and one 10- ft. diam. by 122-ft. long. CB&I has been called upon to solve many complicated and unusual steel plate problems in the last 64 years. Write our nearest office and make use of this experience when you plan penstocks or other welded steel plate structures.

CHICAGO BRIDGE & IRON COMPANY

Atlanta, 3.....2125 Healey Building
Birmingham, 1.....1520 North 50th Street
Boston, 10.....1012-201 Devonshire Street
Chicago, 4.....2101 McCormick Building
Cleveland, 15.....2201 Midland Building
Detroit, 26.....1506 Lafayette Building
Houston, 2.....2109 C & I Life Building
Los Angeles, 17 .1511 General Petroleum Building
New York, 6.....3311—165 Broadway Building
Philadelphia, 3 .1623—1700 Walnut Street Building
Pittsburgh, 19.....3212 Alcoa Building
Salt Lake City, 4....512 West 17th South Street
San Francisco, 4.....1530—200 Bush Street
Seattle, 1.....1312 Henry Building
Tulsa, 3.....1617 Hunt Building

Plants in BIRMINGHAM, CHICAGO, SALT LAKE CITY and GREENVILLE, PA.

In Canada: HORTON STEEL WORKS LIMITED, FORT ERIE, ONT.

Pace-Setting HD-5G Tractor Shovel

NOW BETTER 3 WAYS

HD-5G TRACTOR SHOVEL

Rated capacity	1¼ cu yd
Belt horsepower	50
Weight, complete	16,200 lb
Dumping height	9 ft, 2 in.

From the time of its introduction seven years ago, the Allis-Chalmers HD-5G Tractor Shovel has been tops in popularity. Many thousands are daily proving their ability and versatility on all kinds of material handling and excavating jobs.

Now, design refinements make the HD-5G a three-way better value than ever before:

1. Has Bigger Rated Capacity

New bucket handles a big 1¼-yd load — streamlined design now helps roll in large loads with less tractor effort. The back of the bucket has been brought forward and the sides extended to cut spillage, put more payload where it's wanted.

2. Helps the Operator Do More

Cleaner dumping with the new bucket saves the operator time and effort shaking out loads.

For added versatility, there is a two-position bucket available with both standard automatic return to digging position and operator-controlled tip-back. If the operator chooses to use the controlled tip-back, he can load the bucket, then tip it back approximately 25° before raising, assuring maximum output under special conditions such as downhill loading or loading loose materials.

The HD-5G helps the operator do more in other ways, too — giving him full vision, fast and easy control, cleaner platform and more comfortable seat from which to work, and more working time with truck wheels, support rollers and idlers that need greasing only once every 1,000 hours.

3. Works at Lower Cost

The HD-5G now works at even lower cost than ever before — not just because it *does more*, but because it has features that mean *less maintenance, longer life.* For instance, new type tubular bracing on the bucket booms provides added strength and support, keeps the bucket in line. The floor at the rear of the new bucket has been raised seven degrees to reduce wear on the bottom sheet. Heavy-duty truck wheels and idlers are available for particularly tough working conditions. One-piece, full-length main frame permits unit construction so that major assemblies can be removed without disturbing adjacent units, putting tractor back on the job in hours rather than days.



Ten Quick-Change Attachments Add to HD-5G Versatility

Bulldozer	Crane Hook	Tine Fork
Angledozer	Light Material Bucket	Rock Fork
Narrow Bucket	Trench Hoe	— also rear-mounted Ripper
Rock Bucket	Lift Fork	

See your Allis-Chalmers dealer for more about these and other production-boosting features of the popular HD-5G Tractor Shovel.

ALLIS-CHALMERS
TRACTOR DIVISION • MILWAUKEE 1, U. S. A.

Verantius' Pons Ferreus

A SUSPENSION BRIDGE DESIGN
early seventeenth century



Engineering problems have been growing more and more complex in the past 300 years, and with them has grown the need for greater drafting precision. Since 1662, when the first Staedtler pencils were produced in Nurnberg, Germany, Staedtler has made constant improvements in pencil design and manufacture. Today, the Mars-Lumograph is America's finest imported drawing pencil; in the clutch pencil field the combination of the new 1001 Mars Technico push-button lead holder and 1904 Mars-Lumograph imported drawing leads insures your having the very best.

The 2886 Mars-Lumograph drawing pencil gives you precise thickness and the blackness of line needed for crisper, cleaner prints. Perfectly graded in 19 degrees; EXEXB to 9H. $1.50 per dozen—less in quantity.

The 1001 Technico Mars-Lumograph push-button lead holder costs no more than ordinary holders, has a noiseless, smooth-working, low-friction clutch mechanism, lightweight wood construction with perfect balance and, built into the push-button cap, a unique lead sharpener. $1.50 each—less in quantity.

1904 Mars-Lumograph Imported Drawing Leads are so opaque that inking-in is not necessary. Leads are ribbed for firm clutch grip and each has a removable cap which prevents sliding from holder. Available in 18 degrees; EXB to 9H. $1.20 per dozen—less in quantity.

J.S. STAEDTLER, INC.
27 DICAROLIS COURT
HACKENSACK, NEW JERSEY

ENGINEERING NEWS-RECORD

Member

Editorial Offices, 330 W. 42nd St., New York 36, N. Y.

Telephones: New York - LOngacre 4-3000; Chicago - MOhawk 4-5800; San Francisco - DOuglas 2-4600
Washington - REpublic 7-6630

Number of copies of this issue printed 65,466

CONTENTS ON PAGE 17

Waldo G. Bowman
Editor

E. E. Halmos Jr. ..... *Managing Editor*
J. J. Christie ..... *Asst. Managing Editor*
V. T. Boughton ..... *Transportation, Power*
F. S. Merritt ..... *Architectural, Structural*
R. H. Dodds ..... *Contracting, Heavy Construction*
S. C. Jensen ..... *Materials and Equipment*
A. J. Fox Jr. ..... *Hydraulic, Water Supply, Sanitation*
Ross Hazeltine ..... *National Affairs*
J. P. Chamberlain ..... *Business and Finance*
R. W. O'Neill ..... *Highways, International*
J. R. Owen ..... *Municipal*
J. R. Carr ..... *Midwest (Chicago)*
L. L. Wise ..... *West (San Francisco)*
N. A. Bowers ..... *Consultant (San Francisco)*
Elsie Eaves ..... *Business News Department*
J. H. Webber ..... *Economics*
J. A. Mahoney, M. O. Wetzel ..... *Construction Reports*
M. W. Roessler, E. R. Huber ..... *Statistics, Costs, Prices*
M. V. Leggiero ..... *Makeup*
B. J. Lamb, B. J. Bagley ..... *Rewrite, Copy*
J. C. Greenough ..... *Printing*

Washington News Bureau, Room 1189 National Press Building; G. B. Bryant, Jr., *Manager*, Glen Bayless, A. E. Adams, Jay Flocken, Boyd France, William Gilmour, Sam Justice, D. O. Loomis, Gladys Montgomery, A. L. Moore, William Olcott, M. A. Reichek, Caroline Robertson, J. T. Skelly, V. B. Smith.

Domestic News Bureaus: Atlanta, 1321 Rhodes-Haverty Bldg., W. A. Kearns; **Cleveland,** 1510 Hanna Bldg., R. A. Cochran; **Detroit,** 856 Penobscot Bldg., J. C. Jones Jr.; **Houston,** 1303 Prudential Bldg., J. A. Lee; **San Francisco,** 68 Post Street, M. C. Ralston; **Los Angeles,** 1111 Wilshire Blvd., John Shinn; **Seattle,** 6040 Fifth Ave., N.E., Ray Bloomberg.

Correspondents: Albany, Albuquerque, Augusta, Me., Austin, Boston, Boulder, Baltimore, Birmingham, Bismarck, Charleston (W. Va.), Charleston (S. C.), Columbus, Cincinnati, Cleveland, Chicago, Cheyenne, Dallas, Denver, Detroit, Durham, Harrisburg, Helena, Houston, Hartford, Indianapolis, Jackson, Miss., Jacksonville, Jefferson City, Kansas City (Mo.), Lansing, Lincoln, Little Rock, Miami, Memphis, Minneapolis, Montgomery, Milwaukee, New Orleans, Norfolk, Omaha, Oklahoma City, Philadelphia, Pittsburgh, Portland (Ore.), Providence, Phoenix, Pierre, St. Louis, Schenectady, Syracuse, St. Paul, Seattle, Salt Lake City, Spokane, Topeka, Trenton, Wilmington. **Canada:** Montreal, Toronto, Ottawa, Victoria, Regina.

Foreign News Bureaus: J. K. Van Denburg, Jr., **New York;** G. W. Schroeder, **Bonn;** Edward W. S. Hull, **London;** Herbert Leopold, **Manila;** John Wilhelm, **Mexico City;** John O. Coppock, **Paris;** A. W. Jessup, **Tokyo;** L. J. Holmes, **Sao Paolo. Correspondents:** Amsterdam, Athens, Bangkok, Bogota, Bombay, Brussels, Buenos Aires, Caracas, Copenhagen, Geneva, Havana, Helsinki, Johannesburg, Lima, Madrid, Melbourne, Oslo, Rome, Stockholm, Sydney, Tehran, and 21 other principal cities and countries.

Robert F. Boger
Publisher

December 9, 1954 ENGINEERING NEWS-RECORD Vol. 153, No. 24

Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y. Donald C. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Engineering News-Record—Subscription Service, 99-129 North Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow one month for change of address. Subscriptions are solicited only from persons with an identifiable commercial or professional interest in construction and building. Position and company connection must be indicated on subscription orders.

Single copies 25¢. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada $8.00 a year; $12.00 for two years; $16.00 for three years. Other Western Hemisphere and the Philippines, $15.00 a year; $25.00 for two years; $30.00 for three years. All other countries $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter October 29, 1936, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A.

Copyright 1954 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

*Wolmanized
LUMBER
stresses application versatility

... among these four outstanding benefits



1 Application versatility. Wolmanized clean pressure-treated lumber is an improvement on nature. Having all the versatility and user acceptance that is traditional of wood, Wolmanized lumber goes even farther. It is many times longer lasting than untreated lumber, while being deadly to rot and termites. Wolmanized lumber is the treated lumber that is "pedigreed" with actual documented Service Records. These records not only authenticate more than a quarter century of service but list literally hundreds of applications. Wherever you may have use for treated lumber, Wolmanized clean pressure-treated lumber will meet, and will probably exceed, your requirements. Application versatility of Wolmanized lumber is heightened by important added benefits, too. Besides being clean, it is also odorless, completely paintable, harmless to skin and clothing, and noncorrosive to metal fittings.





2 Available anywhere. There are many kinds of treated lumber, but 48% of *all* clean pressure-treated lumber is "Wolmanized" brand. This means that nearly as much of it is specified and used as is the combined total of all other kinds. Distribution as well as quality earns such acceptance. 24 qualified wood preserving plants in the United States and Canada provide coast-to-coast distribution, assure certain delivery.

3 Uniform treatment. Wherever you buy Wolmanized clean pressure-treated lumber you can be sure that uniform treatment is providing a product of undeviating high quality. The Wolman brand salts are produced under a single exact formula. High pressure treatment processes by which Wolman preservative, in solution, is driven deep into wood fibers must also meet rigid Koppers requirements.

Only properly equipped, responsible wood preserving organizations can qualify for licenses to produce under the "Wolmanized" brand.

4 Proved dependability. The Service Records that demonstrate Wolmanized lumber's application versatility also prove its dependability. Actual case histories of how Wolmanized lumber has served others, and how it can fill your needs have been compiled into an informative brochure. For full information write: Koppers Company, Inc., Wolman Preservative Department, Pittsburgh 19, Pennsylvania.

*"Wolman" and "Wolmanized" are registered trademarks of Koppers Company, Inc.



Pressure-Treated

Wolmanized
LUMBER

OHIO TURNPIKE. Max Julian, Angola, Indiana, holder of a 1,000,000-cubic yard earthmoving sub-contract, rates INTERNATIONALS this way: *"My TD-24 powered scrapers can't be beat for production and my 2T-75 high-speed earthmovers are faster, sturdier and haul more weighed yards per trip than any others with the same capacity."*

MAINE TURNPIKE EXTENSION. DeMatteo Construction Co., Quincy, Mass., team these three INTERNATIONAL Model 2T-75s with 8 TD-24s with dozers and scrapers to move 1,250,000 cu. yds. of borrow on 9.145-mile Turnpike contract.

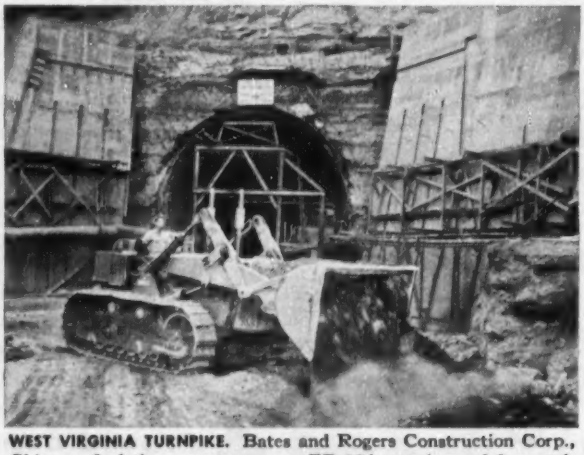

WEST VIRGINIA TURNPIKE. Bates and Rogers Construction Corp., Chicago, find the INTERNATIONAL TD-18A crawler and 3 cu. yd. INTERNATIONAL DROTT Skid-Shovel a great all-around performer in constructing ½-mile tunnel between Standard and Fairfield, W. Va.

WEST VIRGINIA TURNPIKE, Morrison-Knudsen Co., Inc. and R. E. Mills Company, Cabin Creek, West Virginia, used INTERNATIONAL TD-24 to push-load scrapers on a 9-mile contract on the recently opened West Virginia Turnpike.

NEW HAMPSHIRE TURNPIKE. Leveling fill on the New Hampshire Turnpike is a fast moving job with an INTERNATIONAL TD-24 and bulldozer supplying the power. R. G. Watkins & Sons, Inc., Amesbury, Mass., equipment owner.

IH works on the Superhighways

From pioneering to paving, INTERNATIONAL equipment speeds the nationwide superhighway projects with lower costs and greater contractor profit.

Contractors who build super roads buy INTERNATIONAL equipment for the same reason the general public snaps up Turnpike bonds—IH is a shrewd, safe investment netting top returns.

There's one common characteristic about all INTERNATIONAL earthmoving equipment—it is designed to move more paydirt for less money from start to finish on every job. Best thing is that these operating advantages are available to all contractors—fleet owners and owners of a single tractor, alike.

Call your INTERNATIONAL Industrial Power Distributor today for full details or an on-your-job demonstration of the IH equipment needed in your operations. You'll be money ahead this year and in the years to come. Besides, you can always depend on prompt, efficient service and genuine replacement parts for your INTERNATIONALS. Wherever your job may be, an INTERNATIONAL Industrial Power Distributor is nearby to serve you on the job, in his completely equipped shop.

INTERNATIONAL HARVESTER COMPANY, CHICAGO 1, ILLINOIS

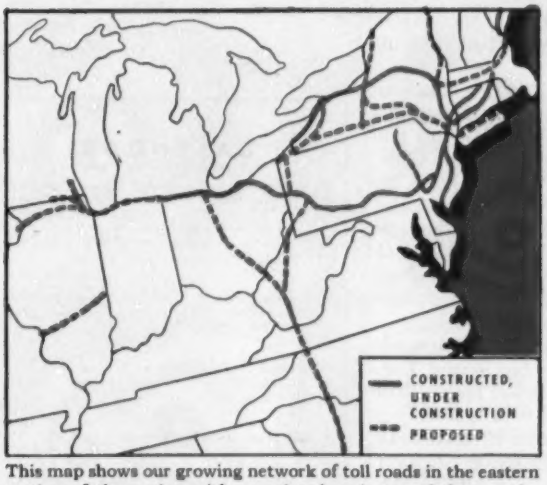

This map shows our growing network of toll roads in the eastern section of the nation with completed projects and those under construction shown in solid lines, and proposed turnpikes appearing in dotted lines.

INTERNATIONAL HARVESTER

INTERNATIONAL
INDUSTRIAL POWER

MAKES EVERY LOAD A PAYLOAD

MAINE TURNPIKE EXTENSION. Here are five of the eight INTERNATIONAL TD-24s used by Nello L. Teer Company, Durham, North Carolina, shown loading out the fill on one of the firm's prime contracts totaling 13.48 miles on the Maine Turnpike Extension.

NEW YORK THRUWAY. D. W. Winkelman Company, Inc., Syracuse, N. Y., uses INTERNATIONAL TD-24 to pull elevating loader that keeps eight haul trucks rolling with 400 cubic yards of fill hourly on New York Thruway approach roads.

PENNSYLVANIA TURNPIKE EXTENSION. J. D. Morrissey, Inc., Philadelphia, uses seven INTERNATIONAL TD-24s, two INTERNATIONAL TD-18As on $5,385,313 prime contract for 7½ miles of the Delaware River extension of the Pennsylvania Turnpike.

HOW TO HANDLE
WET JOBS

INTERCEPTING SEWER

Staten Island, N. Y.

Contractor: Nicholas DiMenna & Sons



PUMP 20 MILLION GALS PER DAY TO KEEP SUBGRADE DRY

THE CENTER-LINE of this excavation was less than 300 ft from the Atlantic Ocean, which fairly flooded through the highly pervious sand.

• The problem was to lower 28 ft of groundwater in a 30-ft cut for a new concrete intercepting sewer—to do this on a site where contractors could recall previous experience of tough water-fighting at an excavation depth of only 16 ft, even with aid of wellpoints. Thus, the outlook was not exactly rose-colored.

• Yet the plan of the Griffin engineers and the efficiency of their pumps and wellpoints gave a sure, speedy solution. The truly enormous volume of 20 *million* gals per day was pumped under perfect control, keeping subgrade bone-dry and permitting economical open cut, except where sheeting was required (see photo) to protect existing sewers and structures.

GRIFFIN
WELLPOINT CORP.
881 East 141st Street, New York 54, N. Y.
Hammond, Ind. Houston, Tex. Jacksonville, Fla.

In Canada: Construction Equipment Co., Ltd.
Toronto Montreal Halifax

READER COMMENT

That Long, Long Trailer

SIR: We noticed in ENR November 11, p. 93 a misprint in the length given for our self-unloading cement transport. It should read "Lengths up to 37 ft. . ." and not 378 ft as stated.

We thought we had better call this to your attention immediately because we are already receiving inquiries for information on a 378-ft transport.

M. J. KROUPA
Sales Dept.
Highway Equipment Co., Inc.
Cedar Rapids, Iowa

[EDITOR'S NOTE—Might be okay on the straightaway but those curves!]

Longest Sea Loading Line?

SIR: Your article "Giant Loading Line Goes Down to Sea" appearing in the Engineering News-Record of November 11, 1954, was a very interesting discussion of the launching procedure for a subline. The claim to the longest sea loading line, however, may be inaccurate.

In December of 1953, a line was launched by the American Independent Oil Company from their oil terminal in Kuwait, into the Persian Gulf. This line was a 16" line, 11,981 ft. long. Contractor on this work was the Construction and Trading Company of Beirut. Carroll E. Bradberry and Associates, Consulting Engineers of Los Altos, California were the engineers.

Although the American Independent line may not be the longest line, it appears to be somewhat longer than the one described in your article.

CARROLL E. BRADBURY
Consulting Engineer
Los Altos, Calif.

The Future for Airports

SIR: It is obvious from the article, "What's New in Airport Terminal Building," (ENR Nov. 18, p. 34) that airport buildings serving a large volume at great metropolises are not being planned satisfactorily.

In carrying capacity, a large plane is similar to one railroad car, the difference being the greater space requirements of planes because of the wings and space required for maneuvering. . . . With five levels, 15,000 railway cars, each equivalent to one plane, could be loaded and unloaded within walking distance of a central terminal. Now if one were to try to load and unload 15,000 airplanes of the present size at a terminal, the wings and maneuvering space, and the necessity of having the planes all on one level, would cover an area so great that it would be far beyond walking distance.

In the future, even if much larger planes are used, it might be daily routine to have 200 planes at a time loading and unloading at an airport in many large cities at peak hours. It is obvious, that with planes of 500-passenger capacity, with huge wings, 200 planes could not be docked around a central terminal, unless some method of ground transportation is used from plane to terminal. . . .

In such a tremendous metropolis like New York, the easiest way to solve the problem is to have each large airline with its own building and facilities separate from the others, with an interairport transportation system between various airline terminal buildings. . . .

FRANKLIN E. GROSS
Transportation Consultant
New York, N. Y.

CALENDAR

Engineering Section, American Association for the Advancement of Science, Dec. 27-30, also the **Fourth Conference on Scientific Manpower,** Dec. 28-29, both at the University of California, Berkeley, Calif.

American Road Builders' Association, convention, Roosevelt Hotel, New Orleans, Jan. 10-13.

National Association of Home Builders, convention, Conrad Hilton Hotel, Chicago, Jan. 16-20.

Engineers Joint Council, general assembly, Hotel Statler, New York City, Jan. 21.

Associated Equipment Distributors, annual meeting, Conrad Hilton Hotel, Chicago, Jan. 23-27.

Mason Contractors Association of America, annual convention, Jefferson Hotel, St. Louis, Jan. 30-Feb. 2.

National Society of Professional Engineers, spring meeting, Hotel Charlotte, Charlotte, N. C., Feb. 18-19.

Annual Highway Engineering Conference of the University of Colorado, Boulder, Feb. 24-25.

Concrete Contractor's Association of Greater Chicago, Mid-West Concrete Exposition, Navy Pier, Chicago, Feb. 24-26.

National Association of Corrosion Engineers, annual conference, Palmer House, Chicago, March 7-11.

You Can Cut Sewerage and Drainage Costs 3 Ways....

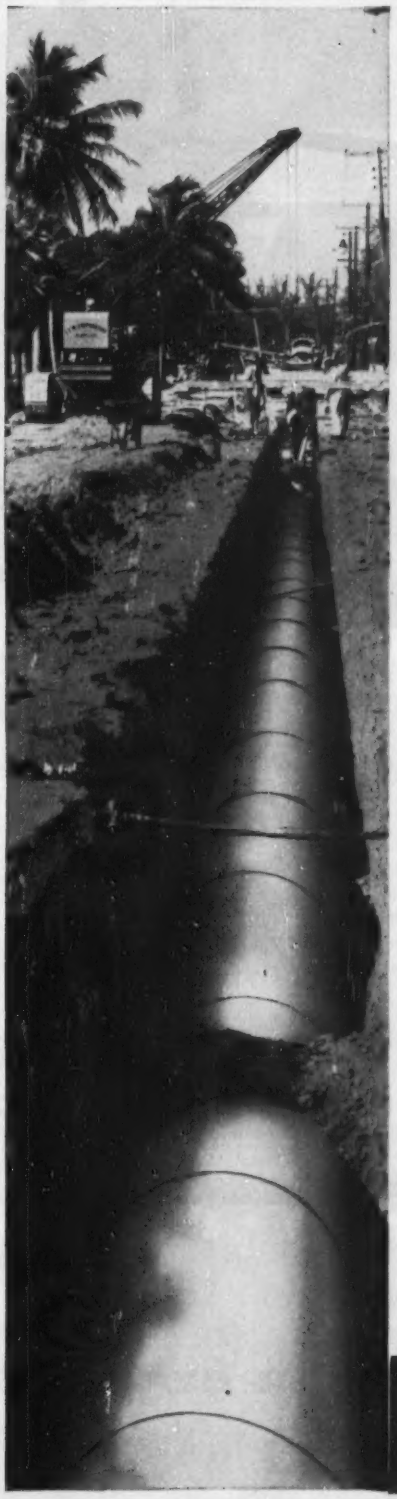

Specify TYLOX Flexible Rubber PIPE JOINTS

ON INSTALLATION . . .

Construction men make *thriftier* bids on TYLOX-Jointed pipe projects, because they can count on the pipe going down *faster.* There's no "fussy" mortaring, calking or collaring to run up costly man hours. Three simple steps (shown in the sketches below) are all it takes to make TYLOX pipe joints. And Tylox eliminates costly delays normally taken for granted on a pipe job . . . For instance, Tylox may be properly installed in wet trenches, and all finished line may be backfilled immediately.

ON MAINTENANCE . . .

Tylox Joints relieve sewerage and drainage budgets of excessive maintenance burden . . . non-deteriorating and non-crumbling Tylox doesn't have to be "dug up" for repairs. Tylox Joints are made of a specially compounded rubber which resists sewage and industrial waste acids, and is virtually ageless. Once installed, they outlast the pipe itself.

ON SEWAGE TREATMENT

Tylox Joints completely defeat infiltration at pipe joints, saving substantially on the cost of operating sewage treatment plants. Tylox seals by compression, not adhesion. When the pipe is shoved home, *flexible* Tylox packs the joint's annular space tight by mechanical action, and the natural resilience of the rubber *keeps* it tight, preventing infiltration or root penetration for "the life of the line."

Take advantage of these Tylox features to cut costs 3 ways when planning your sewerage and drainage installations. Specify TYLOX RUBBER JOINTS.

Making Joints with TYLOX RUBBER GASKETS is as simple as A B C

Cement tongue and snap on TYLOX gasket.

Lubricate sliding surfaces with TYLOX cement.

Shove the pipe home to line and grade.

Write today for complete specification data and literature on TYLOX Pipe Jointing Gaskets. 1824

HAMILTON KENT MANUFACTURING COMPANY

225 Gougler Ave. KENT, OHIO Tel. 3449

HEAVY-DUTY BEARINGS... for a heavy-duty crusher

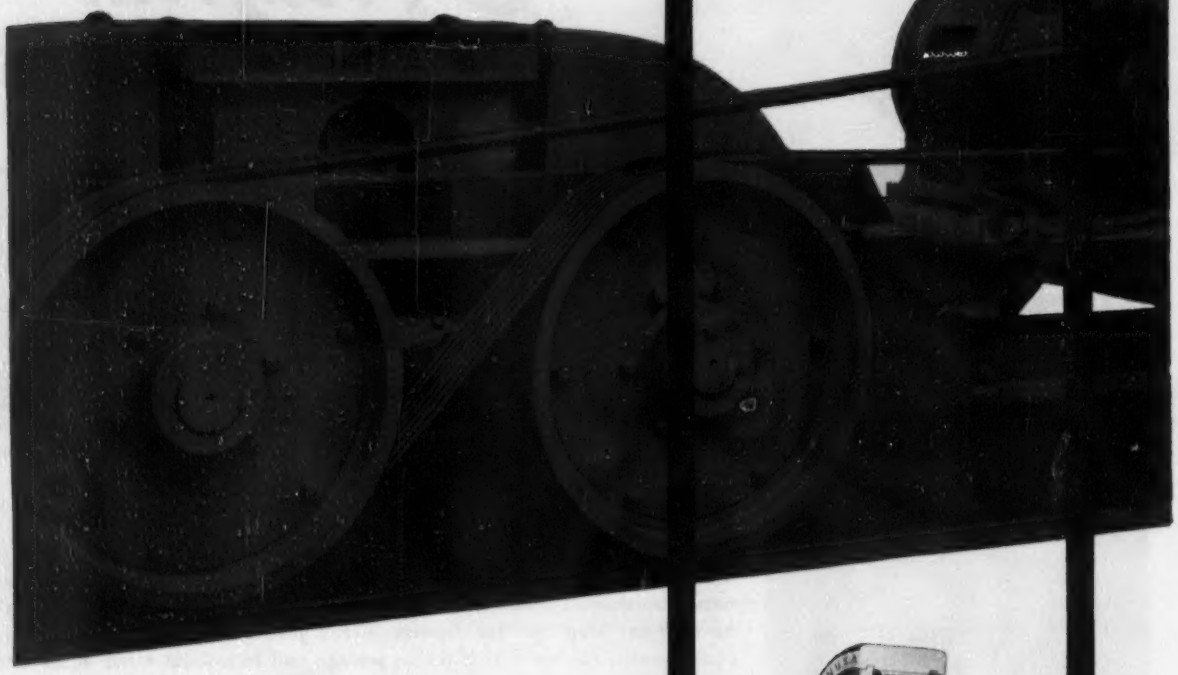

J. C. Steele and Sons, who build this rugged Model 14A Shale Crusher, want the best bearings money can buy at the critical points—the roll shafts which bear the brunt of the entire crushing load.

So the fixed roll shaft and the sprung roll shaft are each equipped with a pair of Type A-TS HYATT Hy-Load bearings. Their solid, precision-built cylindrical rollers provide maximum capacity for the punishing radial loads the roll shafts must continually absorb.

Like so many other quality machinery builders, Steele makes *sure* of trouble-free service by specifying HYATTS!



The Hyatt A-TS Bearing is one of five basic Hy-Load types featuring a separable inner race.

HYATT ROLLER BEARINGS

STRAIGHT BARREL TAPER

HYATT BEARINGS DIVISION • GENERAL MOTORS CORPORATION • HARRISON, NEW JERSEY

Judge Layne

by the industries it serves

Our sincere apologies to the many other leading industries space prevents including.

For information on any question that relates to ground water development, write . . .

Layne & Bowler, Inc.
Memphis 8, Tennessee, U.S.A.

Layne Associate Companies Throughout the World

Water Wells • Vertical Turbine Pumps • Water Treatment

Here's the simplest diesel fuel system ever developed!

Simplest pump and fuel control arrangement

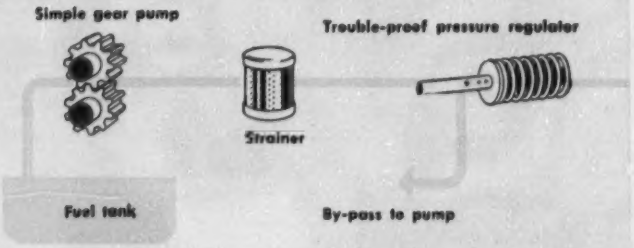

Cummins new PT *fuel system...*

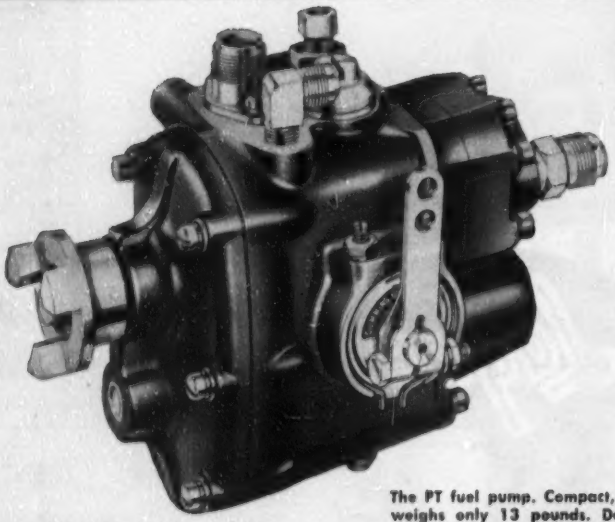

The PT fuel pump. Compact, easy to handle, weighs only 13 pounds. Does not have to be timed to engine, quick and easy to install.

The PT injector utilizes the exclusive Cummins principle of fuel injection which has set the highest standards of performance and economy for more than 20 years.

THE revolutionary new PT fuel system, now standard on all Cummins Diesels, has fewer and far simpler parts than carburetor and ignition systems or ordinary diesel fuel systems. It is easy to understand, simple to work with, can be serviced by any mechanic. No longer any need for fuel system specialists! The PT fuel system has undergone two years of field testing and millions of operating miles under every conceivable condition. Its dependability record is phenomenal. Operators report even less fuel consumption than with earlier Cummins fuel systems and far less cost of maintenance. The PT fuel system can be installed on any Cummins Diesel built since 1932.

Cummins

leader in lightweight high speed diesel power

Cummins Diesels (60 to 600 h.p.) are built for and used by original equipment manufacturers in highway trucks, off-highway trucks, power shovels, scraper units, buses, motor graders, logging yarders and loaders, oil well drilling rigs, electric power generators, irrigation systems, work boats, and pleasure craft.

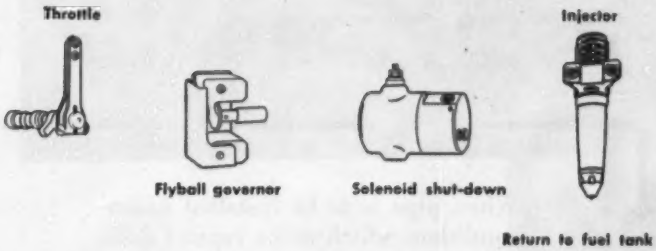

PT advantages over gasoline systems:

- No contact points to adjust
- No condenser to replace
- No spark coil to short
- No wiring harness to short
- No spark plugs
- No vapor-lock problems
- No flooding
- No choking or priming
- No needle valves to clog
- No butterfly valve
- No float level to maintain
- No float valve to stick

PT advantages over ordinary diesel systems:

- No fuel rack adjustments
- No check valves
- No needle valves
- No helixes
- No distributor discs
- No metering pumps
- No high-pressure fuel lines
- No fuel pump timing

...simpler to work with than gasoline carburetion and ignition

Simplest Fuel Metering Device

The principle is simply that the amount of fuel flowing through a fixed orifice varies according to the amount of pressure on the fuel. Pressure is controlled by the throttle on the PT pump. Fuel flow through orifice is cut off as injector plunger, actuated by engine camshaft, moves down to inject fuel.

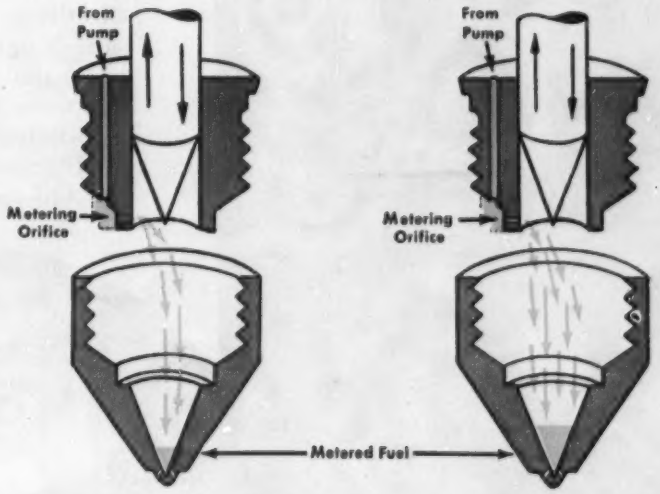

When engine is under partial load, fuel pressure is low, and only a small amount of fuel passes through orifice into injector cup.

When engine is under full load, fuel pressure is increased, and greater amount of fuel passes through orifice into injector cup.

Mail this today, and get more PT facts!

CUMMINS ENGINE COMPANY, INC. Dept. ER-12
Columbus, Indiana

Please send me free illustrated folder, "Cummins PT Fuel System."

Name_____

Company_____

Address_____

City_____ Zone_____ State_____

CUMMINS

For TOUGH assignments

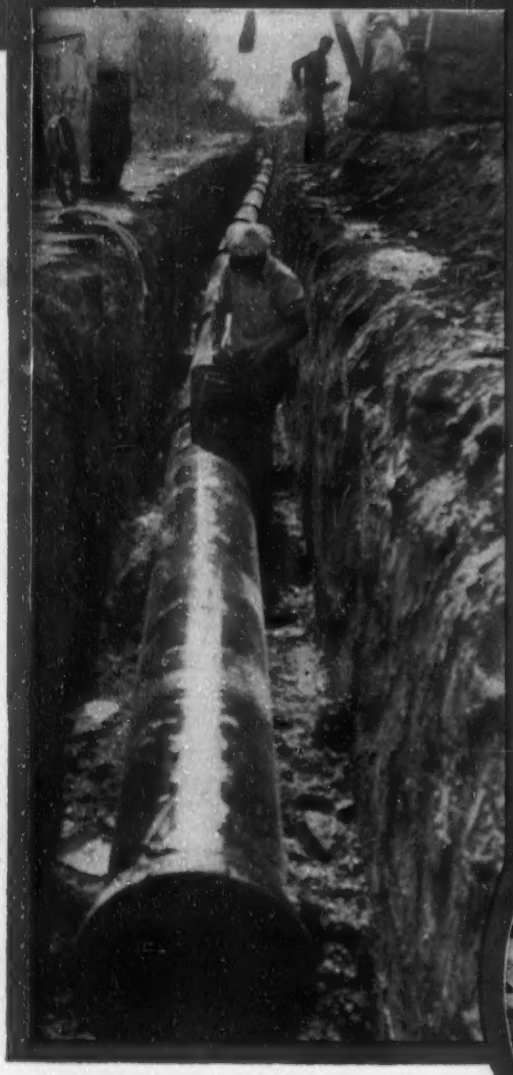

When pipe is to be installed under conditions which make repairs difficult at best, the engineering profession relies on cast iron pipe. Such installations, for example, as outfall sewers, river crossings, and sealed piping in sewage treatment and water filtration plants. *Any* installation, where repairs should be a remote possibility, calls for rugged cast iron pipe. Its great beam-strength, compressive-strength and shock-strength—plus its effective resistance to corrosion—result in long life with negligible repairs and maintenance cost. For information write: Cast Iron Pipe Research Association, Thos. F. Wolfe, Managing Director, 122 So. Michigan Avenue, Chicago 3, Ill.

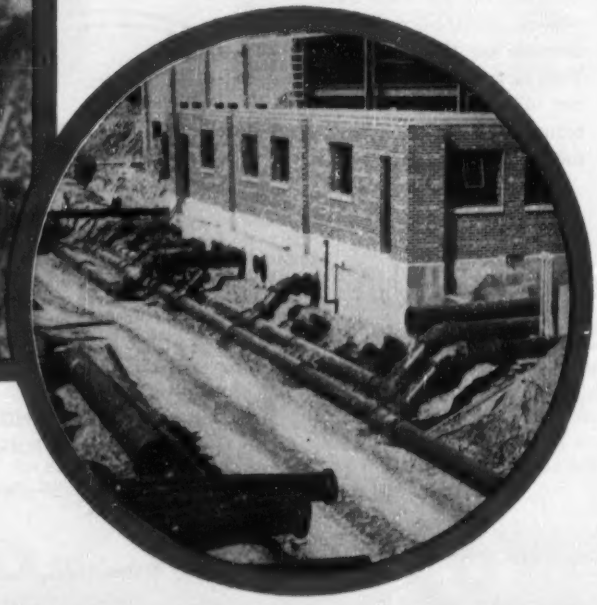

(above)
Installing cast iron belt feeder main for water supply system in Casper, Wyoming.

(right)
Cast iron pipe for discharge lines from water circulating pump house in a midwest oil refinery.

CAST IRON PIPE

use this RUGGED pipe

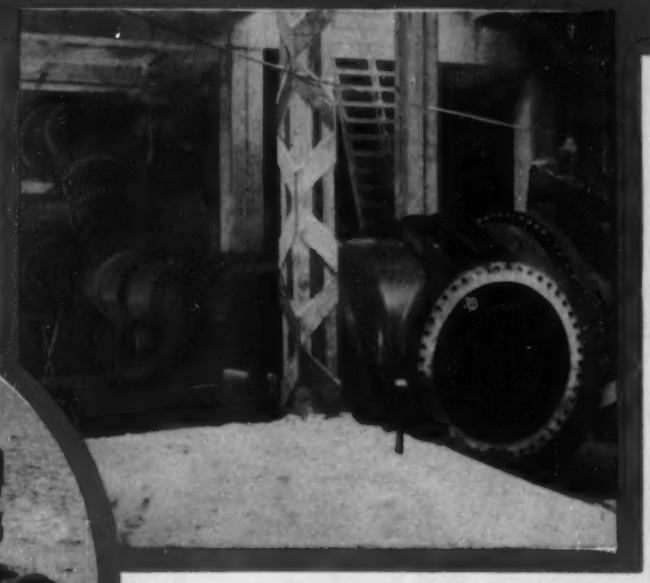

(above)
Cast iron pipe for outfall into St. Joseph Sound from sewage disposal plant at Dunedin, Fla.

(top right)
Cast iron pipe and fittings installed in world's largest water filtration plant in Chicago, Ill.

(at right)
Installing 30" cast iron pipe for sewage treatment plant at Panama City, Fla.

SERVES FOR CENTURIES...

"...we're strong for T5X in Alaska."

Hans N. Lee, superintendent, Rue Contracting Co., Palmer, Alaska

"With the temperature extremes we get in this part of Alaska, it takes a mighty good motor oil to stand up in our hard-working construction equipment here on the Eklutna Dam Project.

"That's why we're strong for T5X in Alaska. It permits easy starting in winter's sub-zero temperatures (we get an occasional 40° *below*). And this same oil protects the engines in shovels, 'cats', trucks, compressors and welders when the mercury hits the 80's during the dusty summer months. Incidentally, let me state what a great job Union lubricants are doing in the clutches on our machinery...Nothing we've ever used has done so much to keep these vital parts safe and troublefree in any weather."

If wide temperature ranges present a problem to your operation, your Union Oil representative has the lubricants which can supply the answer.

UNION OIL COMPANY 76
OF CALIFORNIA

***Los Angeles:** Union Oil Bldg. • **New York:** 45 Rockefeller Plaza • **Chicago:** 1612 Bankers Bldg. • **New Orleans:** 644 National Bank of Commerce Bldg. **Atlanta:** 401 Atlanta National Bldg. • **Kansas City, Mo.:** 921 Rialto Bldg.*

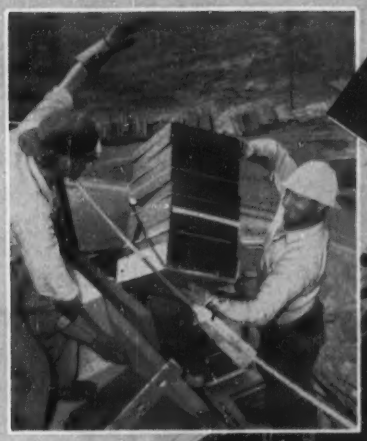

GE picks waterproof, fireproof FOAMGLAS to insulate Atomic Sphere

The G. E. Atomic Sphere is 26 times larger than any previously built. It has a surface area of 139,000 sq. ft. Inset photo shows how easily the lightweight FOAMGLAS blocks were handled by the workmen. This rigid insulation was more than strong enough to support their weight, yet easy for them to cut and shape.

General Electric Company engineers picked waterproof, fireproof FOAMGLAS to insulate the world's largest steel sphere. The Knolls Atomic Power Laboratory, Schenectady, which G.E. operates for the A.E.C., will use the sphere to test the prototype of an atomic powered submarine for the U.S. Navy. *Constant* control of temperatures is a must for worker comfort. Therefore, to insulate the sphere FOAMGLAS was a must because its sealed glass cells can't absorb the moisture that cuts efficiency of other insulations. This guarantees GE *constant*, *long-lasting* insulating protection . . . and fireproof FOAMGLAS reduces external fire hazards which might damage the sphere.

Why not discover how FOAMGLAS can benefit *you?* Send today for a sample and your choice of booklets describing the use of FOAMGLAS to insulate: 1) piping, tanks and other equipment; 2) cold storage space; or 3) normal temperature buildings. Write, indicating your specific interest.

PITTSBURGH CORNING CORPORATION

Dept. K-124, One Gateway Center • Pittsburgh 22, Pa.

FOAMGLAS®

the cellular, stay-dry insulation



Pittsburgh Corning also makes PC Glass Blocks

Another BIG OUTPUT Walking Dragline

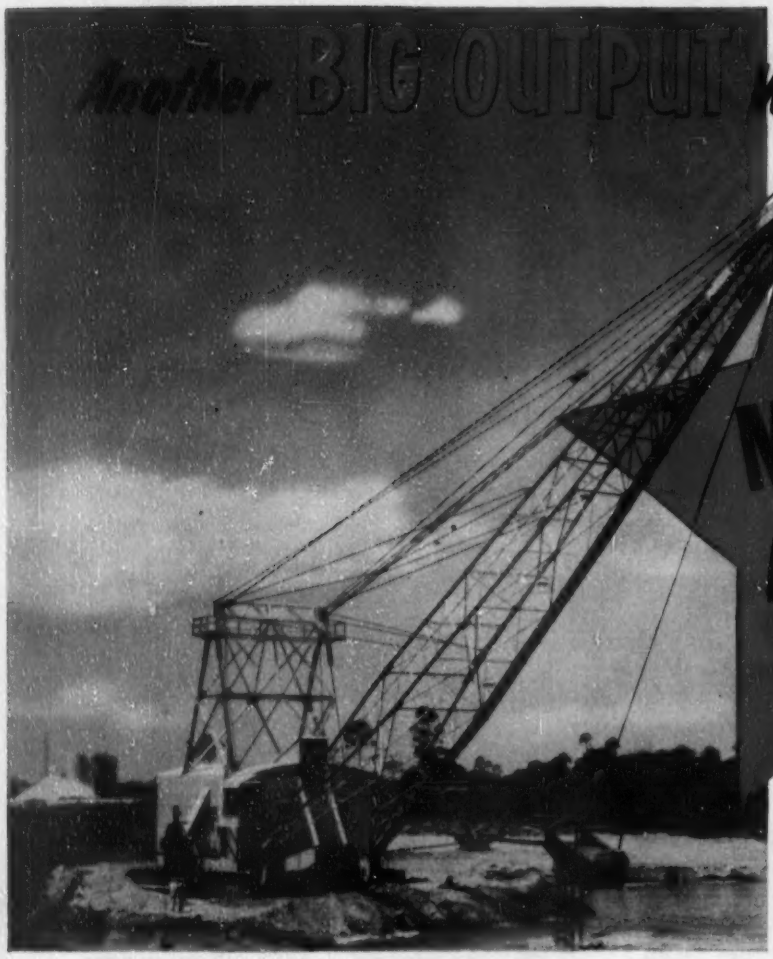

MODEL 400-W

7-to 9-cu. yd. capacity

Here's big news for men engaged in strip mining or heavy-duty construction work — Bucyrus-Erie has added another big-yardage, all-weather dragline to its world-famed "walker" line. You'll find unequalled money-making features in the new 400-W . . . here are some of them.

THREE POWER COMBINATIONS — Your choice of heavy-duty diesel engine, electric power with independent motor-driven drums, and electric power with clutch-operated drums.

EFFICIENT FRONT END — All-welded boom has T-section chord members with tubular bracing for maximum strength, minimum deadweight. Fast filling, clean carrying, quick dumping buckets help assure big output.

LONG WORKING RANGE — Without throwing bucket, material can be moved 405 feet with the 400-W's 200-ft. boom and 7-yd. bucket, 377 feet with the 185-ft. boom and 8-yd. bucket, and 351 feet with the 170-ft. boom and 9-yd. bucket. Digging depths range up to 135 feet.

RAPID OPERATING CYCLE — Fast hoisting and lowering with powerful air-controlled clutches and brakes . . . rapid acceleration and deceleration of the swing under variable-voltage Ward Leonard control.

EXCEPTIONAL MANEUVERING ABILITY — With exclusive Bucyrus-Erie walking mechanism, the 400-W walks where you want it, when you want it, in good weather or bad, even on ground that's too soft for other machines.

STRONG RIGID BASE — Provides 748 sq. ft. of bearing area for full stability in working and walking.

STURDY MAIN MACHINERY — Is simple in design . . . is arranged for accessibility in servicing and maintenance, and for maximum counterbalancing effect . . . is rigidly held in accurate alignment on deep-section revolving frame.

Complete information is yours for the asking — write today!

24L54C

BUCYRUS ERIE

South Milwaukee Wisconsin

ENGINEERING NEWS-RECORD

Vol. 153, No. 24 December 9, 1954

Number of copies of this issue printed: 65,466

CONTENTS

NATIONAL AFFAIRS

Competition in Heavy Construction Is Tough..... 21
950,000 Classrooms Needed in 10 Years..... 22
President Gets Governor's Highway Report..... 23
Great Lakes Need $110-Million Dredging Job..... 24
Los Angeles Committee Recommends Big Sewage Disposal Program 24
Baltimore Tunnel Contract to Be Advertised Feb. 1.. 24
Engineers Attack Landslides at Oahe..... 25
Girder Completes Near-Record Span..... 26
Jobs in the News..... 26

FEATURES

Building Underground Pays in Sweden—Part I..... 33
Underground Room Construction—Part II..... 37
Rig Unreels Wire Mesh Ahead of Canal Paver..... 41
Wall-less Garage Built From Top Down..... 44
Paper Forms Solve Tough Foundation Problem..... 48

MEN AND JOBS

Col. William F. Cassidy Gets South Pacific Post..... 51
Smoke Control Engineer Resigns at Columbus..... 52
Army Engineer Officers Get New Assignments..... 52

RESEARCH

Dynamic Pavement Tester Demonstrated..... 57

NEW PRODUCTS

Vibration Multiplies Effect of Light Rollers..... 61
Instrument Controls High-Speed Cameras in Testing.. 62
Trailer-Mounted Tool Box Offers Mobility, Security.. 62
New Heil Hoists and Dump Bodies Are Weight Savers 63
Kohler Offers Six Models of 15-kw Electric Plant.... 66
Downblow Heater Designed With Removable Fan and Motor 66
Heat Conducting Material Is a Money Saver..... 68
Publications 71

BUSINESS AND FINANCE

November Awards 22% Over October, Set All-Time Record 104
Costs Rise Faster This Year Spurred on by Lumber Strike 108
MC&S Plans to Acquire 3 Other Wolfson Interests.. 109
Activity This Week 109

LABOR

Utilities—Target of the Building Trades Councils... 112
NLRB Applies New Standards..... 112
Compromise Called Key in Wage Arbitration Cases.. 112
Carpenters Show Strength in Apprenticeship Record.. 112

Reader Comment 6
Calendar 6
Washington Observer... 19
City by City..... 27
Legal 74
Obituaries 76
Material Prices 79
Construction Reports... 86
December Scoreboard... 101
Editorials 128

THE CONSTRUCTION WEEK

OUTLOOK GOOD—With predictions of perhaps a bigger year ahead (than 1954) contractors don't seem to have much to worry about, in the field of material supply, anyway.

A spot check of major supply centers across the U.S. by ENR's sources indicates: prices tend to be steady (though there's some fluctuation in lumber with demand); there's no across-the-board shortage of any materials, comparatively little spot shortage (insulation in Cleveland, cement in Detroit, steel sheet piling in Los Angeles).

REDEVELOPMENT PAYS—Pittsburgh's huge redevelopment program—which has and will continue to be big business for contractors—is also big business for the tax collector.

In 1955, assessed valuation of land and buildings in the city is set at $1.2 billion—up $13 million in one year, and up $152 million since the city started refurbishing itself in 1947.

RENEGE ON 'PIKE?—North Carolina's Turnpike Authority found itself in an embarrassing position over money in that discussion of a new turnpike to link the state with Virginia and West Virginia.

The authority had announced approval of a joint traffic survey by a private engineering firm, to cost a total of $96,000. But the North Carolina Highway Commission reminded the turnpike group that only $25,000 of highway funds are available for the survey from funds authorized by the legislature. (Highway Commission engineering forces are counted on to do much of the survey work.)

Said the commission to the authority put up the $7,000 more needed to pay our share.

WHO OWNS ST. LAWRENCE?—The action isn't expected to be a serious obstacle to development of St. Lawrence power—but that court suit filed by an Indian tribe certainly might be expensive.

The St. Regis Indians, through attorneys, filed a suit claiming $34 million from the state of New York. The Indians claim that Barnhart Island—principal site for the power development—belongs to the tribe, along with the river bed and the power intrinsic in the water.

NOT ENOUGH PAY—Like many another public works official, Hawaii's Territorial Public Works Superintendent Ben Nutter is complaining that he can't pay enough to attract men to his engineering force.

His department, said Nutter, hasn't been able to obtain a single 1954 graduate from the University of Hawaii's engineering school. Reason is simple: best he can pay a beginner is $258 a month, while the men can get $300 or more on the mainland—and look to better increases later on.

ADAMS
Motor Grader with Elegrader

Plows and loads clay at rate of 10 yards per minute

The Adams Motor Grader-Elegrader combination pictured above is owned by a prominent contractor. It is shown here loading fill material out of a borrow pit. Cutting up to 24″ deep and 12″ wide, the outfit plows clay and loads trucks at the rate of 10 yards per minute.

On such jobs as loading, stripping, casting in new roads, terracing, etc., this great Adams combination is unsurpassed for economy of operation, ease of handling and dirt-moving ability. On jobs where it has no application, the Elegrader can be easily removed and blade put on for normal grading operations.

Let your local dealer show you how an Adams Motor Grader with Elegrader will step up production, cut costs and increase profits for you.

J. D. ADAMS MANUFACTURING CO. · INDIANAPOLIS, INDIANA

ADAMS

Motor Graders TraveLoaders Pull-Type Graders

WASHINGTON OBSERVER

Selling the President's highway program to various industry groups is getting under way. This week the American Petroleum Institute's board of directors' highway committee—which has been opposed in the past to gasoline taxes for highways—meets in Washington to get the Gen. Clay treatment. The Administration is hopeful it can turn the powerful API around.

Francis Du Pont is getting Administration lines straightened, too. He's pulling together from any and all interested government agencies their thoughts and prejudices so that an agreed program can go to the President, and thence to Congress, in January.

Clay's report will go to the President around mid-month. Count on it being primarily a $25-billion federal program for interstate system construction paid for out of bonds underwritten by the 2-cent federal gasoline tax. The remaining $25 billion will be an Administration hope—selling the states and cities on picking up that part, themselves.

•

Incidentally, Democrats are piqued at state highway officials for ignoring them at the association's Seattle meeting. Democrats had won the election on Nov. 2, but the AASHO invited only Republican congressmen to their meeting. It's more a social faux pas than anything serious, but it might be significant once the Democrats take over next January.

•

AFL building trades now have a kitty to fight John L. Lewis. The mine workers' United Construction Workers have been trying to move in on construction jobs, so far mostly in Pennsylvania. Now four AFL unions—teamsters, laborers, operating engineers and carpenters—have kicked in $15,000 each to drive UCW out of heavy construction and roadbuilding jobs.

The idea is to offer contractors a "package deal" with a promise that there will be no jurisdictional troubles for those who sign up. Also, the unions will make wage concessions if the situation demands.

UCW has been making inroads by having no jurisdictional problems and being able to offer better wage deals than AFL normally can.

•

Watch for the President to come out strong for an increase in the minimum wage. Labor Secretary Mitchell has been pushing to have the minimum fixed at, 85 or 90 cents. Present 75-cent floor was effective in January 1950.

An increase would be felt by everyone—including construction. Reason is that a higher floor tends to push up wage rates in order to maintain traditional wage spreads between different skills and jobs.

•

Urban redevelopment by cities has been upheld again in the Supreme Court (ENR Dec. 2, p. 23). The court followed up its District of Columbia decision of last week with another. It refused to hear a case brought by San Francisco property owners trying to invalidate the California community development law. San Francisco plans to condemn vacant land, and sell it for construction of quality housing.

•

An inventory of state and local public works available for putting into action is about completed. Gen. J. S. Bragdon, the co-ordinator of public works planning for the Council of Economic Advisers, told the mayors' conference he expects some 6,000 to 8,000 items in the canvas, being conducted by the Bureau of the Census.

MORE CYCLES PER DAY

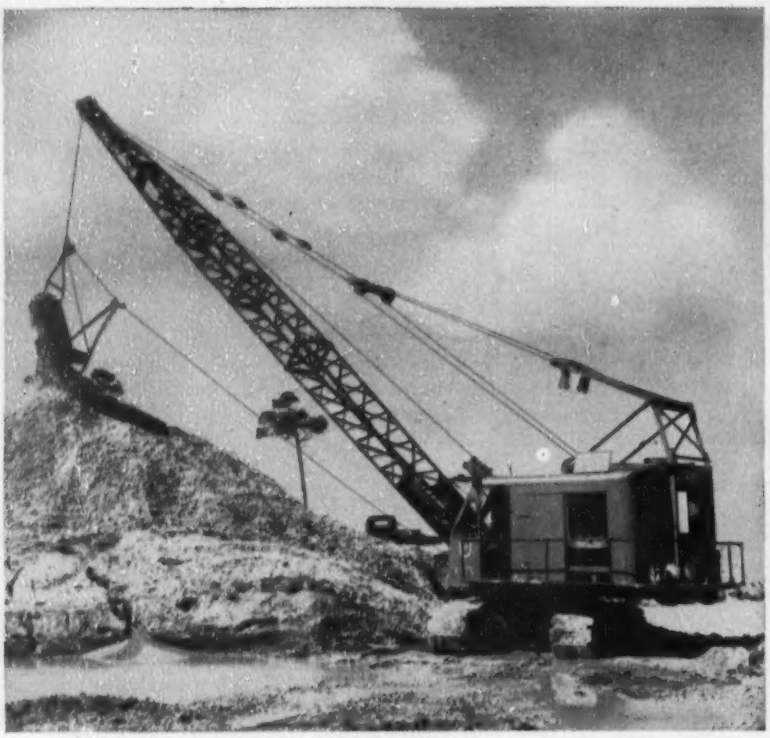

AS A 1¾-YARD DRAGLINE. This fast swinging K-375 rig digs coral rock and sand in Florida. Speed-o-Matic control makes dig-swing-dump one fluid motion because operator has perfect "feel" of the load. There are no grabby clutches that produce lag and lost motion.

AS DEEP-DIGGING TRENCH HOE. This K-360 with 1¾-yard hoe makes full use of its 142 net hp, a natural for those deep, tough sewer jobs.

AS A HEAVY-DUTY 1¾-YARD SHOVEL. High strength components—precision machined—assure profitable, trouble free performance.

K-300 series shovel-cranes with *Speed-o-Matic* control, 142 net hp, plus greater "live weight" can boost your output up to 25%

It's not only how much per bucket—but *how many* buckets per day that piles up profits for shovel-crane owners. Smooth, instantaneous response of Speed-o-Matic power hydraulic control means faster, more productive cycles. Gives operator positive control for pinpoint accuracy and maximum safety. Cuts end-of-day fatigue too!

The 142 usable net hp gives you more digging or lifting power. And it has the built-in stamina and "live weight" necessary to produce under continuous use of this extra horsepower.

Equally important, with full convertibility you have maximum use of your K-300 rigs for hundreds of 1¾-yard jobs. Ask your distributor, or write for K-300 series literature now.

13,826-A

LINK-BELT SPEEDER CORPORATION
Cedar Rapids, Iowa

BUILDERS OF A COMPLETE LINE OF CRAWLER, TRUCK AND WHEEL-MOUNTED SHOVEL-CRANES

LINK-BELT SPEEDER

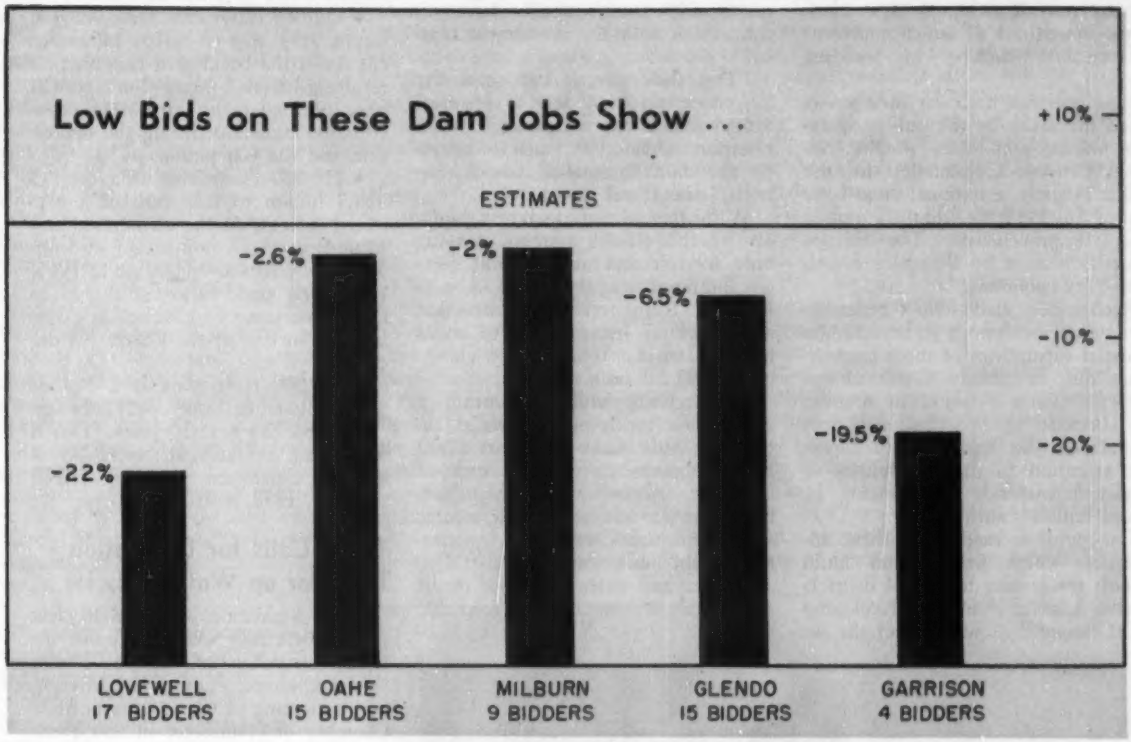

Competition in Heavy Construction Is Tough

Keen competition in bidding on federal dam jobs—and for many other public works contracts—is cutting the cost of these projects well below estimates. And it is encouraging government officials to get as many contracts out for bids as their budgets allow.

On nine recent water resources contracts, low bids totaled $52.5 million instead of the nearly $62 million the estimators had figured. This gave the Army Engineers and the Bureau of Reclamation more than $9 million extra to spend for other work on the same projects.

On five jobs (chart above) on which bids were opened or contracts awarded within the last month or so the low bids were below estimate in every case—sometimes far below what government experts had figured the cost of the job would be.

Part of the reason for this situation is the fact that there have been fewer new starts in big federal water resource development projects. But the stabilizing of construction costs and improvement of contractor operations on the job also are responsible for the below-estimate bidding.

Although the record is most striking in bidding on federal dam jobs, the same situation also applied to other heavy construction work. For example, the Indiana Toll Road Commission has announced that construction contracts for the 156-mi East-West Turnpike are 26.5% below estimates.

About 60% of the contracts for the turnpike have been let. If the bidding is proportionately low on remaining contracts, the total savings on the job—originally estimated at $176 million—will amount to $35 million.

• **But costs are up**—This competition for jobs, combined with the fact that materials and labor costs are rising, has put the squeeze on the profits of many contractors.

The ENR Construction Cost Index in December was at a record high of 643.31 (1913 base year was 100) in December—a rise of 5.2% in the wage rates and materials prices contractors paid during the last 12 months. This compares with an increase in the same costs of 4% during 1953 (page 108).

But, while bids are running below estimates—they averaged 10% to 15% below in the first half of this year—there are indications that the spread is beginning to narrow. Bids on highway construction in California and Colorado during the third quarter of this year climbed almost 10% above second quarter levels and brought to an abrupt halt the rather sharp downtrend which carried through the first half of the year.

Some firming of bid prices also is evident in the Bureau of Public Roads Composite Mile Index for federal-aid highway work. This index continued to decline in the third quarter. But it was a very slight dip.

The outlook for 1955 is for bidding on heavy construction jobs considerably closer to engineering estimates. Indications are that most contractors have about reached the limit in trimming those costs which they can control. But competition for jobs is likely to continue to be keen.

950,000 Classrooms Needed in 10 Years

Citizens Commission report indicates authority-financing may be necessary to handle $32-billion contruction needs

School construction totaling $32 billion is required over the next decade to provide 950,000 new classrooms—one-third of which represent the current backlog of building needs.

This goal has been set in a report issued this week by the public education finance committee of the National Citizens Commission for the Public Schools, a national civic body formed in 1949 to stimulate public school improvements. The finance group is headed by Beardsley Ruml, New York economist.

Recognizing that school construction needs are now way beyond the financial capabilities of most communities due to already over-burdened property tax as a source of revenue and because of constitutional debt limitations, the report draws particular attention to the possibilities of greater dependence on financing by school building authorities.

The point is made that these authorities—which finance and build schools for leasing to school districts—have a better chance of developing credit ratings that will attract the ordinary investor of municipal bonds than the thousands of local government units that normally have no connection with the investment market.

"The state governments and the big cities can tap pools of financial capital which are adequate; but the situation is different when it comes to the 60,000 smaller school districts," the Ruml report noted.

With the annual operating budgets of the school systems carrying only interest and amortization costs on buildings leased by the authorities, the Ruml report estimates that all the schools needed by 1965 could be built with a total budget charge of only $2 billion a year.

The report, while presenting a strong case for resort to special authorities, also listed objections raised by the opponents of this form of financing. Among objections which the report said had been raised, are:

- Authorities circumvent constitutional debt limitations.
- Cities and states with good credit ratings can borrow at more favorable rates.
- Poorer school districts may be unable to afford the rent on the buildings constructed by the authorities.

Using U. S. Office of Education school facilities survey figures and cost factors (ENR Feb. 11, p. 27), the Ruml report breaks down the 10-year, $32-billion, 950,000 classroom requirements program as follows:

- 312,000 classrooms for 8,900,000 pupils at a cost of $10.6 billion to cut down the backlog of construction resulting from population growth plus postponement of normal construction programs during the depression and the war period.
- 420,000 classrooms at a cost of $14.3 billion to take care of a projected increase in the elementary and secondary school population of from 36,000,000 to 48,000,000 up to 1965. (Assuming same ratios of pupils to rooms and same cost factors as calculated in surveys of the Office of Education.)
- 220,000 classrooms at a cost of $7.5 billion to cope with obsolescence over the next 10 years. This is based on a replacement rate of 2% of existing classrooms per year (ENR April 17, 1952, p. 101).

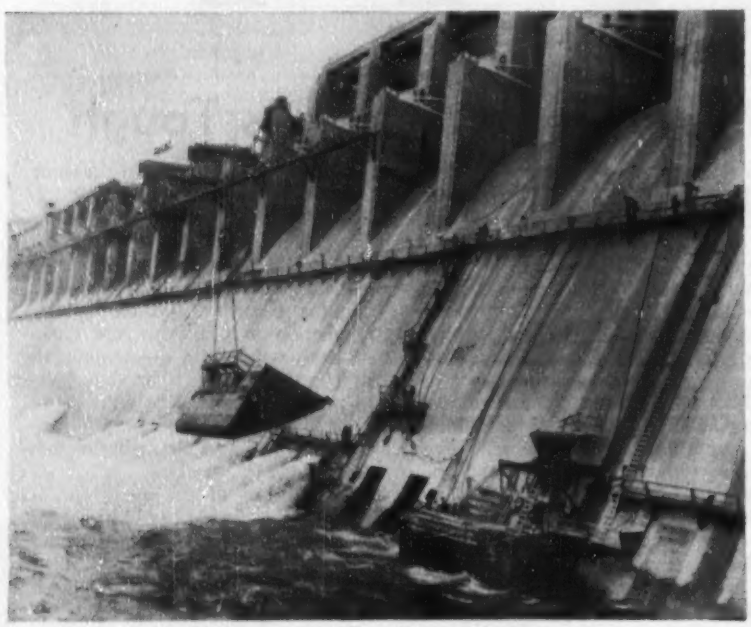

Plugging the Sluices at Chief Joseph Dam

The 24 sluiceways that carried the river's flow during construction of Chief Joseph Dam now are being plugged with concrete to force water over the 174-ft crest of the big dam's spillways. To close the 8x16-ft openings, heavy steel gates are lowered in front of the upstream openings. Then, an open caisson (above) is placed on the face of the dam around the downstream openings. After the dammed-off space is dewatered, grout is pumped in through pipes under pressure to plug the gaps.

Tudor Calls for Legislation To Clear up Water Policies

Much legislation is needed to clear up conflicts now existing in our national water policy, Ralph Tudor, former Undersecretary of the Interior, told a meeting of the California State Chamber of Commerce in San Francisco.

Tudor told the audience of California industrial and agricultural leaders that specific and official recommendations would be forthcoming soon. The Hoover Commission will report to Congress, and the Cabinet Commitee on Water Resources will report to the President.

Tudor said water resource development should be conducted on a drainage basin basis. Master blueprints should be prepared under an interagency committee, although that doesn't necessarily mean a federal agency should do the building job. Tudor said he does not favor valley authorities.

Tudor stated his belief that consolidation of the Corps of Engineers, the Bureau of Reclamation and the Soil Conservation Service would accomplish no great good. There is, however, a conflict of laws under which these agencies operate, he said.

A competent, independent review board is needed, according to Tudor. This will help assure uniform administration and help prevent individual agencies from justifying pet projects that might be unsound.

President Gets Governors' Highway Report

Key recommendation calls for federal government to spend $25 billion on the interstate system during next 10 years

The executive committee of the Conference of Governors last week approved and sent to the White House a special report prepared by its highway committee urging the federal government to spend $25 billion for construction on the interstate highway system during the next 10 years.

The report was the result of studies conducted by the governors at the request of President Eisenhower who proposed last spring that the nation should increase its spending on highways by $50 billion during the next 10 years.

Gov. Kohler of Wisconsin was chairman of the special committee that drafted the report. It is said to contain 85 pages of factual data. The nine-member executive committee, headed by Gov. Robert Kennon of Louisiana, approved the report in a closed meeting. The report then was sent to the White House with a copy to Gen. Lucius Clay, chairman of the President's special highway advisory committee.

• **Six major recommendations**—Gov. Kennon issued a statement interpreting the special report of the Kohler committee. It said, in effect:

• An adequate highway construction program based on present and future needs for the next 20 years will require double the present and projected rates of federal, state and local expenditures.

• If such a program is undertaken, the various highway systems should be divided into three categories, for purposes of financing. They include: the 40,000-mi interstate system including essential urban access roads; other federal-aid systems; and the state and local systems.

• Since the national government has a major and over-riding interest, both military and civil, in the interstate highway system, it should assume primary responsibility for financing the construction of the interstate system.

• Federal funds totaling about $25 billion needed for financing construction of the interstate system during the next decade could be secured from general revenue; by the issuance of bonds or other securities in anticipation of future general revenues; or by the establishment of a national road financing authority.

• The states or their political subdivisions, as each state may determine, will be responsible for the actual construction, maintenance, administration, and policing of the interstate system.

• The states and their localities will continue to have primary responsibility for the construction of all other systems, with the proviso that as long as the national government levies excise taxes on motor fuels, lubricants and motor vehicles, it will continue to make allocations to the states for highway construction on the other federal-aid systems, at least at the rate obtaining under the Federal-Aid Highway Act of 1952 and in accordance with existing formulas.

Approval of the six-point highway report was well timed. The executive committee meeting was held just prior to the three-day conference of the Council of State Governments. This permitted presentation of the report in broad outline as part of a panel discussion of highway construction and financing.

Upwards of 300 state officials—including top highway officials, legislators and a dozen governors—were on hand to learn the details of the plan to double the rate of roadbuilding for the next 10 years and meet the goals of the President's $50-billion program.

• **Clay committee's views**—The fact that Gen. Lucius D. Clay was one of the panel members added interest to the meeting. Gen. Clay was in complete accord with Point 4 of the governors' report, that the interstate highway should be built with $25 billion of federal funds.

This $25 billion of federal funds for interstate highway construction, said Gen. Clay, will be only about one-half of the 10-year, $50-billion program. The remainder would be chiefly the responsibility of state and local interests.

Gen. Clay pointed that the states would receive credit for such portions of their highways as meet the standards and qualify as part of the interstate system.

Gen. Clay said none of the $25 billion of federal funds for interstate highways would be used as a replacement of other roadbuilding funds.

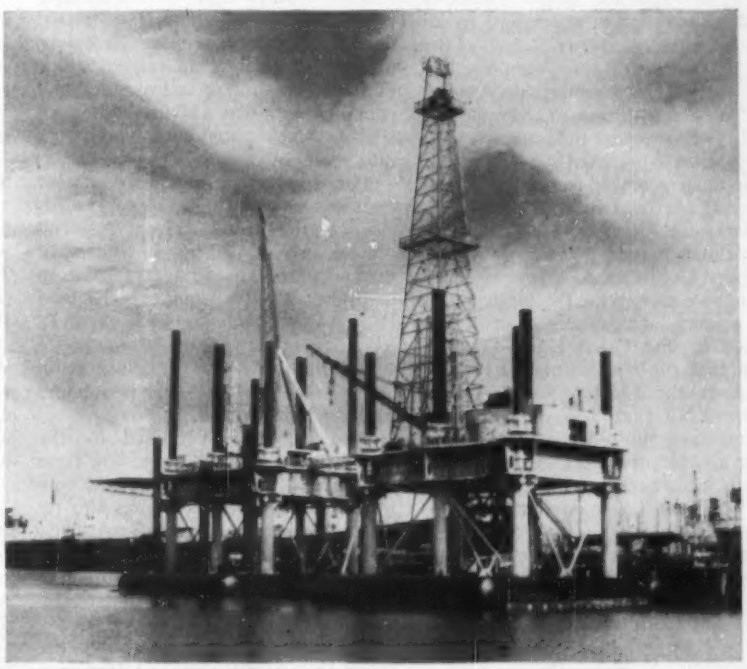

"Mr. Gus" Wades Deep

This mobile offshore drilling rig is named for Gus Glasscock of C. G. Glasscock Drilling Co., which owns and operates it under contract with Shell Oil Co. It is designed to operate in water up to 100 ft deep and is now drilling its first well off the Texas Coast. The drilling platform (right) and the service platform (left) are towed separately to the drilling site. Hydraulic jacks force the 4-ft dia corner piles into the ocean floor. The lower hulls are then water-filled and sunk, helping the piling support the upper hulls and increasing the unit's stability.

Lake Channels

Army Engineers' report says Great Lakes need $110-million dredging job

Plans for deepening of Great Lakes connecting channels at a construction cost of nearly $110 million got a boost from the Corps of Engineers last week. Col. W. P. Trower, Great Lakes Division Engineer, and his district engineers recommended that the United States deepen the channels to accommodate the bigger ships which will enter the lakes through the St. Lawrence Seaway.

Washington observers expect Congress to vote money for the project before the next session comes to an end, but several steps remain to be taken before Congress can act.

To start with, proponents and opponents of the channel deepening have until Dec. 30 to present their views in writing to the Board of Engineers for Rivers and Harbors, in Washington, D. C. The board will arrange hearings if necessary.

Early next year, the board will report its findings and recommendations to the Chief of Engineers, Maj. Gen. Samuel D. Sturgis. Gen. Sturgis then will submit a report to the governors of the Great Lakes states and to all interested federal agencies—such as the Budget Bureau and the Commerce Department—for their comments. As soon as the comments are in, Sturgis will send his final report to Congress, with the comments attached.

No delay is looked for in getting the approval of the Public Works Committees of the two houses. Favorable action may be predicted for the Appropriations Committees, which will have to approve money for the project.

Engineer recommendations submitted by the Great Lakes Division show that the cost estimate has gone up from the $100 million reported earlier (ENR June 3, p. 21). Price increases since the older estimates were made and minor modifications account for the higher estimate.

The Great Lakes engineers recommend that both the downbound and upbound channels be deepened to 27 ft in the St. Mary's River, Straits of Mackinac, St. Clair River, Lake St. Clair and Detroit River.

The existing federal project for the connecting channels calls for a controlling depth of 25 ft for downbound traffic and 21 ft upbound, when the ore carriers are less heavily laden. Some $40 million to $50 million of dredging work remains to be done on the presently authorized project.

Increased construction cost of the greater 27-ft depth is estimated at $109,027,000 by the Great Lakes Division. The deepening also would increase maintenance costs by $200,000 a year, the engineers say.

Vessels of 27-ft draft will be able to pass through the locks of the St. Lawrence Seaway. Even at the new channel depth recommended, the controlling safe draft for the Great Lakes connecting channels will be from 1½ to 3 ft less than in the Seaway.

Based upon the record of lake levels since 1922, the engineers estimate that vessels of 24-ft draft can pass safely through the deepened connecting channels practically throughout the entire year.

Savings to Great Lakes commerce economically justify the cost of deepening the connecting channels to 27 ft, say the Corps of Engineers field officers in their report.

Sewage Disposal

Los Angeles committee recommends big program

A citizens' committee has come up with recommendations aimed at solving Los Angeles' complex—and hotly debated—sewage disposal problem.

The solution would involve a $45-million bond issue; Hyperion disposal plant from a high-rated activated sludge facility to primary treatment use only; extending an existing 12 ft dia, mile-long outfall to five miles; and constructing a new 180-in. dia line for sludge disposal extending about 7½ mi into the ocean.

The committee of 23 prominent citizens, appointed by Mayor Norris Poulson (ENR Feb. 25, p. 26), employed two consulting engineers to work separately in aiding the group in its studies. The two engineers—Richard Pomeroy of Pasadena and Richard R. Kennedy of San Francisco—came to substantially the same conclusions on altering the functions of Hyperion and extending the outfall.

Basic conclusion reached by the committee is that all sewage flow from the area of Los Angeles should continue to go to the Hyperion site (at Santa Monica Bay) for discharge.

The committee's prime objective is the selection of a plan to assure protection of bathing beaches and recreational areas in Santa Monica Bay.

Consulting engineers assured the group that modifications at Hyperion would improve conditions; the longer outfall would discharge deep enough to assure diffusion, and there would be a good possibility that effluent would never reach the ocean surface.

Indications are that the city council will adopt the proposals and submit a bond proposal to voters in April.

Baltimore Tunnel

$36.7-million contract on big harbor tunnel job to be advertised Feb. 1

The first—and by far the biggest—contract for construction of the $130-million Baltimore Harbor Tunnel will be advertised about Feb. 1, 1955, the Maryland State Roads Commission announced.

The contract will cover dredging of the trench tunnel, fabrication of the tunnel tube sections, construction of ventilator shafts at each end of the tunnel and tunnel paving and finishing. Total amount will be about $36.7 million. Some 3.3 million cu yd will be dredged in the trench tunnel. Construction is expected to start about April 1.

Total construction cost of the 1.7-mi crossing is expected to amount to $94 million. Cost of land and right of way, engineering fees and administrative expenses will bring total cost to $130 million.

The commission said several additional contracts would be advertised "a few months" after the first contract. These will include two $2.7-million contracts for construction of cut and cover tunnels and open depressed ramps at each end of the project, and two $1.6-million contracts for construction of ventilation buildings at either end.

The final contract for the project is scheduled to be advertised on Nov. 15, 1956. A total of 25 contracts will be let.

With normal weather conditions, construction will require 32 months embracing three construction seasons. The commission hopes that the project will be completed by December 1957.

The tunnel will be a twin-tube structure providing four lanes of traffic. Each tube will have a roadway width of 22 ft and a sidewalk 2 ft. 8 in. wide. Vertical clearance above roadway elevation will be 14 ft.

Prefabricated tunnel sections each 300 ft long will be floated into place and sunk on sandbeds in a dredged open trench. After the sections are connected, the trench will be backfilled to provide a cover of not less than 5 ft over the tunnel.

Short sections of cut and cover tunnels at each end will be constructed in the dry of structural steel bents and reinforced concrete. The tunnel roadways will be brought to the ground surface by open ramps of reinforced concrete. Maximum roadway grade will be 3½%.

J. E. Greiner Co. is consulting engineer for the project.

DRILLING an angle-hole in the shale bank above the dam's stilling basin.

Engineers Attack Landslides at Oahe

Landslides in shale banks, long an engineer's nightmare, are being thwarted by drilled ground water drains at the Army Engineers' Oahe Dam, near Pierre, S. D. Placed at a nearly horizontal angle, the drains relieve water pressure that might trigger destructive slides.

The use of the angle-hole technique did not originate with Army Engineers. It has been used elsewhere, particularly along the Pacific Coast. But the Oahe Dam work is both the largest single application and the first use of the technique in a rock mass.

The angle-hole protection at Oahe safeguards the dam's stilling basin, a multi-million-dollar concrete layout as big as five football fields. To place the stilling basin, engineers had to notch down 260 ft into a shale bluff. They cut the bank back into an easy one-on-five slope to minimize shale slides.

In normal circumstances, such a cut-back would make the bank safe against slides. But Oahe's Pierre shale formation isn't normal. It is fractured with fault and joint planes and is horizontally separated by seams of slippery bentonite. The shale slides as easily as sugar in a teaspoon. Bentonite in its completely weathered state is much like axle grease.

"We're not afraid of shale. But we do respect it," said Stanley F. Gizienski, head of special studies and foundation design for the Omaha district.

The trigger mechanism in slides is ground water pressure. Ground water can be potent stuff. It tends to loosen the earth and let it drift off horizontally. Loose soil can move around and adjust its contours to accommodate itself to the water pressure.

The stilling basin at Oahe disturbed nature's equilibrium by carving out a set of contours different from the natural ones. Acting on the earth mass was ground water that in places was 180 ft above the stilling basin.

The forces involved were tremendous. Engineers calculated that, in the spillway area, ground water was exerting 3.5 million tons of force upward. At the same time, it was pushing the earth toward the spillway excavation with 43,400 tons of force.

Obviously, the way to insure against slides was to ease this pressure. This could be accomplished by intercepting wells. But because of the steep dip of the fault planes ordinary vertical wells wouldn't do the job. Instead, wells had to be driven horizontally so as to intersect as many of the fault and joint planes as possible.

The drilling of these wells, which require special procedures, now is going on. They are being drilled 600 ft deep, and the probabilities are that the depth will be increased to 1,000 ft. Three holes have been completed. Tentative plans call for 25 additional angle-holes. They are spaced about 100 ft apart.

The holes are 8 in. in diameter. Inside each is set a 2-in. perforated pipe of plastic (the chemical-laden ground water would quickly corrode metal). Porous sand and gravel then is blown in to pack the hole. The first three test holes have been flowing about 1,000 gal a day.

Piezometers are being installed at strategic points in the area to give a check on the water table and to warn against a dangerous level. The angle-hole program, carried out by Army Engineers themselves, is being rushed so as to be finished before next spring's thaw, when the ground water will be at peak level.

Engineers calculate that the angle-holes will increase the safety factor against slides by 15%. Draining the water will reduce the uplift force by two-thirds. The horizontal water pressure will be reduced by nearly half.

The alternative to the relatively inexpensive holes would have been to excavate the earth slope to a flatter grade than was used. This would have run into expensive grading costs.

The studies and plans for the angle-holes were under the supervision of Henry A. Sikso, chief of the foundations and materials branch. Taking part in the studies were John A. Trantina, chief of the geology section; D. K. Knight, chief of the embankment, pavement and materials section, and Gizienski. The work in the field is under the supervision of John Sfbert, Oahe area engineer, and under the direct supervision of Lloyd Underwood, project geologist.

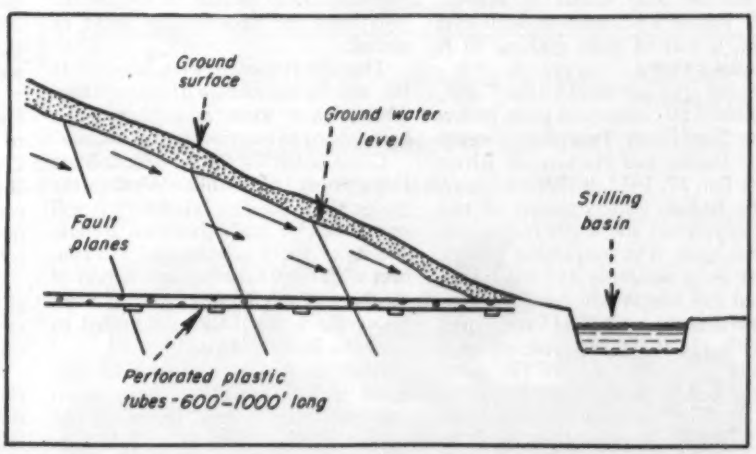

DRAINS intersecting fault planes are flowing at the rate of 1,000 gal per day.

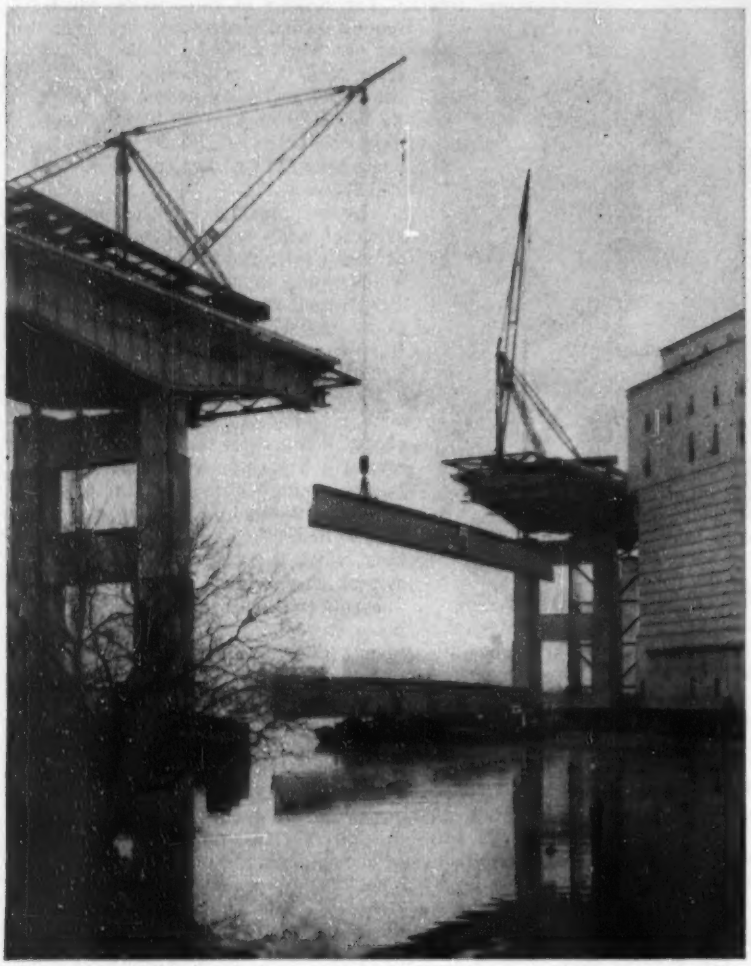

SUSPENDED SPAN of 348 ft over Buffalo Ship Canal was closed with a 208-ft girder, 120 ft above the water. Cantilevers supporting the girder extend 70 ft from the piers.

Girder Completes Near-Record Span

One of the longest steel girder spans in the country is being erected over the Buffalo Ship Canal at Buffalo, N. Y. Part of a $12-million, high-level bridge, a pair of plate girders, 40 ft c-c, span 348 ft.

Record span for the U.S. is 375 ft, established by continuous plate girders in the New Jersey Turnpike crossings of the Passaic and Hackensack Rivers (ENR Jan. 17, 1952, p. 30).

The Buffalo girders consist of two 70-ft cantilevers and a 208-ft-long suspended span. The suspended girders, 12½ ft deep, weighing 167 tons, were erected full length late last month.

Two derricks each of 115-ton capacity with 115-ft booms, were set atop the piers on either side of the crossing for the purpose. They lifted the steel from a barge on the canal and held it 120 ft above the water until the girders could be connected with a 13-in.-dia pin to the cantilevers. Because of the great length of the suspended span, the girders were braced with erection frames located 30 ft from the pins until the floor system could be placed.

The 208-ft girders were brought to the site by railroad in three sections. There, they were assembled on a barge, prior to erection.

Constructed for the New York State Department of Public Works, the bridge skirts the Erie lakefront. It will speed flow of traffic between Buffalo and its southern suburbs and will connect with the 25-mi Niagara section of the New York State Thruway. Next spring the bridge will be extended to cross the Buffalo River.

Bates & Rogers Construction Co. is the prime contractor for the superstructure. Steel is being fabricated and erected by the Bethlehem Steel Co., with G. B. Shaw, Jr., managing erection.

Jobs in the News

OFFICE BUILDINGS—George A. Fuller Co., New York, N. Y., has been awarded contracts for construction of two office buildings on Park Ave. in mid-town New York City. One will be a 34-story headquarters building for Seagram Distillers Corp.; Pereira & Luckman, New York, are architects. The other—a 30-story office building for a syndicate represented by George J. Engler, New York—is designed by Kahn & Jacobs, New York. Estimated cost of each is $15 million.

DAM—Merritt-Chapman & Scott, New York, N. Y., and Savin Construction Corp., East Hartford, Conn., submitted the low bid for construction of Gorge High Dam on Skagit River for City Light Department, Seattle, Wash. Amount of bid was $14,731,000.

DEVELOPMENT—The first section of a $22-million residential development in Norwood and Westwood, Mass., will consist of 600 residences. These will be built by Norwood Properties, Inc., Boston, under separate contract at an estimated cost of $8 million. Lester N. Lechter, Boston, is architect.

Illinois Reduces Program For Building Toll Roads

Plans of the state of Illinois to build 476 mi of toll highways at an estimated cost of $563 million (ENR June 10, p. 23) have been cut to 193 mi at a cost of $390 million. All work on the reduced program is in the northern part of the state.

Included in the revised program are three projects:

The Tristate route, 80 mi long, which begins with a connection with the Indiana Turnpike at the Indiana-Illinois state line, bypasses Chicago to the south, west and north, and terminates at the Illinois-Wisconsin line.

The North Illinois route, 88 mi long, which starts from a connection to Cicero Ave. on the north side of Chicago, runs west to the outskirts of Rockford, and then north to the Wisconsin line near Beloit, where a connection could be made to a proposed toll road across Wisconsin to St. Paul.

The East-West route, which starts at the Tristate route on the west side of Chicago and extends to Aurora, a distance of 25 mi.

Postponed is a proposed continuation of that East-West route across the state to Rock Island and a proposed toll road across the southern part of the state from East St. Louis to the Indiana line near Terre Haute.

CITY BY CITY

Positive Reaction

Detroit—For six months Detroit officials have been debating the merits of a proposed $15.5-million program to provide off-street parking facilities for some 7,500 cars. Now a favorable report from a recently completed survey may settle the question.

The survey by the New York engineering firm of Parsons, Brinckerhoff, Hall & Macdonald confirms the feasibility of the Municipal Parking Authority's parking program. The work reportedly could be financed by revenue bonds over a 40-year period, or possibly within 30 years.

If the program is approved by the city's common council, the new facilities could be in operation within three years.

The authority's plan calls for construction of four garages (one of them underground) in the downtown business district. Total capacity: 2,980 cars. Cost: some $8.5 million.

In addition, the Civic Center on the Detroit River would get five parking facilities: a 660-car garage costing $1.5 million at the Henry & Edsel Ford Auditorium; two garages, a parking lot and a roof parking lot for the proposed Convention Hall and Exhibits Building, costing a total of $4.5 million and able to hold 2,853 cars.

Four more lots in outlying areas would take care of 1,045 cars, cost $814,000.

Wasting No Water

Denver—The Denver Water Board—beset by continuing drought and unprecedented residential expansion—has ordered commercial and industrial water users to install re-circulation devices to conserve water.

The order requires installation of re-circulation equipment by existing buildings, businesses and industries with cooling or air-conditioning systems having a capacity of two tons or more of refrigeration, and those using more than 20,000 gal of water per month in cooling, heating or industrial processing. All new systems installed after Dec. 15 must be equipped with approved conservation devices.

Re-circulation devices will reclaim at least 90% of the water used for cooling, heating or manufacturing purposes. And they will save some 12,000 acre ft of water annually—enough to supply all needs of 48,000 persons for one year.

(*Continued on page 30*)

THE LIFT OF THE TIDE and Expert "Know-How"

This dredge weighing 181 tons was drawn from a creek at Repaupo, N. J., moved 5½ miles and launched in the Delaware River. Additional equipment, a total of 250 tons, was also moved in 20 loads.

A special ramp was built at the river, the dredge "winched" into position and the lift of the 6 foot tide used to float the dredge.

Two weeks were required for this entire operation. But the actual moving was done in one day on two Rogers 50-ton low bed trailers and two Rogers 75-ton dollies.

"KNOW HOW" based on long experience was displayed by E. A. Gallagher of Philadelphia in this unusual move. Apparently, too, they KNOW that Rogers equipment can't be beat for these difficult operations.

135 Orchard St.

EXPERIENCE Builds 'em

ROGERS HEAVY DUTY Transport Trailers

PERFORMANCE Sells 'em

ROGERS BROS. CORP. ALBION. PENNA.

Export Office: 50 CHURCH ST., NEW YORK 7, N.Y. U.S.A.

Cable Address: BROSITES

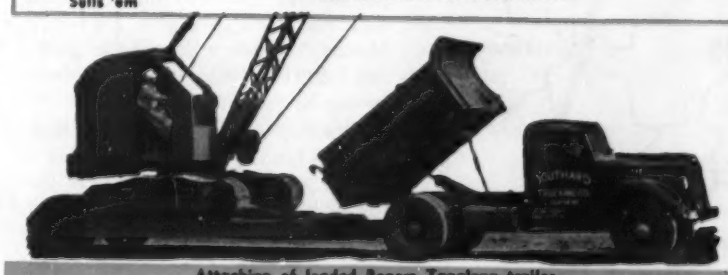

Attaching of loaded Rogers Tagalong trailer

West Virginia Turnpike: A Salute to Construction Skill

280 units of CAT* equipment helping contractors complete $100,000,000 job on schedule

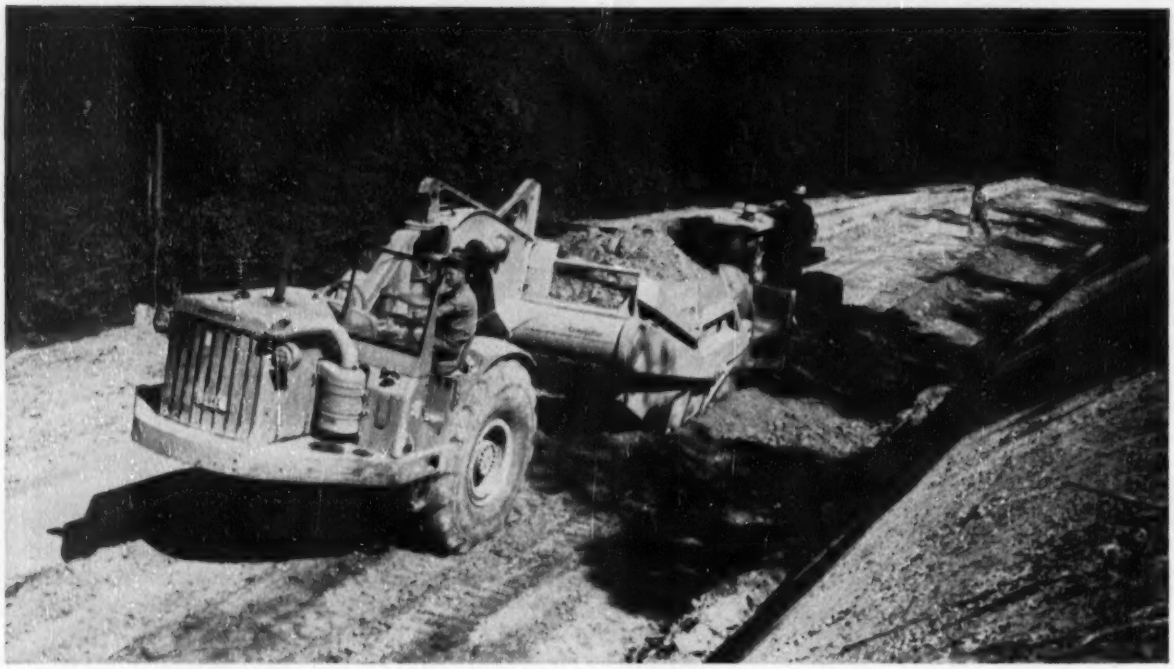

A DW21 with No. 21 Scraper, owned by Oman Construction Co., is push loaded on a section of the turnpike near Beckley, W. Va.

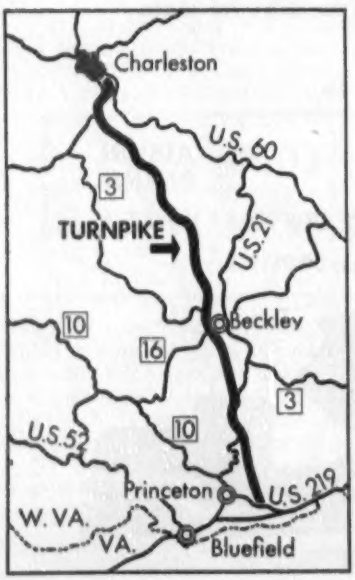

The 88-mile West Virginia Turnpike is expected to be ready for use this fall. Built through mountainous country for most of its length, the project has required moving some 31,000,000 cubic yards of earth for fill. During the spring and summer 3,000,000 tons of crushed rock has been spread in a 14-inch blanket, the full width of the grade, and 1,600,000 square yards of concrete paving have been laid.

This huge earthmoving job has been handled fast. During good weather a million cubic yards a week was the regular rate, and a high percentage of the material was rock.

With a maximum grade of 5 per cent, the new turnpike follows the sides of valleys throughout much of its length. The standard roadway is 50 feet wide, but many miles of extra-width grade have been built to take care of future dualization. Starting at 600 feet elevation in the Kanawha Valley near Charleston, the highway climbs to a maximum of 3200 feet at Flat Top, then descends to 2000 feet at Princeton.

It is expected to cut driving time by half, reducing over a thousand curves in the old road and shortening the distance by 32 miles.

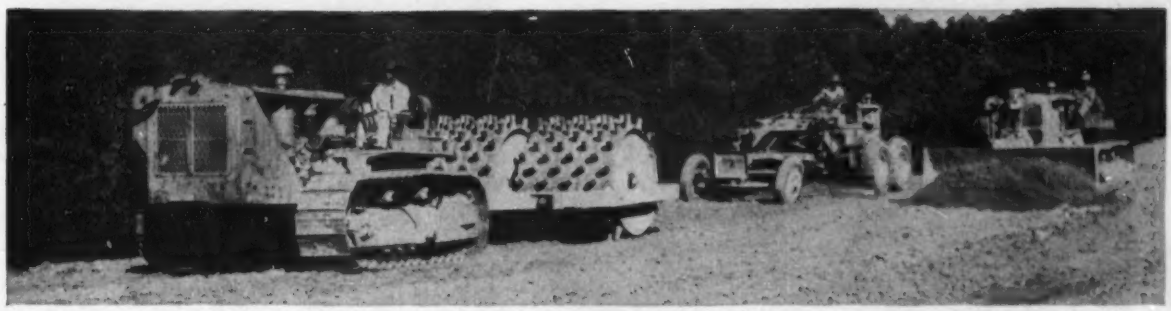

Pulled by a Caterpillar Diesel D8 Tractor, this sheepsfoot tamper compacts earth on the Beckley section of the turnpike.

This Cat No. 12 Motor Grader works over new fill while a DW21 wheel Tractor speeds past for another load.

Caterpillar DW20 Tractors with No. 20 Scrapers are used by Clark, Farrell & H. N. Rogers to move earth near Pax, W. Va.

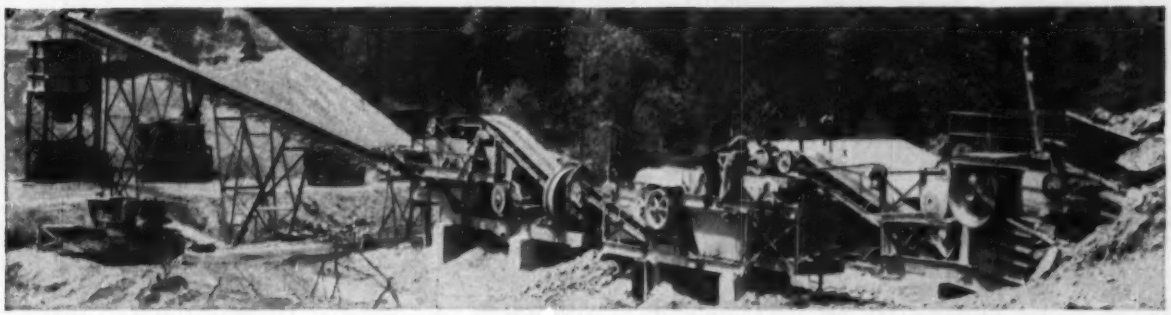

Two big Cat Diesel Electric Sets—a D386 and a D364—furnish all power for this crusher plant, operated by Central Materials Corp., near Kingston, W. Va.

Scores of contractors and subcontractors have shared in this accomplishment. And everywhere along the construction route the famous "highway yellow" of Caterpillar* heavy-duty machines has been in evidence. Included in the equipment are D8, D7 and D6 Tractors, DW20 and DW21 wheel-type Tractors, matching Caterpillar-built Bulldozers and Scrapers, Motor Graders, Cat Engines and Electric Sets powering shovels, compressors, crushers and light plants.

Experienced contractors know machines built by Caterpillar are money-makers. They can be depended on to stay at work month after month, under all conditions, with a minimum of down time. And when service or parts are needed, they can be supplied by the nearby Caterpillar Dealer.

CATERPILLAR TRACTOR CO., PEORIA, ILLINOIS, U. S. A.

*Both Cat and Caterpillar are registered trademarks—®

Two-wheeled Ingersoll-Rand GYRO-FLO 210 compressor, powering paving breakers on U.S. No. 1 in New Jersey.
You'll find the Red Seal Trademark
CONTINENTAL MOTORS
Powerful as the Nation
AMERICA'S STANDARD

. . . EMBLEM OF **DEPENDABILITY** . . .

INDUSTRIAL GASOLINE ENGINES

Model	Cyl.	Bore	Stroke	Displ.	Bare Engine H.P.
N56	4	2¼	3½	56	14.2 @ 2200 RPM
N62	4	2⅛	3½	62	15 @ 2200 RPM
Y69	4	2½	3½	69	21.4 @ 2400 RPM
Y91	4	2⅞	3½	91	28.5 @ 2400 RPM
Y112	4	3 1/16	3½	112	32 @ 2400 RPM
F124	4	3	4⅛	124	36 @ 2400 RPM
F140	4	3 1/16	4⅛	140	42 @ 2400 RPM
F162	4	3 1/16	4⅛	162	49 @ 2400 RPM
F186	6	3	4⅛	186	60.5 @ 2400 RPM
*E201	4	3⅝	4⅛	201	59 @ 2000 RPM
F209	6	3 1/16	4⅛	209	68 @ 2400 RPM
F226	6	3 1/16	4⅛	226	73 @ 2400 RPM
F244	6	3 1/16	4⅛	244	79 @ 2400 RPM
M271	6	3⅜	4½	271	86.2 @ 2400 RPM
M290	6	3⅜	4½	290	92.2 @ 2400 RPM
M330	6	4	4½	330	104.4 @ 2400 RPM
M363	6	4	4 11/16	363	109 @ 2000 RPM
B371	6	4½	4⅝	371	110 @ 2400 RPM
B427	6	4 9/16	4½	427	127 @ 2400 RPM
G134	4	3½	4½	134	32.2 @ 2000 RPM
G157	4	3⅝	4½	157	37.7 @ 2000 RPM
H227	4	3⅝	5½	227	52 @ 1800 RPM
H243	4	3¾	5½	243	56 @ 1800 RPM
*H260	4	3¾	5½	260	60 @ 1800 RPM
T371	6	4½	4⅝	371	119 @ 2400 RPM
*J382	4	4½	6	382	74.2 @ 1400 RPM
T427	6	4 9/16	4½	427	140 @ 2400 RPM
U501	6	4½	5¼	501	160 @ 2400 RPM
R513	6	4½	5½	513	164.3 @ 2400 RPM
R572	6	4¾	5½	572	182.4 @ 2400 RPM
R602	6	4¾	5½	602	191.7 @ 2400 RPM
S749	6	5½	5½	749	217 @ 2200 RPM
S820	6	5⅝	5½	820	237 @ 2200 RPM

INDUSTRIAL DIESEL ENGINES

Model	Cyl.	Bore	Stroke	Displ.	Bare Engine H.P.
GD157	4	3½	4½	157	39 @ 2000 RPM
*ED201	4	3⅝	4½	201	45.8 @ 2000 RPM
HD243	4	3¾	5½	243	54.7 @ 2000 RPM
*HD260	4	3¾	5½	260	59.3 @ 2000 RPM
*JD382	4	4½	6	382	72.5 @ 1600 RPM
TD427	6	4 9/16	4½	427	106.5 @ 2000 RPM
RD572	6	4¾	5½	572	142.5 @ 2000 RPM
SD802	6	5 9/16	5½	802	202 @ 1800 RPM

*Available for industrial applications only.

ON THE ENGINE OF LEADING MAKES OF:

Pumps . . . Compressors . . . Shovels
Cement Mixers . . . Graders
Earth Movers . . . Ditchers . . . Rollers
Well Drillers . . . Paving Machines
Winches . . . Hoists . . . Conveyors
Industrial Trucks . . . and other Specialized Power Equipment

•

When choosing construction machinery, always remember that the leading makes of specialized equipment for every operation, from excavation on through final grading, offer the plus value of dependable Red Seal power. And Red Seal *means* plus value, because every model, no matter in what machine you find it, is engineered with the specific needs of that machine in mind. Red Seal industrial engines—14 to 237 horsepower—are backed by parts and service coast to coast. Look for the Red Seal Trademark on the engine of the equipment you choose.

• • •

6 EAST 45TH ST., NEW YORK 17, N. Y. • 8218 CEDAR SPRINGS ROAD, DALLAS 9, TEXAS • 3817 S. SANTA FE AVE., LOS ANGELES 58, CALIF. • 918 S. BOSTON ST., ROOM 1000, TULSA, OKLA. • 1252 OAKLEIGH DRIVE, EAST POINT (ATLANTA) GA.

Continental Motors Corporation
MUSKEGON, MICHIGAN

CITY BY CITY

The order is the latest in a series designed to meet the acute water shortage. Last June domestic water users were rationed on water for lawn and other irrigation purposes. In October another restriction banned all lawn sprinkling, irrigation and use of water hoses for any residential purpose.

Denver water officials claim that present supplies are sufficient to allow expansion of the metropolitan area at the current rate only until 1963. One plan to provide water—a $75-million diversion project that would bring in an additional supply from the Blue River on Colorado's western slope—was defeated by a recent State Supreme Court ruling (ENR Nov. 4, p. 28).

1,000 New Homes

New Orleans—One of New Orleans' first projects to provide housing for minorities of middle and higher income brackets will go up on some of the city's choicest undeveloped land—a 210-acre site around the new 185-acre Pontchartrain Park.

The $15-million project, planned to meet a deficiency in quality Negro housing, provides for construction of 1,000 homes in a price range from $9,800 to $25,000. Developer is Pontchartrain Park Homes, Inc.

Drainage work in the section is now under way, and construction of the first houses is to start next January.

Double Duty Development

Columbus, Ohio—A $20-million housing, hotel and business development is scheduled to get under way this month on a 140-acre site north of the Ohio State University campus.

The development—University City—will be geared to serve both the University as well as Greater Columbus.

A five-year program set up by the developers—University City, Inc.—calls for construction of some 2,000 apartments in the popular price field, a medical center, hotels, institutional and office buildings.

Aluminum Skin Building

San Francisco—Construction is under way on San Francisco's first aluminum skin building—a $500,000 structure that will serve as a combination sales office-warehouse for Reynolds Metals Co.

The warehouse portion, to be leased to Clingan & Fortier, a Reynolds distributor, will be a one-story unit providing 38,000 sq ft of space. The office section, a two-story structure, will have 7,500 sq ft of space.

CLARK— TORCON

NOW...

one strong source for industry's most

EXTENSIVE LINE OF TORQUE CONVERTERS

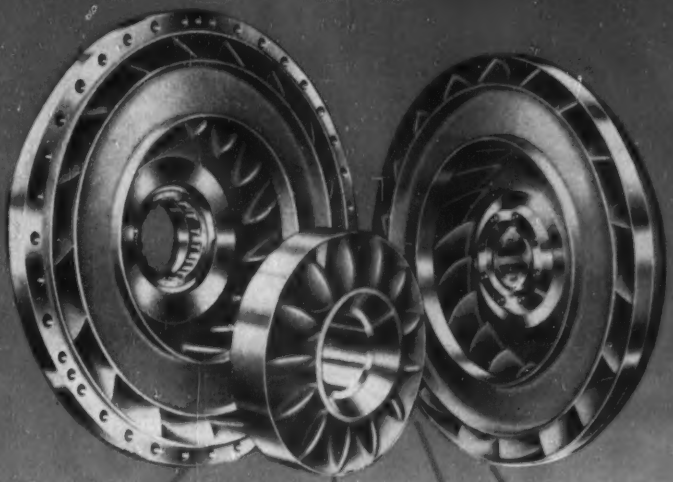

THE DESIGN and field experience of Torcon, pioneers in the development of industrial torque converters . . .

THE QUALITY manufacturing experience and versatile plant facilities of Clark Equipment Company . . .

COMBINE to provide you with industry's broadest line of industrial torque converters—11", 13", 14", 15", 16", 17", 18", 19" and 26", 30 to 600 hp. We welcome your inquiry . . . write to our Jackson, Michigan plant for information on how we can serve you.



CLARK® EQUIPMENT COMPANY

JACKSON, MICHIGAN

LOAD

Model 543 pneumatic tired Bucket Loader. Easily converted for coal or snow.

Model 82-A crawler mounted Bucket Loader. Hydraulically controlled trimmer-conveyor optional.

LOAD the cheapest way.

LOAD from stock pile, bank, or windrow.

LOAD and screen in one operation.

LOAD and strip topsoil in one operation.

LOAD with the most advanced engineering developments in the loading field.

Let us show you how a Barber-Greene Loader can reduce your costs.

54-34-BL

Barber-Greene

AURORA, ILLINOIS, U.S.A.

BG

WRITE for INFORMATION

descriptive literature . . . sound movies

cost studies . . . nearby job inspection . . . plant layouts

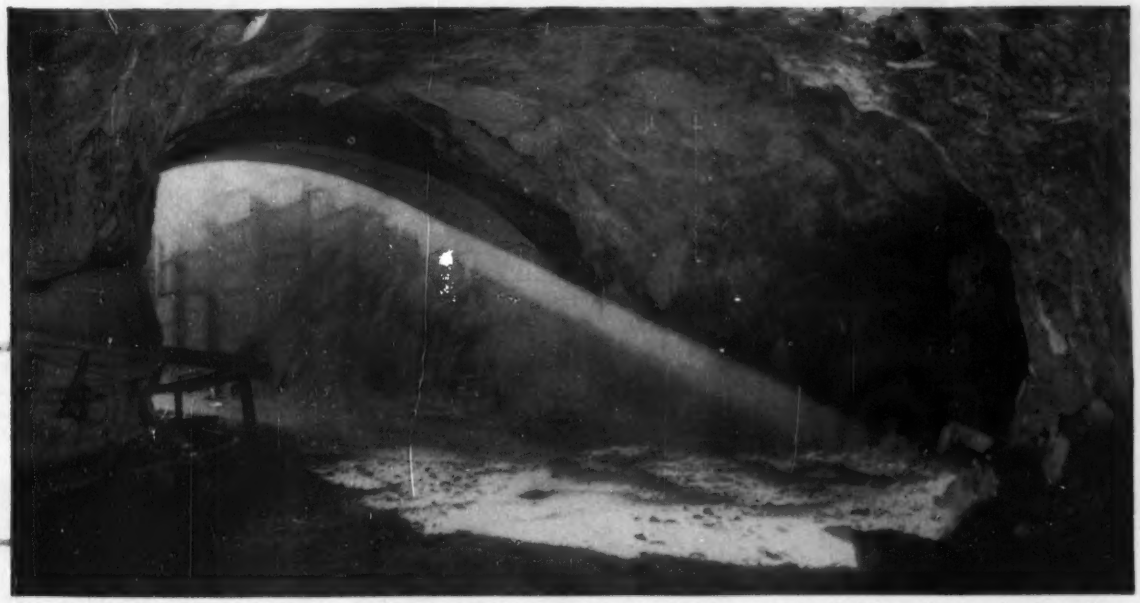

AN UNDERGROUND GARAGE in Stockholm has been cut out of solid rock to serve as a bomb shelter. Its three levels can house 600 cars and shelter 20,000 people.

Building Underground Pays in Sweden—Part I

G. Westerberg
Former Chief Director,
Swedish State Power Board
Stockholm, Sweden.

When large rooms cut out of solid rock were first used in Sweden to house manufacturing plants it was done for military reasons. Those deep rock chambers provided the best possible protection for key industries from aerial bombing attack. Now we are learning that this type of accommodation has other advantages.

It is true that the initial costs of this type of construction are somewhat higher, but if the capitalized costs for management, heating and upkeep are taken into account—provided the rock is of sound quality—the difference in cost between underground factories and factories of the conventional type above ground will be found to be small.

Fortunately for Sweden, the primary rock that is exposed or close to the surface in the more elevated provinces of the northern and central parts of the country is usually of a hard and sound quality.

The convenient accessibility of the primary rock in our country was scarcely regarded as an advantage by earlier generations; rather the reverse. In the meantime, however, people have gradually been learning the technique involved in the removal of rock, as several ore mines have been worked in Sweden for centuries. All improvements introduced in the technique of rock blasting have at once met with keen and widespread interest for the new methods or equipment.

Developments in this respect have advanced rapidly during the past few decades, and our mountain districts have been extensively exploited for many purposes, chiefly owing to the comparatively cheap cost at which rock can now be handled.

In the circumstances, it now appears probable that we have every reason to look upon our primary rock as a valuable asset.

Modern power plants are frequently planned for installation underground. In such work the costs for tunneling usually represent an important item. In the modern technique of tunneling, advantage is taken of the fact that the working cycle is repeated over and over again and thus bears a certain resemblance to mass production processes in a factory. The excavation costs per cubic yard may be regarded as the cost of a factory product, and where a skilled and well-trained crew is avail-

(*Continued on page 34*)

DESTROYERS OR SUBMARINES can find shelter in this rock chamber, which is 60 ft wide and 100 ft deep.

Cutting a Mountain Down to Size

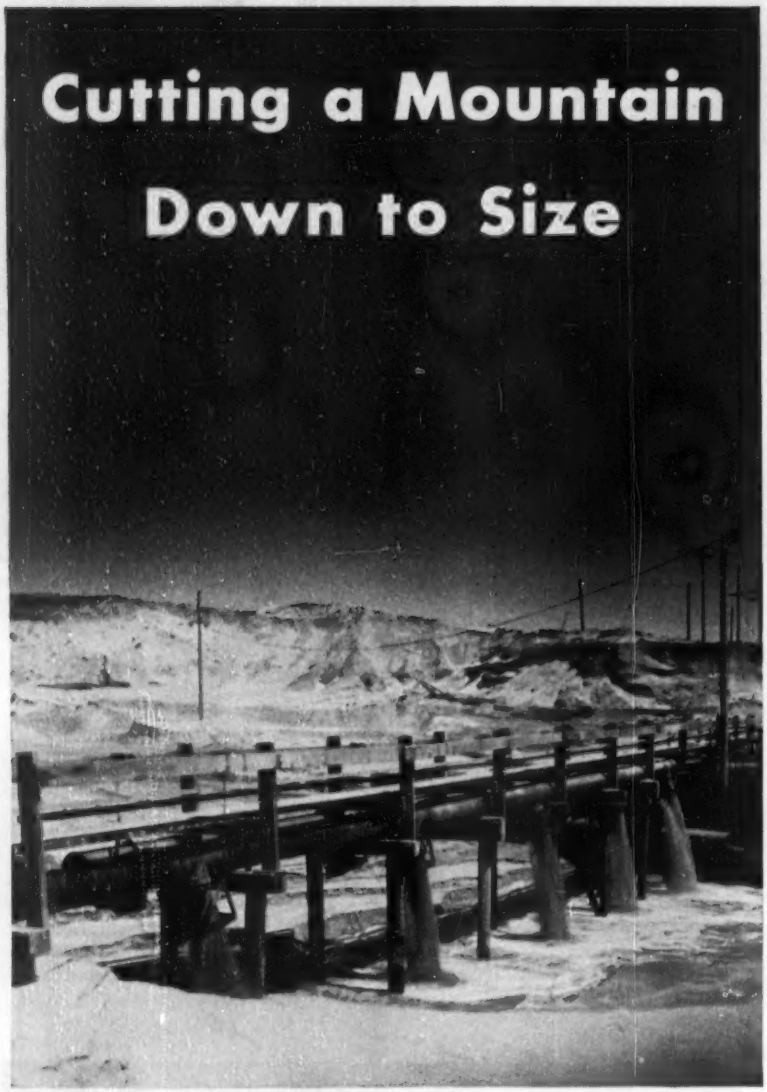

It's no trick to move mountains when you have Naylor light-weight pipe to help you. This lockseamed-spiral-welded pipe is made to order for handling sand, gravel and water because it's stronger, leaktight and extra safe for this heavy-duty service. Naylor pipe is easy to handle and install, easy to move about as the job progresses — particularly with the one-piece Naylor Wedge-Lock coupling to speed connections. Write for Bulletin No. 507 on line pipe and Bulletin No. 513 on Naylor Wedge-Lock couplings.

NAYLOR PIPE

Naylor Pipe Company • 1248 East 92nd Street, Chicago 19, Illinois

Eastern U.S. and Foreign Sales Office: 350 Madison Avenue, New York 17, New York

able it may be much cheaper in comparison with single-cycle constructional work. For this reason, where the conditions are favorable, the underground power plant is frequently found to be the correct solution both from a technical and from an economic point of view.

Underground oil-storage plants are coming very much into favor in this country. Sweden does not possess any natural oil resources of its own and consequently is obliged to purchase the whole of its supplies abroad and store sufficient quantities not only to cover immediate requirements but for some time ahead in case imports should happen to be cut off for some reason or other. Although the U.S.A. is very rich in natural oil resources, the method of oil storage in bomb-protected premises may also be found of interest in that country.

Experience with underground storage of gasoline indicates that savings due to the practical elimination of evaporation will soon offset the added cost of storing that type of fuel on water in rock chambers.

Another use of rockrooms in Sweden that may be of interest in other countries is for underground garages, which can also be used as shelter for the population in the event of war. Such shelters are under construction in many Swedish towns, the largest being one built deep under Stockholm. It is essentially a tunnel 1,000 ft long, 57 ft wide and 37 ft high, with three levels and with access to streets at nine points.

This underground chamber required blasting out 130,000 cu yd of rock. It could accommodate 20,000 people. For peace-time use, it will accommodate 600 automobiles.

Still another use of rock chambers, a purely military one, is as a bomb-proof shelter for submarines and destroyers. Obviously, this use is only possible in those countries which have high rock masses adjoining deep arms of the sea.

Although the experiences gained from installations in one locality or one country cannot be directly applied in other countries, an exchange of information about this underground construction probably would be advantageous. To that end, three engineers who have been closely associated with that work have been asked to prepare more detailed statements about some of the more important developments. The first of these, which relates to large rockrooms in general, follows on page 37. The others will be published in subsequent issues. They describe two large underground power plants and some of the important underground oil-storage installations.

111 LORAINS ON 1 JOB...

THE NEW YORK THRUWAY

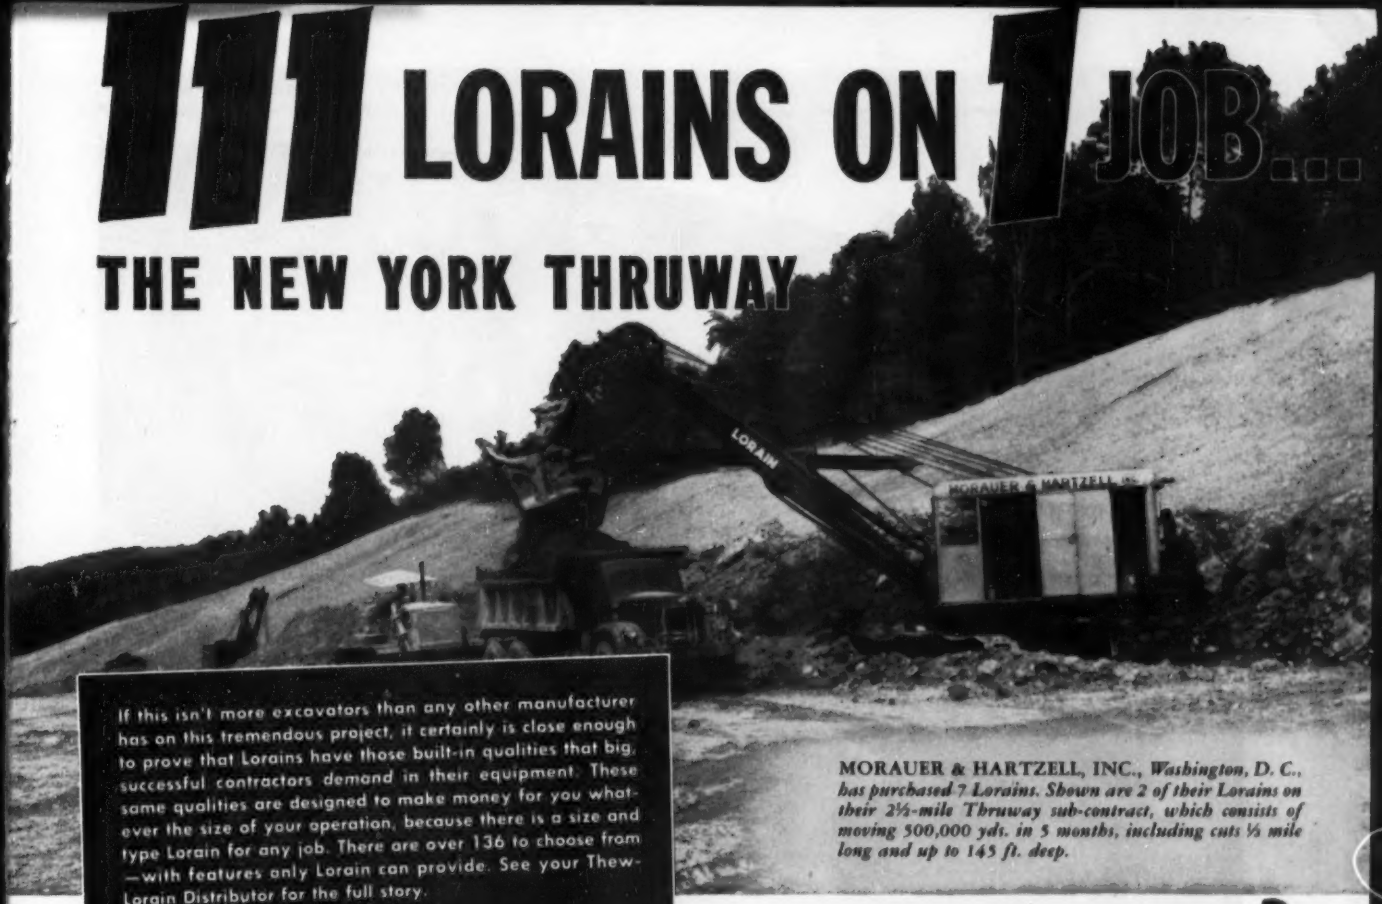

If this isn't more excavators than any other manufacturer has on this tremendous project, it certainly is close enough to prove that Lorains have those built-in qualities that big, successful contractors demand in their equipment. These same qualities are designed to make money for you whatever the size of your operation, because there is a size and type Lorain for any job. There are over 136 to choose from —with features only Lorain can provide. See your Thew-Lorain Distributor for the full story.

MORAUER & HARTZELL, INC., *Washington, D. C., has purchased 7 Lorains. Shown are 2 of their Lorains on their 2½-mile Thruway sub-contract, which consists of moving 500,000 yds. in 5 months, including cuts ½ mile long and up to 145 ft. deep.*

SAVIN CONSTRUCTION CO., *East Hartford, Conn., has purchased 46 Lorains. Their $27 million Thruway contract covers 27 miles. At left, is a 2-yd. Lorain 820-K "Special," equipped with a 26-ft. shovel boom, loading borrow at the rate of 200 yds. per hour. Right, another 820-K "Special," with clamshell bucket on a 70-ft. boom, feeds a batching plant.*

A. J. ORLANDO CONTRACTING CO., *Whitestone, L. I., N. Y., has a sub-contract for grading and is using these two Lorains to move a total of 6400 yds. every 8 to 10 hours. At left, is a 2-yd. 820-K "Special" which has moved as much as 370 yds. per hour in a mixture of dirt and rock. At right, another 2-yd. Lorain 820-K works nearby.*

NEW YORK THRUWAY FACTS — 427 miles long—will cost $555 million—over 80 million cu. yds. of excavation and fill—525 bridge structures—9 million barrels of cement, 4 million yards of stone, 2 million yards of sand needed for concrete.

THE THEW SHOVEL CO., LORAIN, OHIO

THEW LORAIN®

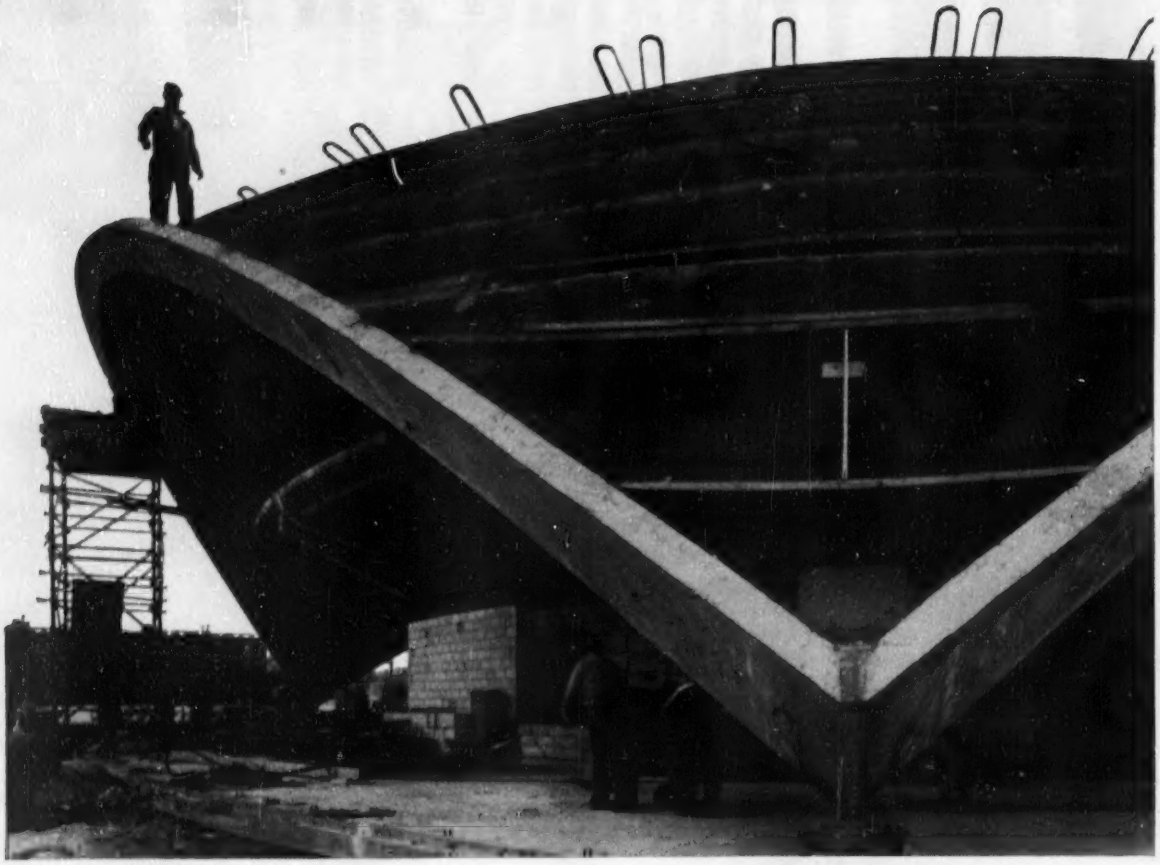

Spherical Triangle Roofs M.I.T. Auditoriums

Under construction at Massachusetts Institute of Technology is a striking $1.5 million building containing two auditoriums. One auditorium, seating 1200, is at grade level, the second, seating 200, is in the basement.

An unusual reinforced concrete dome roofs the building. The dome, actually an equilateral spherical triangle, eliminates the need for columns in the large auditorium, and also will assure excellent acoustical properties. Maximum clear height of the roof above the floor is 45 ft. Glass walls will extend from the lobby floor to the edge of the dome.

Reinforcing steel, supplied by Bethlehem, was installed on the entire dome form before any concrete was placed. Concrete was cast in three sections of about 95 cu yd apiece.

Bethlehem Reinforcing Bars, used on so many important concreting jobs from coast to coast, are made exclusively from new-billet steel, of known analysis. They come in size ranges from number 3 to 11, with deformations meeting ASTM Spec. A-305. They are cut to length and bent in our shops, and reach you bundled and tagged, with bar lists included, ready for instant placing.

Architects: Eero Saarinen and Associates, Bloomfield Hills, Mich. *Associates:* Anderson and Beckwith, Boston, Mass. *General Contractor:* George A. Fuller Co., Boston, Mass. *Consulting Structural Engineers:* Ammann and Whitney, New York City.

11 BETHLEHEM BAR FABRICATING SHOPS

Boston, New York, Philadelphia, Baltimore, Buffalo, Chicago, Johnstown, Pa., Los Angeles, San Francisco, Seattle, St. Paul

BETHLEHEM STEEL COMPANY
BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corp. *Export Distributor:* Bethlehem Steel Export Corp.

BETHLEHEM STEEL

Bethlehem **REINFORCING BARS**

Industria International photo

THIS TRAFFIC TUNNEL serves the Bofors underground plant in Sweden. It was left unlined but is painted white.

Underground Room Construction—Part II

To assure adequate protection and long spans, practice suggests minimum overburden of 12 meters. Closely spaced drill holes and light charges necessary for smooth breaks

Sten G. A. Bergman
Chief Engineer, Research Bureau
Royal Fortification Administration
Stockholm, Sweden

Rockroom installations built in Sweden prior to 1940 were generally of minor size with spans of about 4 to 8 meters. The design of those structures was based on experience gained from construction of railroad tunnels and similar rockblasting enterprises. As a norm to determine the safety of roof construction it was considered sound practice that the thickness of the overburden should not be less than the span of the room. The rock surfaces of the rooms often remained undressed.

However, the technical development of fortifications to resist bombs of greater demolition capacities and the successively increasing dimensions of underground premises, required increased strength of overhead rockroom construction. In studies of how to meet these greater requirements it was determined through tests that by increasing the thickness of the overburden and using an inside lining of thin reinforced-concrete arches, satisfactory safety could be obtained even against very large bombs.

• More cover provided—Successive experiences with completed installations demonstrated also that by increasing the thickness of the overburden other construction advantages could be obtained. The upper part of the rock is usually weathered and fissured, but the quality improves generally with increasing depth. Therefore, it was found that, in installations with thick overburden, the better quality of the rock tends to lessen the amount of reinforcement that otherwise would be necessary as well as to reduce the danger of rock breaking away and falling down in the future.

These motives, in conjunction with the desire to increase the spans, rapidly led to rock overburdens of 12 to 15 meters in thickness. These thicknesses are presently considered to be desired minimum average values. However, at larger installations, efforts are always made to increase the thickness of the overburden as far as can be consistent with economy and function.

The value of the added protection obtained through the increased overburden usually compensates for the comparatively small additional costs caused by lowering the elevation of the installation a few meters. Tunnel spans of 15 to 20 meters are becoming increasingly common in Swedish rock installations, and rockrooms spanning close to 30 meters are presently under construction.

Various types of installations are now being built in rock, as was noted in the preceding article. Most of the earlier installations were built for military purposes. Examples are shelters in connection with battle stations and anti-aircraft control, protection of supplies and workshops, gasoline and oil depots, hangars and ship-tunnels. But the Civil Defense and the National Economical Defense also have built and continue in increased tempo to build shelters as well as storage premises. Some important war industries have workshops permanently located in rock, where production now continues during peace-time periods.

(*Continued on page 38*)

Cost of Rockrooms in Sweden

Total volume of installation (cubic meters)	Cost of blasting crowns per cu m. 1946-49	1950-51	Inside construction (Reinforced concrete) Crowns per cu. m. 1946-49	1950-51
10,000	47	40	63	71
20,000	40	33	58	66
40,000	34	28	51	59

for Improved
QUALITY

IN ANY
Concrete or Concrete Product
Specify ... Use
AD-AIRE
Air Entraining Agent
MEETS A.S.T.M. SPECIFICATIONS

INCREASES WORKABILITY for a better, more economical concrete... provides better flowability...reduces requests for added water...there is less bleeding, less segregation... mixing time is reduced and there is less wear on the mixing machine.

In the final product Ad-Aire provides a denser concrete that stands up better under freezing and thawing to resist scaling, spalling and cracking. It's a better concrete with finer texture and decreased permeability to water.

Usually One Ounce of Ad-Aire per sack of cement is needed. The cost is low.

Prove It To Yourself! Send Coupon For FREE 1-GALLON SAMPLE of AD-AIRE

Carter-Waters Corp.
Dept. E-6, 2440 Pennway
Kansas City 8, Missouri

Please forward Free Gallon Trial Sample with complete information on AD-AIRE.

Name_____

Firm_____

Address_____

City_____ Zone____ State____

WORKSHOPS in the Bofors installation are concrete-lined rock chambers. Ample light and air-conditioning provide ideal working conditions.

SMOOTH TUNNEL ROOF obtained by careful rock excavation methods recently adopted. Spacing of the drill holes is about 2 ft.

The total investment to date for rockroom installation in Sweden probably amounts to nearly one billion crowns ($200 million).

• **Psychological factors**—During the past 10 years the several Swedish industries that have plants located in rock chambers have gained experience that will be of value in the future. Comfortable working conditions are very important. A rather pronounced—and understandable—aversion exists in some people against working "where they can see neither sun nor moon."

Rooms should be painted in light, cheerful colors. Ventilation and illumination problems must be carefully considered. All requirements, which are needed to give proper working areas, can usually be carried out without technical difficulties.

Access to well-planned and spacious meeting rooms also is of utmost importance. An advantageous arrangement would be to combine underground working quarters with recreation rooms and dining halls located on the ground surface, thus enabling those employed to spend some of their leisure time in the open air at meal periods.

Investigations carried out at various industrial plants have proved that work in well planned rockrooms in no particular way is detrimental to the health, but that nevertheless there are some individuals who insist that such work causes depression and tiredness. These reactions, however, generally can be traced to psychological factors.

At underground industrial plants where a matter-of-fact educational program is practiced, where proper social welfare is carried on and a high hygienic standard is maintained, no particular problems occur. Information received from some of the Swedish

installations indicates that employes suffering from asthma or rheumatism actually benefit by the prevailing constant climatic conditions.

• **Rock costs reduced**—Modern highly mechanized blasting techniques have made rockblasting comparatively inexpensive. Among factors which have reduced the cost of rock excavation, attention is called to the use of hard metal rockdrills, improved drilling machines and short-delay blasting.

The cost of construction work inside the rockrooms, on the other hand, has increased, as is shown in the accompanying table.

• **Improved blasting methods sought**—In spite of considerable experience derived from construction of a great many rock installations, many problems remain unsolved whose solution probably would still further reduce the costs of new installations. Amongst those problems, special attention is called to the investigation of methods to produce a more accurate blasting of the rockroom contours, particularly the roof.

Tests have proved that by spacing the contour drill holes close together, and that by using blasting of low intensity in these holes, very smooth and crack-free surfaces can be obtained in gneiss and granite.

It is still impossible to define the optimum technical-economical procedure, but to an ever increasing extent the Swedish blasting specifications suggest a careful charging of explosives in the contour holes. Continued experimentation probably will be concentrated on the development of some low brisance explosive agent to be used at the contour holes, whose effect should in the least possible manner disturb the remaining rock. The further development of such blasting methods is also a link in the efforts to facilitate construction of rockrooms with greater spans.

A certain amount of unfortunate exploitation has occurred in Sweden. Favorably located, good-quality rock bodies have already been used for underground plants, but too often for poorly planned and inadequate installations of small spans. As a result, it is not unusual that new installations being made today must be located in rather bad quality rock, necessitating a certain amount of additional reinforcement. However, even under these adverse conditions, the cost for the reinforced construction can be kept reasonably low, and good installations can be obtained as a result of presently used drilling and blasting methods, which to a noticeable degree reduce disturbances of the rock outside the intended cut.

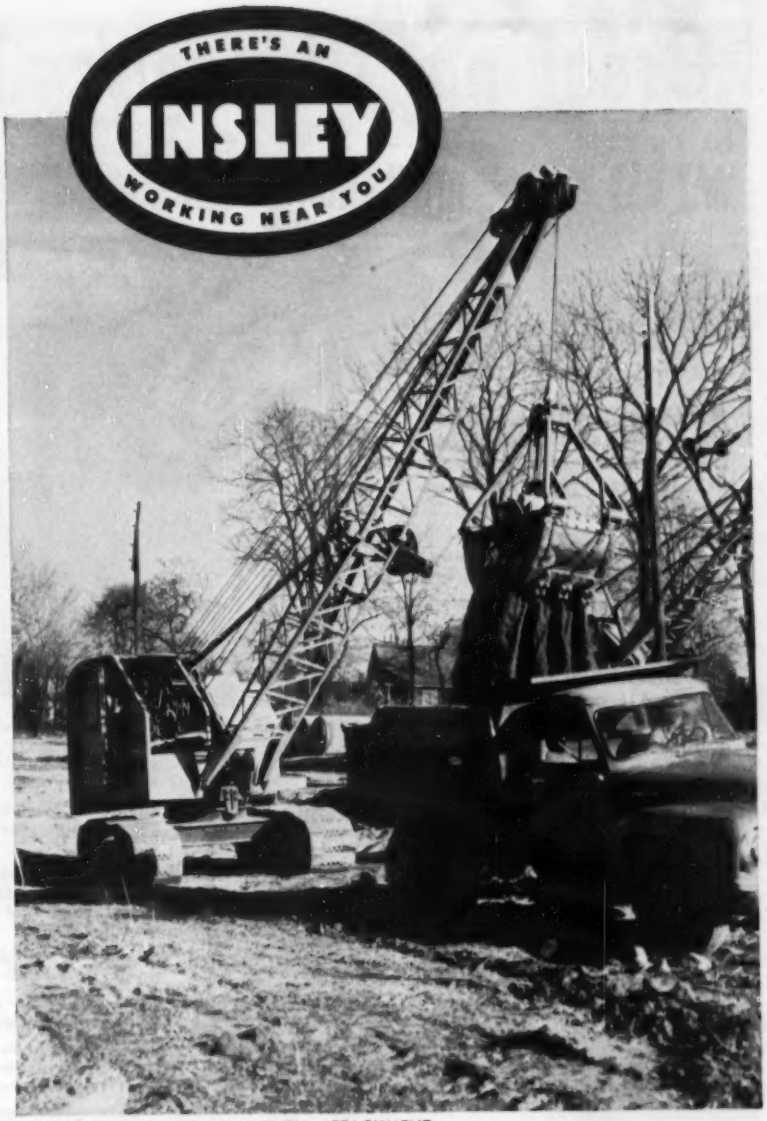

INSLEY TYPE K WITH CLAMSHELL ATTACHMENT

The Insley Line includes excavators and cranes, 5 to 30 ton capacity—rubber or crawler mounted —gasoline, diesel or electric power. For full information on the Insley Line write the Insley Manufacturing Corporation, Indianapolis 6, Indiana.

INSLEY MANUFACTURING CORPORATION, INDIANAPOLIS

wholly owned subsidiary | **THE MAXI CORPORATION • LOS ANGELES**

Breaking Chicago's Bottleneck with a BLAW-KNOX BITUMINOUS PAVER ON WHEELS!

● Chicago and the Cook County Highway Department had a date! Dec. 1st had to see the completion of the last section of the North Side Outer Drive. Standard Paving Co. of Chicago had the contract. The job was two lanes, 48-ft. wide and over half a mile long. After seeing the Blaw-Knox Paver on a few hours' work they bought the machine and finished the job in 13 days in spite of several days of bad weather.

The pavement was 3 courses of I-11 — two base courses 1½" thick and a finish course 1½" thick. All courses were 12 ft. wide. The machine operated at 24 ft. a minute and handled 15 ton trucks. Output was materially reduced because of the long haul (12 miles) from the plant, but in spite of weather and haul the entire job including lighting will be completed long before the penalty date.

You can make money by paving on wheels!

BLAW-KNOX COMPANY
FOOTE CONSTRUCTION EQUIPMENT DIVISION
1922 STATE STREET
NUNDA, NEW YORK

- ✓ Long wheel base and wheel steering assure greater accuracy and smoother course.
- ✓ Eliminates the 500 to 600 parts characteristic of crawlers.
- ✓ Tires absorb vibration, reduce chatter in screed and reduce wear and tear on machine.
- ✓ Handles boxcar trucks on grades with ease.
- ✓ Dual controls — operate machine from either side.
- ✓ Compacts to uniform density and automatically measures and levels.
- ✓ Leveling principle equalizes ordinary subgrade irregularities.
- ✓ Simple, easy crown adjustment.
- ✓ Conversion for increased width is easy and fast.
- ✓ Works close to curb.
- ✓ A sturdy frame you won't have to rebuild.
- ✓ The only floating screed paver with positive traction at *all* times.

On wheels it will pave for less

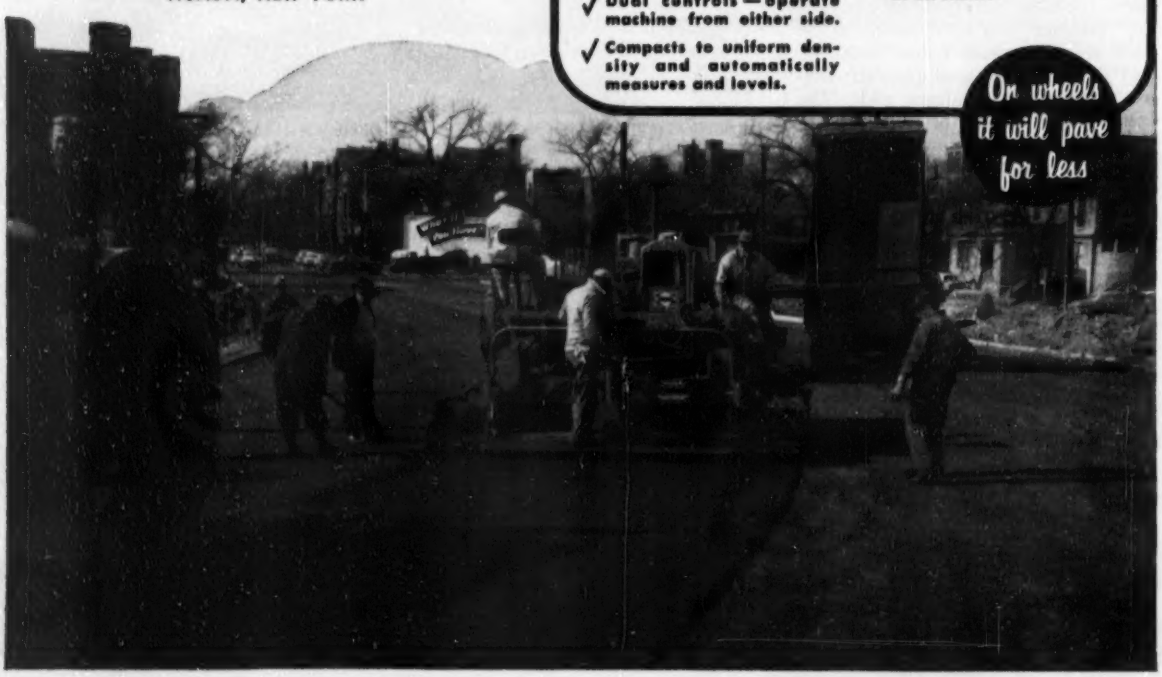

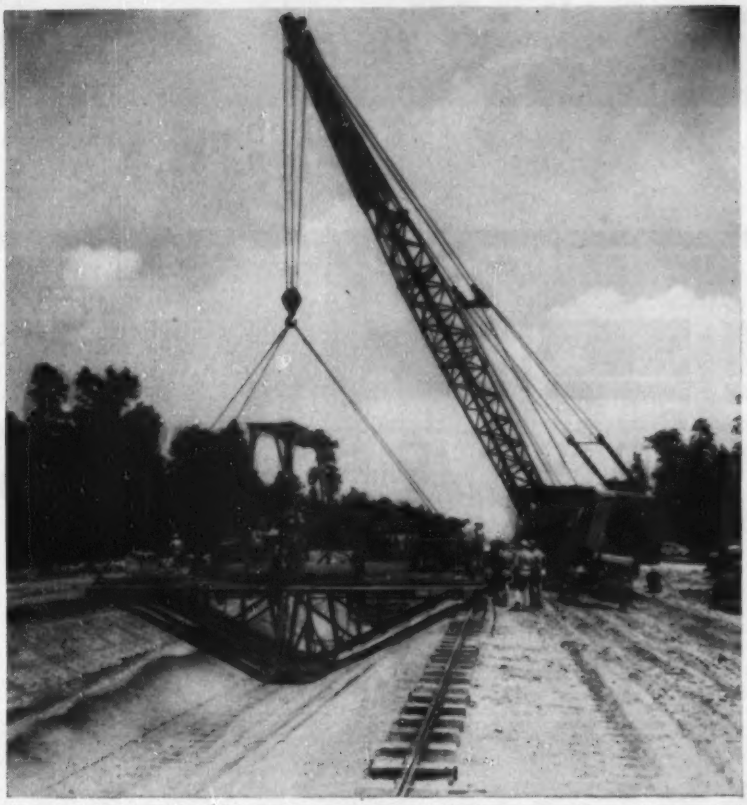

WIRE UNREELING RIG is lowered onto tracks by crane. It is self-propelled.

Rig Unreels Wire Mesh Ahead of Canal Paver

A new entry joined the usual parade of construction equipment on the recently completed water supply canal, linking reservoir and treatment plant for Houston, Tex. Into the dozer-dragline-trimmer-paver-finisher sequence went a machine devised by contractors Brown and Root, Inc., to unreel steel welded wire fabric reinforcing for the canal's concrete lining.

Production-line technique finished the 13-mile canal, with its 2,250,000 million sq ft of 4-in. pavement, months ahead of schedule under a $3.2 million contract.

• First came the heavy duty bulldozer to cut down slopes of an existing unlined canal roughly to new grade.

• Second came the dragline to clean loose dirt from the 32-ft wide cut.

• Then, rails went down on either side of the cut to carry the familiar canal-lining machinery.

• Third pass at the canal was made by a rail-riding trimming machine, its blades set to exact grade and shape of the cut. The 6-ft wide flat bottom and approximately 2 to 1 side slopes of the trapazoidal section were shaved smooth.

• Fourth machine to roll down the line was Brown and Root's newly devised reel carriage from which the reinforcing fabric was placed. As the wire mesh unreeled in strips (12 gage wire at 4x4 in. spacing) it was overlapped for continuity and tied together by men following the self-propelled unreeling rig.

• Next came the big slip-form machine, pouring up to 1,570 linear feet of concrete canal pavement in a day. Moving along the rails under its own power, this machine took concrete from a mixer moving alongside, distributed it to downspouts across the canal's width and poured it to uniform thickness on bottom and sides of the canal. Men riding a platform just ahead of the down-spouts hooked the reinforcing fabric and pulled it up into proper position in the poured pavement. Some 400 tons of steel went into the concrete as reinforcing.

Final machine to make the run was a finishing unit which smoothed the canal lining to insure its capacity to carry 150 mgd of needed water for Houston.

General features of this water supply canal and the overall water supply and treatment project for Houston were described in ENR Sept. 10, 1953, p. 51.

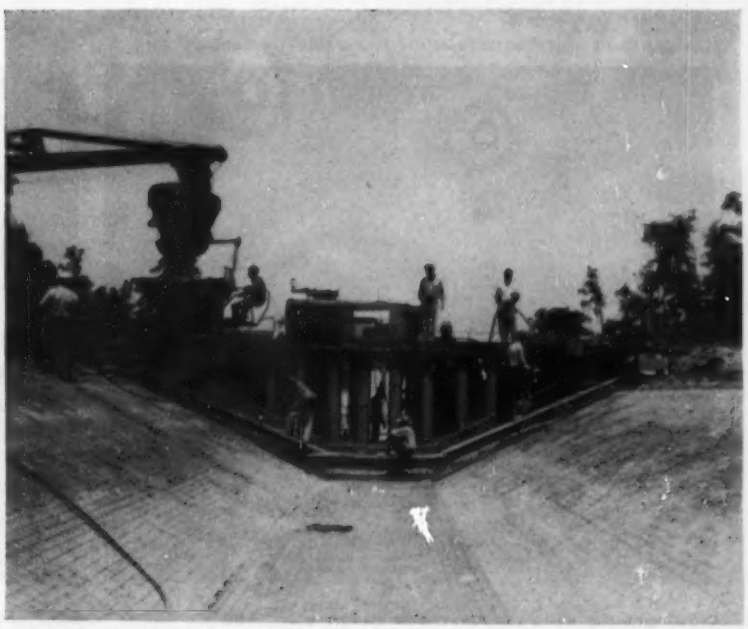

CANAL PAVING MACHINE used had been designed and built by Gunnert and Zimmerman, Stockton, Calif., canal specialists.

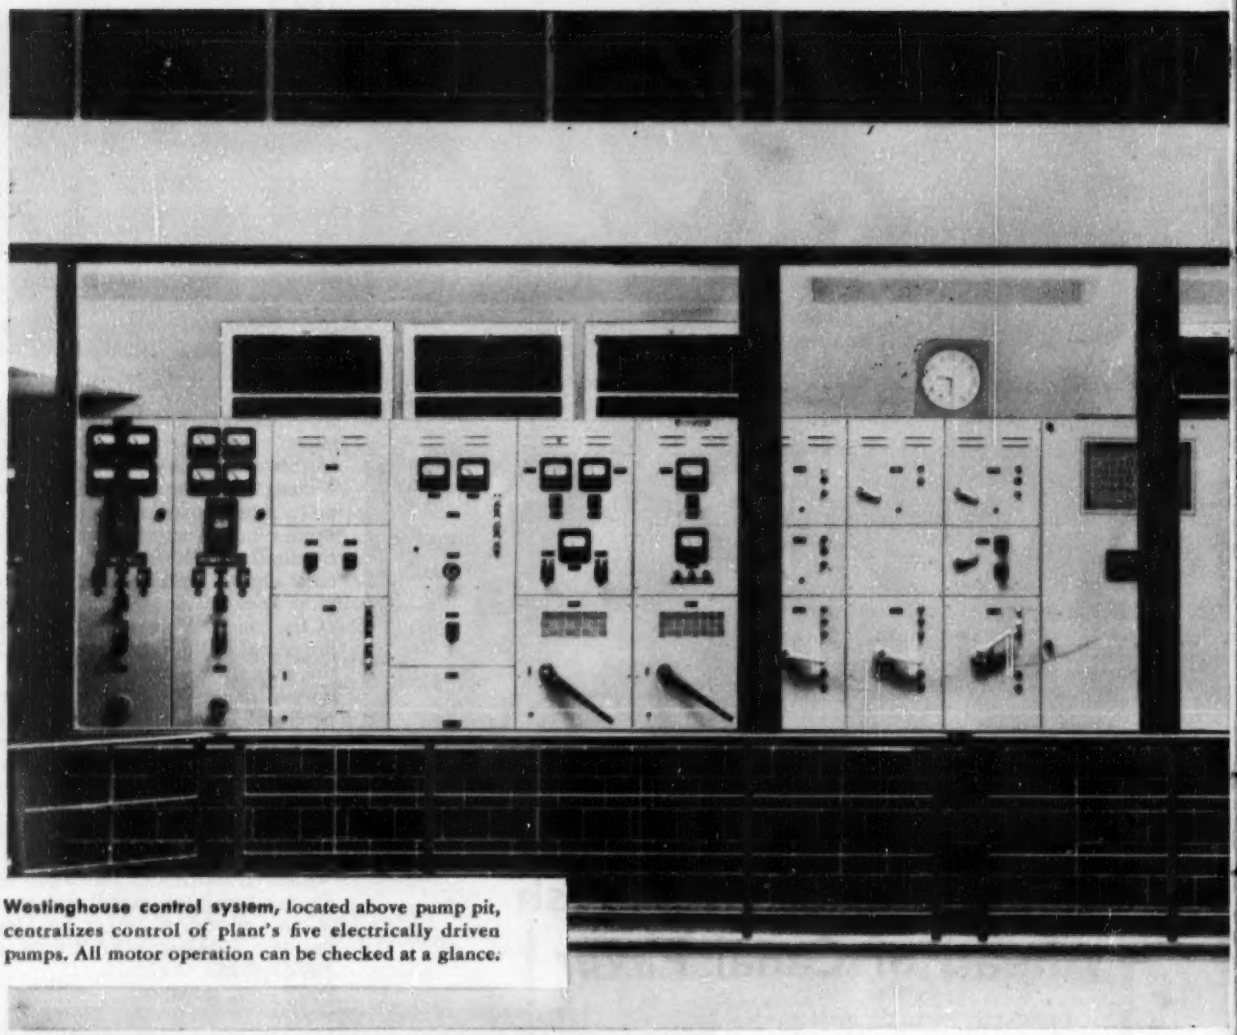

Westinghouse control system, located above pump pit, centralizes control of plant's five electrically driven pumps. All motor operation can be checked at a glance.

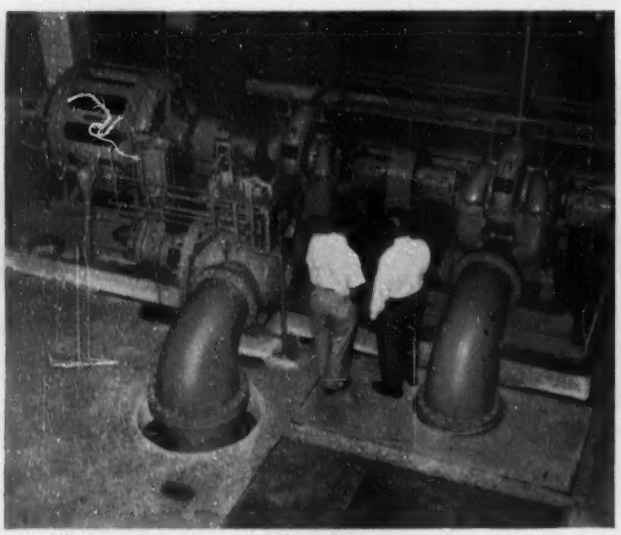

Westinghouse synchronous motor (2400 volts, 900 horsepower) operates one of the three 15-mgd electrically driven pumps at the three-million-dollar plant.

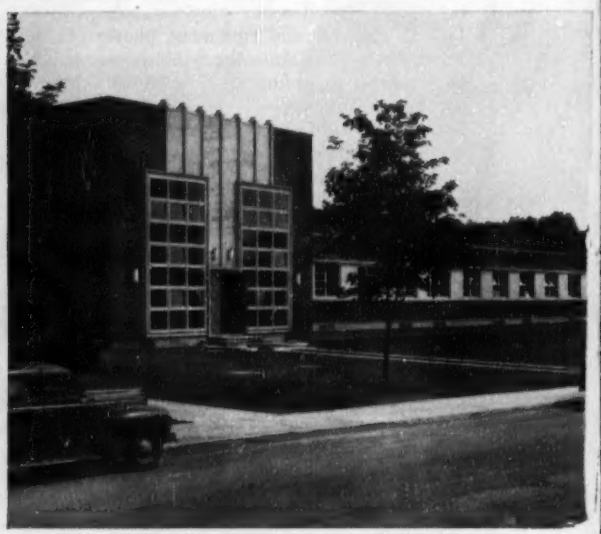

New 20-mgd filtration plant, Allentown, Pa. Consulting Engrs., Morris Knowles, Inc.; Electrical Contractor, Dravo Company—both of Pittsburgh, Pennsylvania.

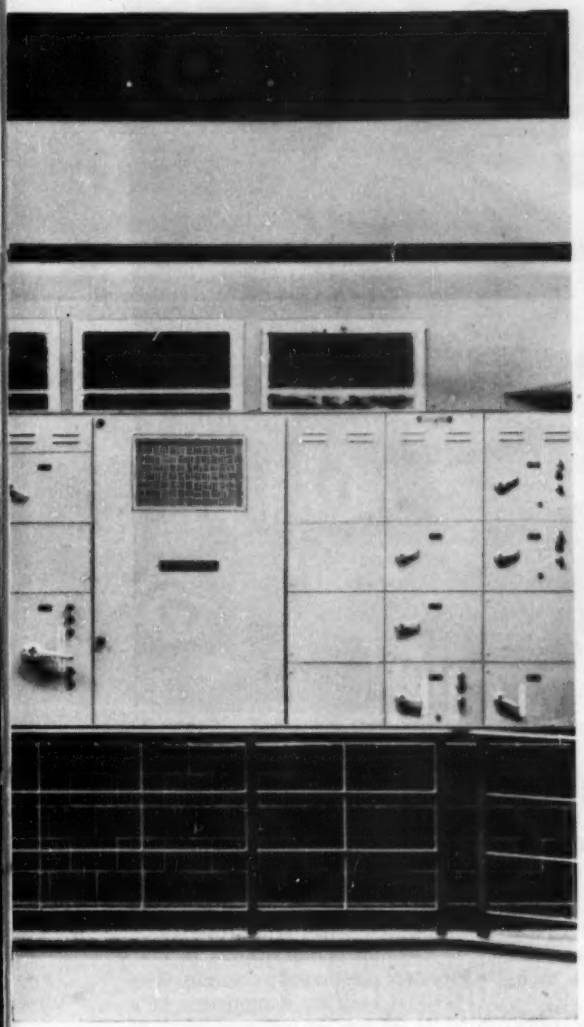

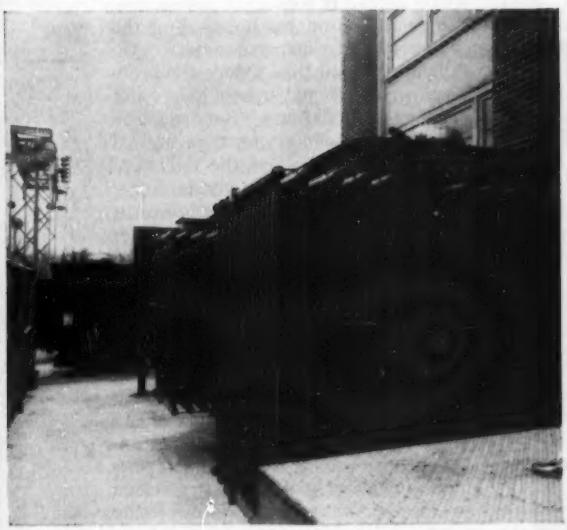

Westinghouse power transformers (12,000 to 2400 volts) furnish the filtration plant's entire power supply. Left background: part of Westinghouse outdoor substation.

Allentown's outstanding filter plant has a centralized pump control system

The new 20-mgd filtration plant at Allentown, Pa., has stimulated considerable interest throughout the waterworks field. This outstanding installation doubles the available water supply and is expected to meet the city's needs for the next 30 years.

From planning stages through installation of equipment, Westinghouse teams worked closely with the consulting engineers. They helped design the electrical system. They matched it with coordinated products that met the plant's rigid requirements for attractiveness, efficiency and simplified maintenance.

How well these were carried out is reflected in the Westinghouse pump control system. Its many switching and control units blend in height and appearance due to their modular construction. Efficiency is assured since the system centralized in one location operation of the plant's pumps. And maintenance is simplified. By being mounted in one line, all units are easily accessible from the front of the board.

This is another example of Westinghouse engineering and product services—ranging from electrical system planning help through design and application of equipment to meet any power problem . . . in any industry.

One call to your nearby Westinghouse Office brings this complete service to you, your engineers and contractors. Westinghouse Electric Corporation, 3 Gateway Center, P. O. Box 868, Pittsburgh 30, Pa. J-94021

YOU CAN BE SURE... IF IT'S

Westinghouse

MID-BLOCK LOCATION forces unusual construction procedures in order to provide least interference for service traffic.

Wall-less Garage Built From Top Down

Precast, prestressed concrete columns resist seismic and vertical loads in Salt Lake City structure

There were unusual site requirements that complicated design and construction of a 542-car parking garage now nearing completion for the ZCMI department store in Salt Lake City: The garage is located in the center of one of Salt Lake's huge downtown city blocks—an area that had to be kept usable during and after construction for truck access to the store; part of the area was occupied by vital service buildings that also had to remain in operation.

As a result, normal procedures were modified to include:

- Precast concrete columns, 52 ft long, that were prestressed in order to reduce weight and to resist horizontal forces.
- A slab casting sequence that started at the top floor, after which the steel and timber forms were winched down for positioning on the four remaining floors.

The columns were designed to span the 20 ft from ground level to the first floor with no walls. The upper floors are also without walls, since the columns are strong enough to resist horizontal forces, and in addition, the needs of a parking building do not necessarily include walls.

• Big one—The garage is said to be the largest parking garage in the U. S. that permits customers to park their own cars.

A two-lane approach ramp takes parkers directly to first-floor level, which because of need for continued truck access to the store, is 20 ft above ground level. Floors are 8 ft apart, each floor divided longitudinally with the east half being 4 ft higher than the west half to permit use of ramps from half-level to half-level.

The up-ramp group circles the southern $\frac{3}{4}$ths of the building and the down-ramp group the northern $\frac{3}{4}$ths. Traffic flow is arranged in a counterclockwise pattern to minimize interference and confusion.

Customers can walk from their cars directly to the ZCMI (Zion's Cooperative Mercantile Institute) store from three of the five garage levels, since there are two floors in the garage for each floor in the store. Thus, the first, third and fifth garage levels correspond with the second, third and fourth floors in the store.

Elevator service is available in the store or by a new elevator system that is being constructed in connection with the garage.

The entrance ramp is panel-heated against icing. Ramps between adjacent floors in the garage are covered with an asphalt-impregnated burlap surfacing for better skid resistance.

• Precast, prestressed columns—The 115x300-ft building is supported by a total of 40 precast columns, most of which are 52 ft high.

Primary reason for prestressing the columns was to increase the strength-weight ratio and thus reduce the problems involved in transporting and placing the columns. But the columns had to have greater than normal strength since they are the only seismic resisting elements in the building.

The top 32 ft of the columns is 4 ft wide and 10 in. thick and includes 10 prestressing cable assemblies having 7 wires of 0.25-in. dia each.

The bottom 20 ft of the columns—up to first floor level—is heavier, due to the greater unsupported length. This portion is 4 ft wide by 18 in. thick and includes an additional 10 prestressing cables.

All prestressing tendons are anchored with pressed-on heads in a one-inch-thick base plate that is recessed to receive the button heads of the wires. All tendons were pulled from the upper end after the 5,000-psi concrete reached full strength.

At each floor level there is a pro-

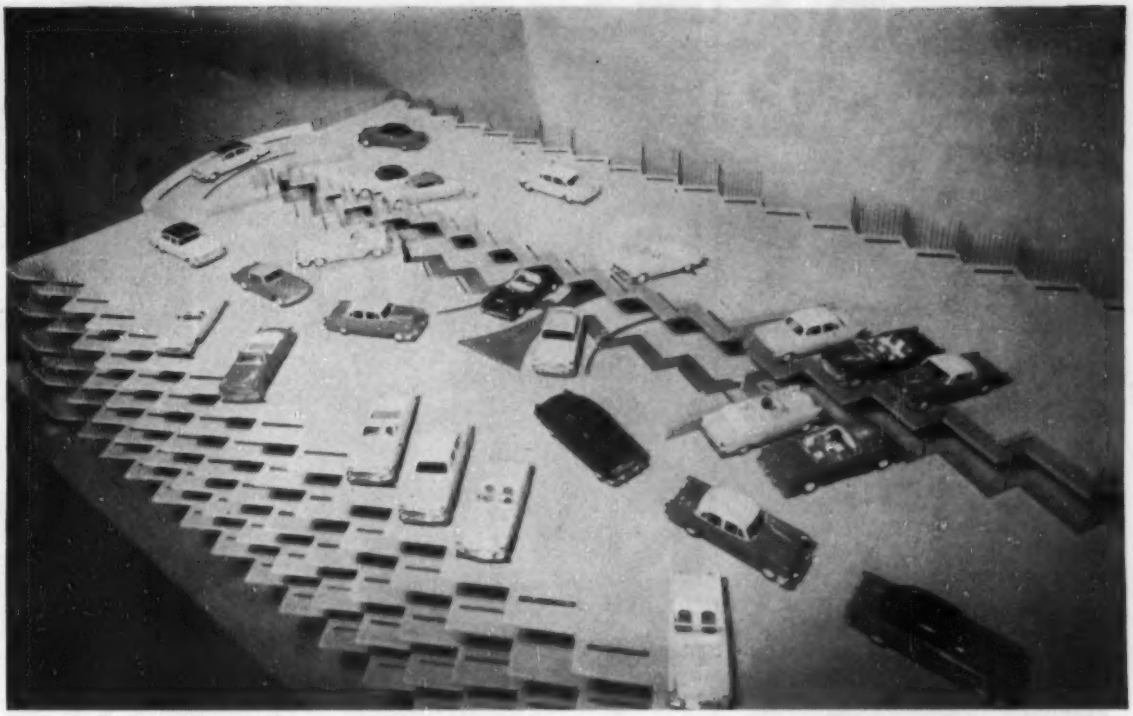

SELF-PARKING made easy. Floors are split longitudinally with sets of connecting ramps to separate incoming and outgoing traffic.

jection to provide additional slab support. The slab reinforcing-bar pattern is continuous through the columns. Dowels were cast into the columns and later welded to the floor-slab steel.

Eleven of the 40 columns had to be placed through holes in the roofs of existing buildings, on previously cast footings. The underlying material is an almost perfectly graded alluvial rock that was considered good for 6,500 psi dead load and for 10,000 psi dead plus live load including earthquake load.

Some of the footings in the existing buildings had to be substantially above ground level. The footings were designed so that, together with the superimposed columns, the same stiffness would result as for an ordinary column-footing assembly. Uniform stiffness is important in assuring that the columns are subject to equal lateral load—usually assumed to be distributed in proportion to relative rigidity of vertical resisting elements.

The columns were trucked the 17 blocks from the contractor's casting yard to the job site, on low-bed trailers with special police escort.

Two 20-ton cranes working through a spreader beam were used to lift and position the 15-ton columns at the job site. A steel plate cast in the top of the column made provision for a two-point lift.

As soon as the columns were in place they were braced with timber and steel-rod frames. These frames aided in plumbing the columns (although the workmanship was so good that the most any one column was out of plumb was 1¼-in.). They also served to assure stability of the building during the casting of the upper two floors.

• **Forms move down**—Floor slab casting started at 5th floor level. Slabs were cast in four-column bays with the panels about 55 ft square. Adjacent panels were separated by an opening of about 3 ft that was concreted after form stripping.

Concrete was pumped into place, mixing being done at ground level. After the concrete had reached adequate strength, the forms were winched down to the next floor level. Eight manually operated winches—two on each column—lowered the forms. Pull on each winch was about 75 lb. Total time to lower a floor panel and position it for the subsequent pour

(*Continued on page 46*)

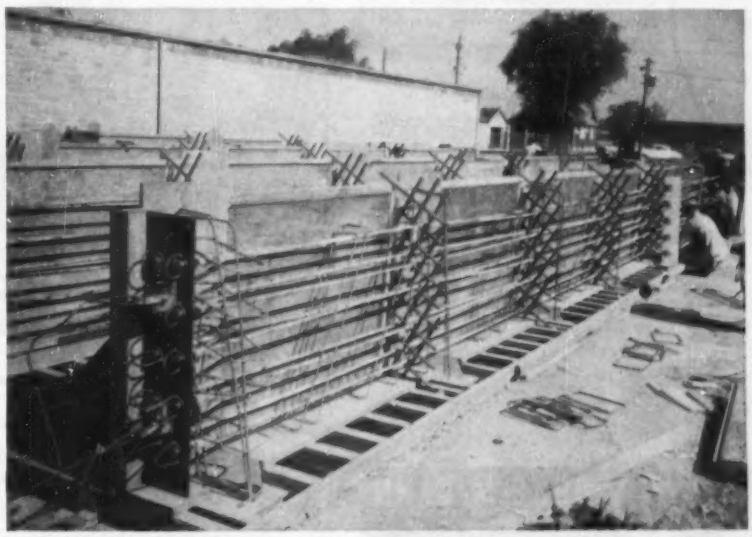

PRESTRESSED COLUMNS are 52 ft long, include 10 prestressing cables for full height and 10 more up to first floor level.

Sound powered
TELEPHONES
NEED NO CURRENT

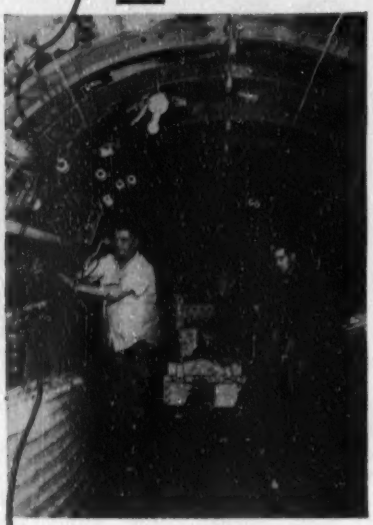

For temporary use on construction work, these instruments move with the job as it progresses. Also for permanent installation on industrial projects. Indoor or outdoor models in selective or common ringing and semi-selective or common talking.

Positive communication is assured at all times because no batteries or current of any kind are required. Cost of upkeep is negligible.

Photo shows Model "K" Phone in use on Niagara River project. General Contractors, Herbert F. Darling, Williamsville, N. Y.

WRITE FOR ILLUSTRATED CATALOG

HOSE-McCANN TELEPHONE CO., INC.
761 THIRD AVENUE
BROOKLYN 32, N. Y.

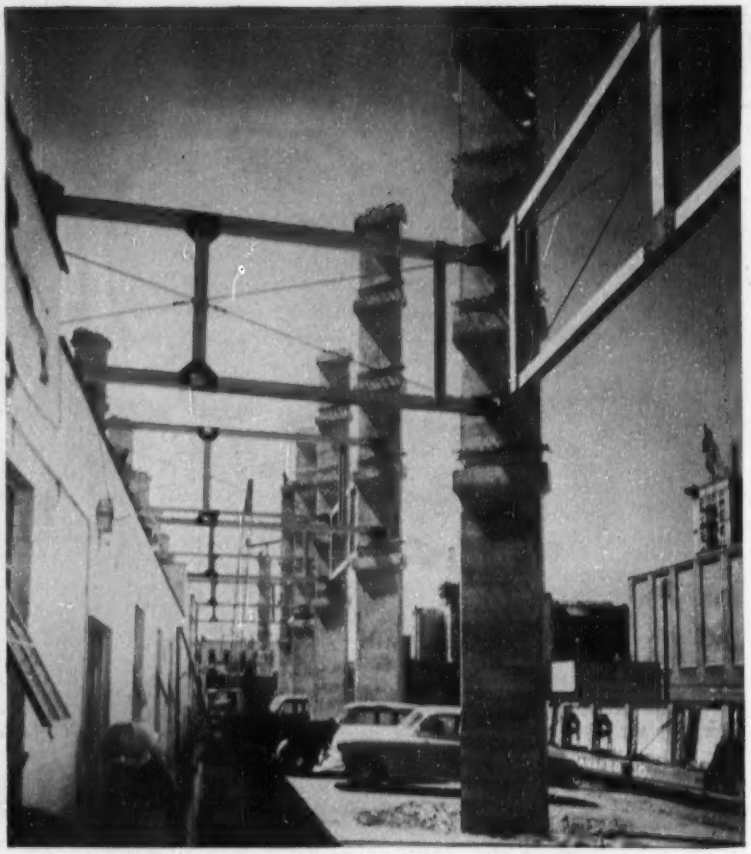

COLUMNS ARE BRACED laterally pending construction of top floors.

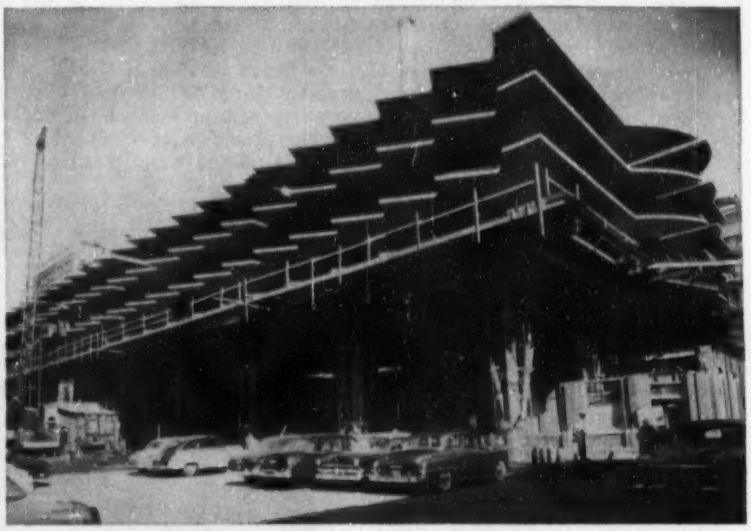

FLOOR SLAB FORMS are re-used for each of the five floors. Top slab was cast first and forms winched down to next position.

was about ½ hour. Following this procedure the contractor was able to pour an average of nearly two panels a day.

• **Slab design**—Slab design was made complex because the columns were positioned at 60-deg angles to minimize interference with the parking pattern. Slab thickness is 7 in., but included is a tapered haunch 18 ft square. Thickness increases to 14 in. for a 5-ft square around the columns.

A model analysis made by Presan

Corp. of Los Angeles aided slab design. In addition to the complications developed by the column orientation and the heavy haunch, the design had to consider the floor for both construction and finished conditions: During construction there were extensive cantilever elements, but after gaps between form panels were closed, the slab became continuous. The model analysis facilitated this design, and gave the qualitative effect of the 5% seismic load.

Another application of the model analysis was in slab form design.

The forms were designed as carefully as the building to minimize deflection during construction operations. Included in design considerations was the elastic deformation of the slab plus the plastic deformation of the concrete and the deflection of the forms under the weight of the wet concrete. Elastic deformation of the slab came from the model analysis.

Each form panel is supported by four 18-in., 50-lb wide-flange beams in the east-west direction. Across these are five 15-in., 42.9-lb I-beams in the north-south direction. And there are additional steel or wood cross beams supporting the 2x10 joists at 2-ft centers. The forms are faced with ¾-in. plywood sheathing. The plywood was coated with a plastic paint before the first use and thoroughly cleaned without recoating after each subsequent use.

The slab concrete has 4,000 psi strength and includes an air-entraining admixture. Purpose of the air entrainment is to resist spalling due to use of salts on Salt Lake City streets during winter ice conditions.

The $1-million building was designed for the department store by Bowen, Rule & Bowen, consulting engineers of Los Angeles. Contractor on the work is Jacobson Construction Co. of Salt Lake City.

Joint Construction Agency Gets New Deputy Director

Brig. Gen. Herbert W. Ehrgott, USAF, has been appointed deputy director of the Joint Construction Agency, U. S. European Command. He has been serving as deputy to the Assistant Chief of Staff, Installations, U. S. Air Force headquarters in Washington.

Highlights of his military career include service as an observer with British forces during the Middle East campaigns of 1941-2; engineer, Ninth Air Force; Chief of Staff, Ninth Air Force; Chief of Staff, Ninth Engineer Command (which constructed most USAAF airfields in northern Europe during the war); and commander of Aviation Engineer Force, U. S. A. F.

TALLER & COOPER BOOTHS safeguard personnel as they serve the public

Weatherproof, accident-proof all steel Taller & Cooper Booths assure safety and comfort for personnel on the West Virginia Turnpike, as they do at parks, parking lots and toll facilities all over the country.

Functionally designed and pre-fabricated, Taller & Cooper Self-Contained Booths are installed in a matter of hours, eliminating long weeks of on-the-site construction. With over 20 years of know-how in the design and manufacture of toll equipment, Taller & Cooper can give you superior custom-planning on any facility you are planning to build or modernize. Call on the nation's first choice . . . Taller & Cooper.

WRITE TODAY for design and construction details.

TALLER & COOPER, INC.

ENGINEERS • MANUFACTURERS

TOLL BOOTHS • TOLL COLLECTION SYSTEMS

75 FRONT STREET • BROOKLYN 1, N. Y.

TALLER & COOPER Toll Collection Equipment Is Used On Every Major Toll Facility In The U. S.

SITE for warehouses was a fill with high water table in which concrete piers had to be constructed, founded on rock.

HOLE BORER drilled to rock, a paper form was inserted and concrete placed in the tube immediately. But there still were a few problems to be solved.

BUCKET was sometimes needed for additional excavation from the form.

Paper Forms Solve Tough Foundation Problem

E. L. Scruggs
Vice President and Chief Engineer
The Springs Cotton Mills
Lancaster, S. C.

The site was a fill. The water table was within 4 ft of grade; so the entire area was unstable. But 10 to 15 ft below grade was a good rock stratum. How could reinforced concrete footings for heavily loaded buildings be constructed through the overlying muck and to the rock with the least expense?

That was the problem the engineering department of The Springs Cotton Mills was faced with in planning two 2-story warehouses in Lancaster, S. C. Of flat-slab construction, the buildings were designed for a 200-psf load.

The site—adjacent to a creek—had been used as a dumping ground for years. It was not suitable for installation of conventional piles, since they would be of insufficient length, and lack any skin friction. An open-ended pipe pile was considered; but the cost was excessive.

The solution was to use a hole-boring machine with a 20-in.-dia auger to excavate to rock, then quickly drop a 16-in.-dia heavy-paper form into the hole before mud seeped into it.

Of course, water rose quite rapidly in the tube. However, in most cases there was no particular difficulty in pumping out the tube, placing a prefabricated reinforcing cage in it and following immediately with a dry concrete, well vibrated.

• **Difficulties eliminated**—It was found that the bottom of the tube would disintegrate under water if left standing too long. Therefore, a collar of lightweight metal was fabricated and placed on the bottom of the tube. Also, the first 4 or 5 ft were treated with bitumastic, which would allow the tube to stand in water for a considerable length of time in good condition.

In one area, adjacent to the creek, it was found that the mud could not be kept out of the holes long enough to place the paper form. In these few holes, a special pipe was fabricated of 10-ga metal, spot-welded, dropped into the hole and driven to rock with a sheeting hammer. The metal pipe was made just long enough to come to ground level, and to it was spliced the paper form for the upper portion of the concrete column that was required to reach final grade.

Since the site had been used as a dumping ground, a great deal of debris was encountered. It was necessary to use a small orange-peel bucket, manually operated, to remove this material from some of the shells.

There was no waste of form material. The tubes were bought in 18-ft lengths and cut off at the desired levels. The remainder was re-used by splicing on to a shorter section elsewhere.

More than 200 footings were placed in about six weeks at a low labor cost. We consider this method to be very economical where soil conditions warrant this type of construction.

Foundation plans were worked out and foundations placed by the engineering department of The Springs Cotton Mills. The flat-slab construction and structural plans for the warehouses were prepared by J. N. Pease & Co. of Charlotte, N. C. The paper forms are manufactured by the Sonoco Products Co., Hartsville, S. C.

Seven deep bridge piers 100 ft. apart

DEWATERED AT ONE TIME *by* WELLPOINTS

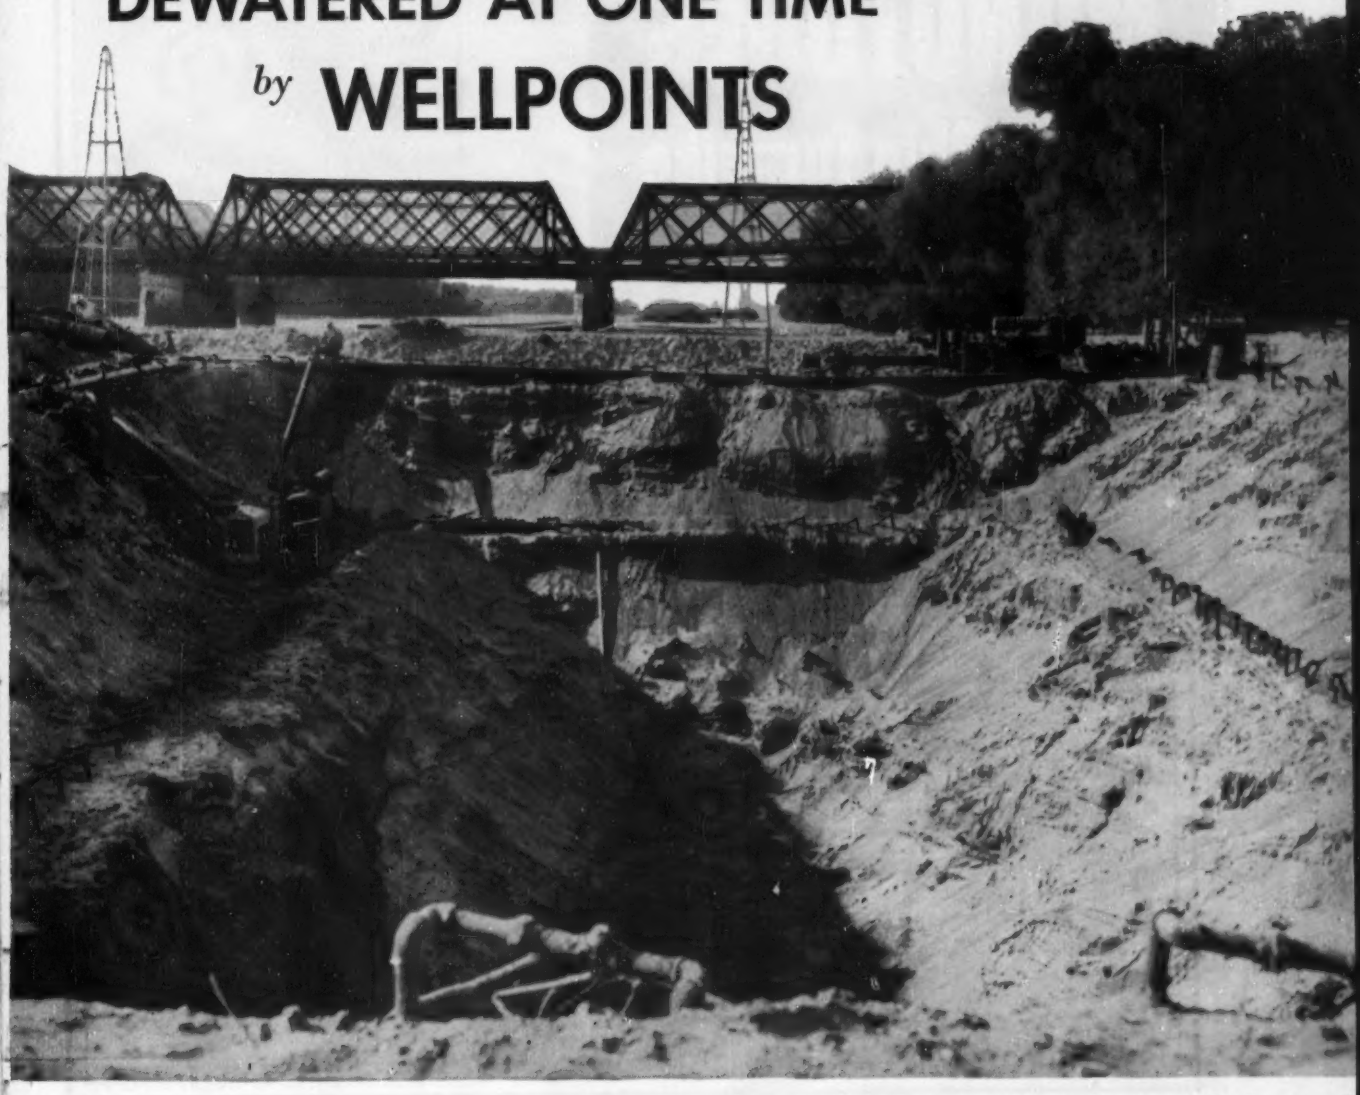

Contractor for the substructure: McCarthy Improvement Co., Davenport, Ia

This is Pier #4, one of seven being constructed for the new Clinton-Illinois Mississippi River Bridge. A Moretrench Wellpoint System pumped 25′ of water out of this hole leaving it safe and dry for pile driving operations. No sheeting was needed. A common suction line linking each pier eliminated several pumps.

Expert planning, careful installation and supervision of the pumping system insured progress on this job *right from the start.*

For full details on how to work economically in the dry, contact our nearest office.

MORETRENCH CORPORATION

90 West St. New York 6 | 4900 S. Austin Ave. Chicago 38, Illinois | 7701 Interbay Blvd. Tampa 9, Florida | 315 W. 25th St. Houston 8, Texas | Rockaway New Jersey

Western Representative: Andrews Machinery of Washington, Inc., Seattle 4, Washington

Canadian Representative: Géo. W. CROTHERS Limited, Toronto, Ontario

MONOTUBES
on the Ohio Turnpike

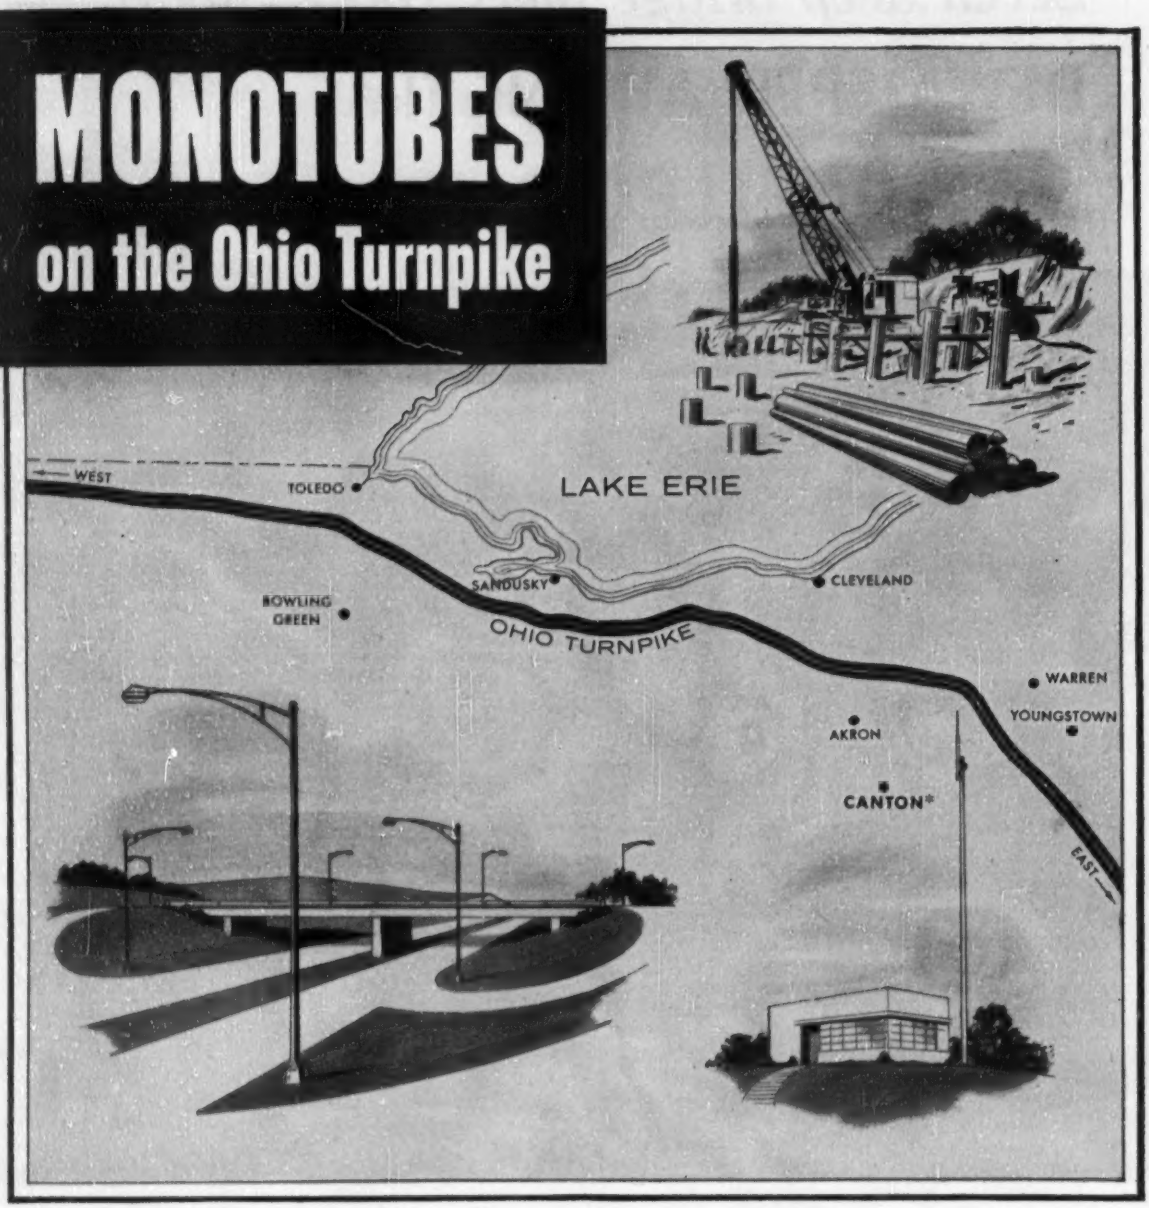

ALL along the 241-mile Ohio Turnpike you'll find steel Monotubes—1,322 Monotube lighting poles for entrance plazas and interchanges, 44½ miles of Monotube foundation piles for structures, and self-supporting Monotube antenna masts at each of the 15 interchanges and the two terminal gateways for radio communication.

Take the tip from leading contractors and engineers . . . specify Union Metal Monotubes. For further information, write today to The Union Metal Manufacturing Company, Canton 5, Ohio.*

Monotube Lighting Poles
Monotube Foundation Piles
Monotube Antenna Masts

UNION METAL

MEN AND JOBS

Col. William F. Cassidy Gets South Pacific post

Col. William F. Cassidy has been appointed by the Corps of Engineers as South Pacific division engineer, with headquarters in San Francisco.

He succeeds Col. Paul D. Berrigan, who is being transferred to the Far East Command. The reassignments become effective this month.

Cassidy was named Berrigan's assistant last August after completing a year's work at the National War College.

A graduate of the U. S. Military Academy, (1931), he received his master's degree from the University of Iowa in 1934, and is a graduate of the Engineer School, Fort Belvoir.

Cassidy's previous duty includes two years as assistant to the district engineer, Portland, Ore.; two years with the 3rd Engineers in Hawaii; three years as deputy to the president of the Mississippi River Commission and to the division engineer of the Lower Mississippi Valley Division at Vicksburg, Miss.

In World War II, Cassidy commanded the 816th Engineer Aviation Battalion and the 21st Engineer Aviation Regiment. He was also assigned to the War Plans Division Office of the Chief of Engineers.

When the emergency arose in Korea, Col. Cassidy was sent to the Far Eastern Command. There, he served for three years as Chief, Supply Division, Engineer Section, Japan Logistic Command, and later became executive officer, Engineer Section, General Headquarters, Army Forces, Far East.

(Continued on page 52)

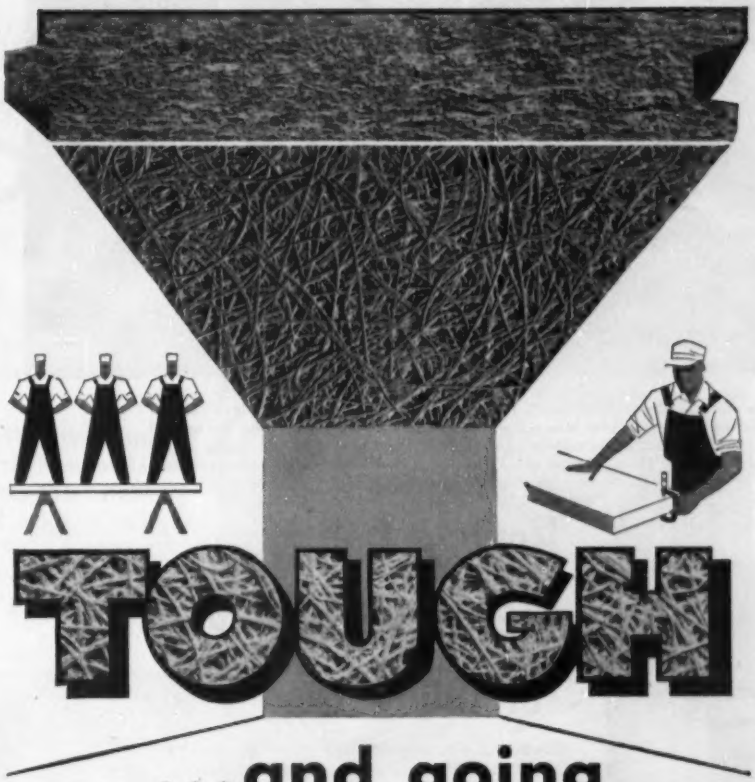

...and going to stay that way!

Roof Decks of Tectum® plank or tile "hang together" even when overloaded to the point of rupture. Its toughness prevents sudden breaks — assures reliable structural safety. Nailed, clipped or grouted Tectum Decks carry roof loads of 200 psf and more on economical spans. Wood fibers mesh and intermingle in Tectum, eliminate direct stress at any point. Maximum stability results. Laboratory tests established an average dimensional change of only 15/100 of 1% at 98% R.H



Only Tectum combines structural strength and dimensional stability with 7 other distinct qualities in single-layer, job proven roof decks: insulative, acoustical, textural, noncombustible, low cost, lightweight and termite and fungus proof.

SEE IT NOW! Ask for sample and catalog or refer to Section Te/2e, Sweet's Architectural File.

Tectum® Div.
The Alliance Manufacturing Company
105 SOUTH SIXTH STREET, NEWARK, OHIO

TECTUM DIV.
ALLIANCE MANUFACTURING COMPANY
Dept. #130, 105 S. Sixth St., Newark, Ohio

_____ Send sample and catalog.
_____ Send sample only.

Name _____ Title _____
Company _____
Address _____ City _____ State _____

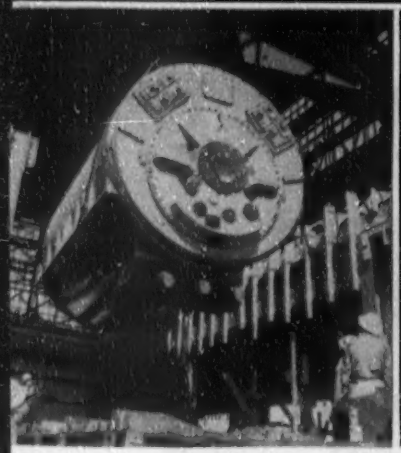

Multiple-part Red-Strand Slings handle heaviest loads, and are easy to apply to both the load and the crane hook. User tests in Detroit proved Red-Strand slings withstood unusual abuse, yet maintained higher-than-rated strength. A Gary plant uses Red-Strand single-part slings for many lifting jobs like this. These slings are available with various combinations of end fittings for attaching the sling to rings or lugs.

How to Select the Correct Sling for Your Job

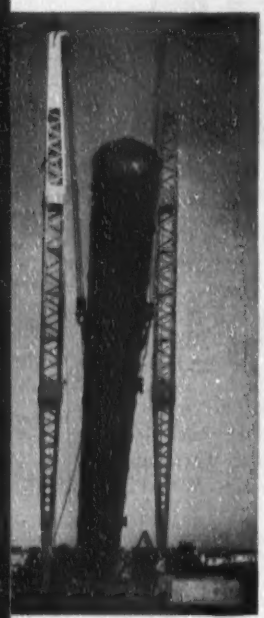

A heavy cylindrical load usually calls for multiple-part Red-Strand Flat-Laced slings. They are strong, flexible and do not slip or abrade.

Start your sling selection by analyzing five factors:

1. The load—its size, weight, shape, finish.
2. Working area, amount of head room.
3. Size and type of crane hook.
4. Angle of sling legs.
5. Location and type of lugs or rings, if any.

From this information your supplier can recommend the sling by type, size and length that is safest, longest lasting and most economical for your job.

Types of Slings

Multiple-part slings are always recommended for heavy duty service, because for equal strength they are far more flexible than single-part slings. They hug the shape of the load easily, present a greater bearing surface to the load, and reduce the possibility of marring surfaces.

Where these factors are not so important, either Red-Strand ***single-part slings*** or ***grommet slings*** may be used for economy. Single-part Red-Strand slings are often recommended for lifting lighter weight objects, or those that have fixed attaching rings or lugs. Grommet, or continuous strand Red-Strand slings are ideal for forming hitches of various types without fittings.

When you re-use Pin-Lock thimbles you reduce sling costs by 21%

Extra Savings

Two suggestions will help you save money on slings.

The first is to re-use Pin-Lock thimbles on multiple part slings. These exclusive Leschen Pin-Lock thimbles cut sling costs on an average of 21% because they may be used again and again. They lock into sling loops with pins instead of permanent clamps, permitting re-use, and eliminating constant expense of thimble replacements.

The second suggestion is to use Red-Strand slings because they are made of ***higher-than-rated*** quality Leschen wire rope that delivers ***longer-than-expected*** service.

Get a copy of Leschen's *Sling Handbook* for complete information. Ask your Leschen man for one, or write.

LESCHEN WIRE ROPE DIVISION
The Watson-Stillman Company
(A SUBSIDIARY OF H. K. PORTER COMPANY, INC.)
St. Louis 12, Missouri

LESCHEN
HERCULES Red-Strand
WIRE ROPE

MEN AND JOBS

Smoke Control Engineer Resigns at Columbus

Harry C. Ballman has resigned as chief smoke regulation engineer for Columbus, Ohio, and will remain in Pittsburgh with the Mellon Institute, where he has been on leave of absence for several months.

As senior fellow in Mellon's air pollution control program and as executive secretary of the Air Pollution Control Association, Ballman will continue to coordinate the efforts of various groups in his field.

He had been with Columbus since early 1950 and was largely responsible for the national recognition which the city obtained for its progress in smoke regulation.

Shift District, Fort Belvoir Army Engineer Officers

Brig. Gen. Louis W. Prentiss, engineer commissioner of the District of Columbia since January 1953, has been named to command The Engineer Center, Fort Belvoir, Va. He will take over his new assignment on Dec. 10.

His successor in Washington will be Col. Thomas A. Lane, Army Field Forces engineer at Fort Monroe, Va.

A graduate of the Colorado School of Mines, Gen. Prentiss was commissioned in the Army in 1921 and has been with the Corps of Engineers since 1929. He was stationed at Fort Belvoir's Engineer Replacement Center for three years during World War II and was serving in the European Theater of Operations when the war ended.

Subsequent posts included district engineer, Omaha; southwestern division engineer, Dallas; and Assistant Chief of Engineers for Personnel and Administration.

Col. Lane was commissioned in the Corps of Engineers in 1928, following his graduation from West Point. He is also a civil engineering graduate of MIT and a graduate of the National War College in Washington.

Men and Jobs Briefs . . .

• **Careers**—Iowa Highway Commission names **Neil Welden** bridge engineer to succeed **E. W. Blumenschein**, who becomes associate engineer . . . **Lewis A. Stanley** becomes Oregon state engineer—he's been with the engineering department 15 years . . . **A. D. Sidio**, Wyoming's public health engineer, moves to Pueblo, Colo., as sanitation director.

(*Continued on page 54*)

Leakproof and Rootproof for the Life of the Line

Universal TYLOX

Flexible Rubber Couplings for Vitrified Clay Pipe Joints . . .

Tylox Rubber Couplings are factory pre-assembled — self locking — and become a permanent part of the pipe, lasting as long as the line.

Tylox is full floating and cushioned, flexible in angular and lengthwise movements. Provides multiple sealing even when ground movement might cause pipe to separate. Resistant to acids, alkali, sewerage and waste.

Assembly is simple and easy.

Write for literature.

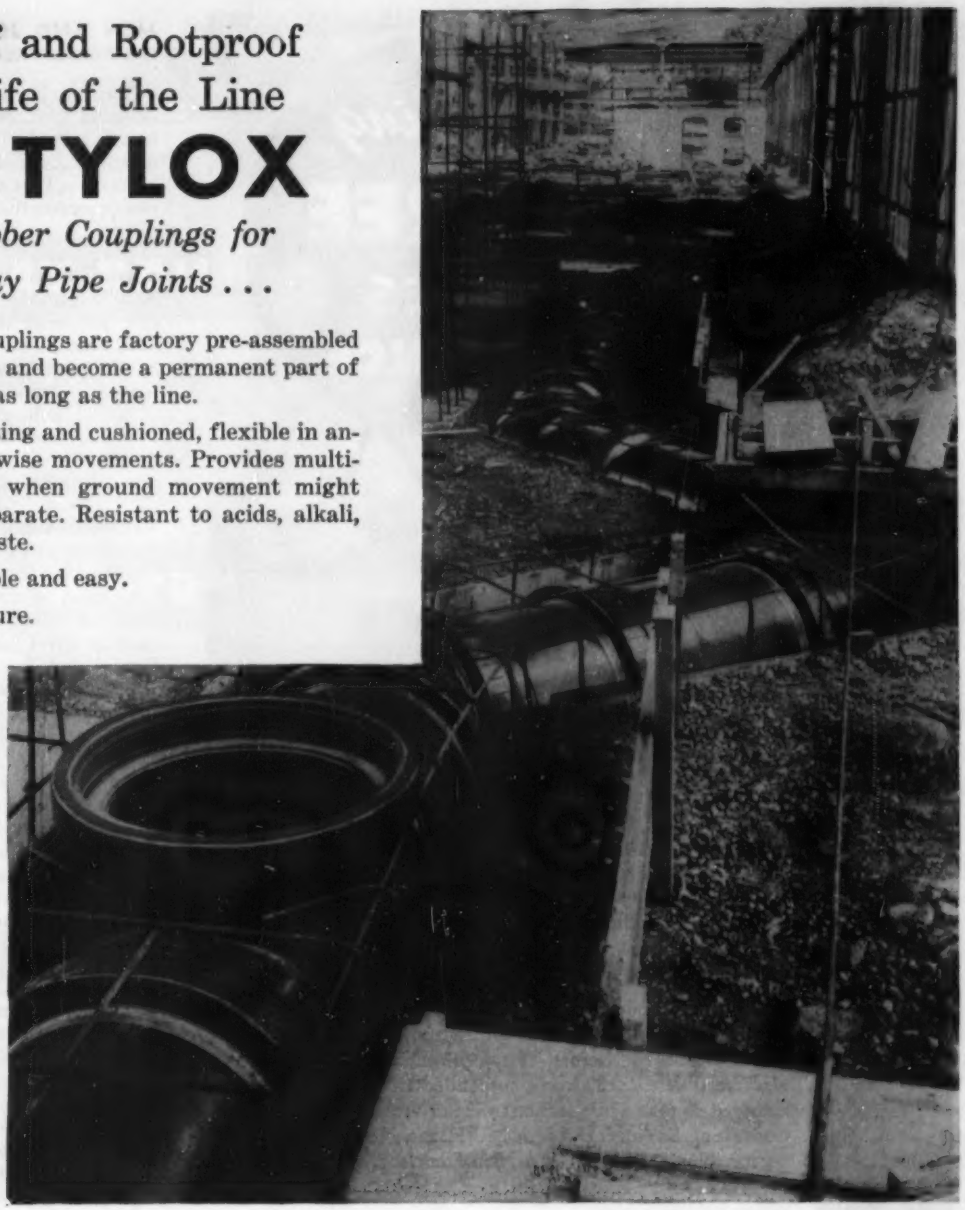

Empire Steel Company,
Mansfield, Ohio
24" Tylox
Vitrified Pipe

ENGINEER

Paul Prince Associates,
Dover, Ohio

CONTRACTOR

Purdy Construction Co.
Mansfield, Ohio

PRODUCTS

Sewer Pipe (Vitrified)	Slipseal Sewer Joint	Flue Lining
Sewer Pipe (Concrete)	Segment Sewer Block	Stove Pipe
Vitrified Liner Plates	Meter Boxes	Chimney Tops
Tylox Flexible Rubber Coupled Vitrified Pipe	Ship Lap Wall Coping	Chimney Pots
	Septic Tanks	Fire Brick
Aerodrane Filter Block	Drain Tile	Fire Clay

Vitrified Clay Plate Lined Concrete Pipe
Conduit for underground steam and insulated piping

SALES OFFICES:

BALTIMORE, MD. — HALETHORPE BRANCH — Box 7769 — Tel. Elkridge 877
PHILADELPHIA, PA. — P. O. Box 30, BRISTOL, PA. — Tel. Enterprise 6015, Tel. Bristol 8-5571
CINCINNATI, OHIO — P. O. NEWTOWN, OHIO — Box 215 — Tel. Locust 7846

FACTORIES:

BALTIMORE, MD., CINCINNATI, OHIO, NEW PHILADELPHIA, OHIO,
PALMYRA, OHIO (2), PHILADELPHIA, PA., UHRICHSVILLE, OHIO (2)

UNIVERSAL SEWER PIPE CORPORATION
UNITED STATES CONCRETE PIPE CO.

● ***GENERAL OFFICES*** • **1500 Union Commerce Building** • **CLEVELAND 14, OHIO**

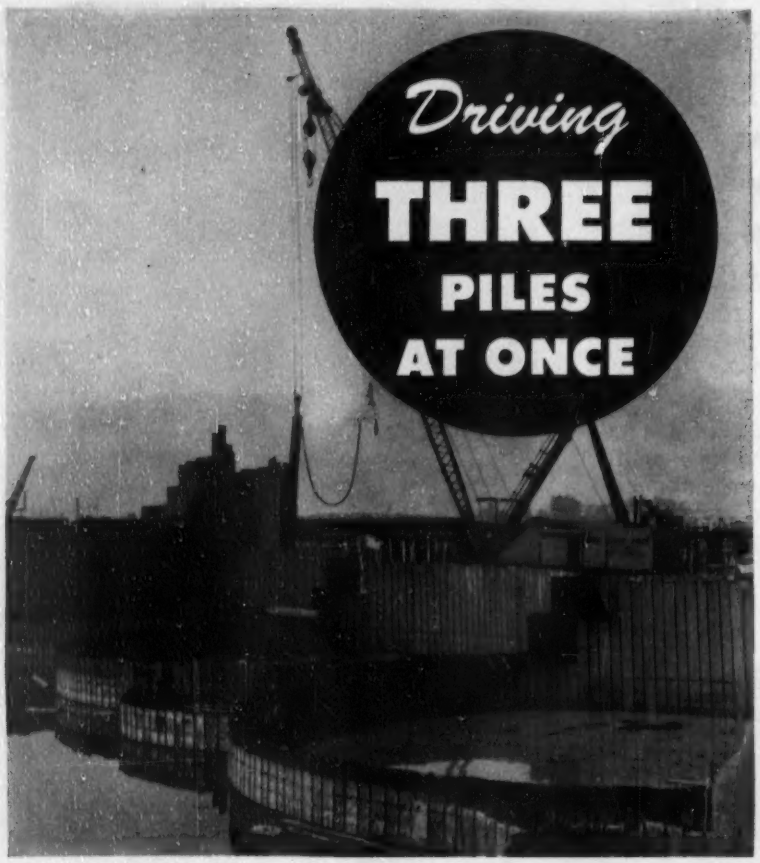

McKiernan-Terry
983 Double-Acting
Pile Hammer

About the most difficult part of the recent pier construction job at the port of Portland, Oregon, was driving the piles of many different types.

Part of the pile driving job consisted of a number of circular cells as shown in the illustration, and for this part of the work McKiernan-Terry 9B3 Double-Acting Pile Hammers were used, freely suspended from crane boom, arranged so that 3 pile sections were driven simultaneously. Consulting Engineer, Frederick R. Harris, New York; Contractor, Guy F. Atkinson Co., San Francisco.

Here, as at construction projects all over the world, McKiernan-Terry Hammers were used to simplify pile driving operations.

McKIERNAN-TERRY CORPORATION
MANUFACTURING ENGINEERS
Also Manufacturers of Coal and Ore Unloaders and Bridges, Grab Buckets, and Special Machinery
13 PARK ROW, NEW YORK 38, N. Y.

McKIERNAN TERRY

NK 3484

MEN AND JOBS

• **Corps of Engineers**—Mobile district engineer **Col. Harry L. Fox** is being transferred to Headquarters Communication Zone, U. S. Army, Orleans, France . . . **Lt. Col. Oak E. DeBerg** becomes executive officer, St. Paul district.

• **Associations**—New president of AGC's Carolinas branch is **A. J. Fox,** vice president of F. N. Thompson, Inc., Raleigh, N. C. . . . **Prof. Erasmus S. Borquist,** head of University of Arizona's department of engineering, receives life membership in ASCE . . . **Frank L. Raschig** becomes first life member of Ohio's Society of Professional Engineers.

• **Honors**—Annual award of Washington Society of Engineers for "outstanding contribution to the advancement of engineering knowledge" went to **Clifford A. Betts,** now an associate in the Chicago firm of Alvord, Burdick and Howson.

Gordon N. Scott, Los Angeles consulting engineer, and **W. H. J. Vernon** of England will be presented in March with the 1955 awards of the National Association of Corrosion Engineers.

• **Business**—Kuljian Corporation names **Jaime Fonrodona** its Caribbean representative with headquarters in Caracas, Venezuela . . . **Millard M. Moore** becomes chief engineer of D. C. Byers Co.—was formerly Grand Rapids city manager . . . **Richard L. Boke** leaves Bureau of Reclamation to head up Reynolds Metal Company's new irrigation industry products division.

McGraw Construction Co., Middletown, Ohio, names **Elliott D. Levey** president and **Carl H. Martin** administrative vice president . . . **E. C. Brekelbaum** becomes assistant to general manager of Thew Shovel Co. . . **Paul H. Hardaker** and **I. M. Huddleston** leave Bushnell Steel Co. to open own engineering firm in Jacksonville, Fla.

• **Retirements**—Career employe **Edward W. Wendell** from New York State Dept. of Public Works—for 10 years deputy chief engineer in charge of bridges, grade separations and structures . . . **Don G. Evans** as construction engineer for California's division of highways, after 25 years . . . **John M. Nicholson** from Long Island Railroad—51 years in the engineering department, two years as chief engineer . . . **Col. McD. D. Weinert** from U. S. Army, after 33 years with Army Engineers.

HIGHWAY RAILINGS OF ALCOA ALUMINUM

SAVE 30¢ PER FOOT ON OHIO TURNPIKE!



• The bridges you see here are among approximately 300 along the Ohio Turnpike which will have parapet railings of Alcoa® Aluminum. All in all, there will be some 225,000 lineal ft of bridge railing made from Alcoa Aluminum along the 241.4-mile toll road.

Low initial cost is one reason why Alcoa Aluminum was chosen for Ohio Turnpike highway railings. Total installed cost of these railings of Alcoa Aluminum is at least 30¢ per ft less than railings of other metals. This saving is made possible by the easy workability of aluminum, making possible faster fabrication. The lightness of aluminum makes both fabrication and erection easier and less time consuming. Alcoa Aluminum Highway Railings never need painting.

Maintenance free. An equally important cost advantage of aluminum is that it renders the highway railings maintenance-free.

Pleasing modern appearance of aluminum is another plus. The attractive gray finish as it comes from the mill weathers to a pleasing color that blends harmoniously with other construction materials.

To get complete information on the use of aluminum for highway railings, including basic technical data and suggested construction specifications, send today for our 32-page manual, *Bridge Railings of Alcoa Aluminum.* ALUMINUM COMPANY OF AMERICA, 1974-M Alcoa Building, Pittsburgh 19, Pennsylvania.

ALCOA ALUMINUM

ALUMINUM COMPANY OF AMERICA

ALUMINUM COMPANY OF AMERICA
1974-M Alcoa Building
Pittsburgh 19, Pa.

Please send me without cost or obligation, 32-page manual, *Bridge Railings of Alcoa Aluminum.*

Name_____

Title_____

Company_____

Address_____

City_____ State_____

Paving the way for the new tax laws on depreciation, a House Ways and Means Committee report (HR No. 1337) stated, "The average machine . . . actually depreciates considerably more and contributes more to income in its early years of use than it does in the years immediately preceding its retirement."

"PAYD"* PLAN

gears new equipment payments to fast depreciation

* "PAY-AS-YOU-DEPRECIATE", C.I.T.'s new plan, is based on the fast, more realistic depreciation schedules allowed by the new tax law. It offers you the best purchase plan for buying and depreciating new equipment.

"PAYD" helps you buy new machine tools, construction equipment and other profit-making, cost-cutting machines. Now 70% of the depreciation can be taken in the first half of the life of your new asset. And your "PAYD" installment payments are *geared directly to your new, fast depreciation allowance schedules.*

"PAYD" gives you new long terms

The "PAYD" Plan extends the time of financing on many kinds of equipment. Often the terms will match the entire useful life of the equipment. Terms are now ten years on machine tools and six years on construction equipment.

"PAYD" finance charge

The finance charge is 4.25% for each year of the term computed on the original unpaid balance.

"PAYD" opens the way for sound expansion

C.I.T.'s new "PAYD" Plan is the ideal method for buying needed new tools or equipment to expand—or beat competition. You retain your operating capital and acquire new profit-making equipment on a sound basis.

Consult with financing specialists

The "PAYD" Plan is a logical extension of the financing service C.I.T. Corporation has been giving industry for 46 years. Let one of our representatives put this experience to work for you. Write or call.

C. I. T. CORPORATION

The Wholly-owned Industrial Financing Subsidiary of C. I. T. Financial Corporation
Capital and Surplus over $195,000,000

DIVISIONAL OFFICES

Atlanta
66 Luckie Street, N. W.
Cypress 8621

Chicago
221 N. LaSalle Street
Randolph 6-8580

Cleveland
750 Leader Building
Main 1-4824

Houston
1100 E. Holcombe Blvd.
Lynchburg 3921

Los Angeles
416 W. 8th Street
Michigan 9873

Memphis
8 North Third Street
Memphis 5-6795

New York
390 Fourth Avenue
MUrray Hill 3-6400

Philadelphia
1530 Chestnut Street
Rittenhouse 6-8180

Portland, Ore.
Equitable Building
Capitol 9721

San Francisco
660 Market Street
Yukon 6-5454

IN TESTING pavements the device's vibrations, transmitted through bed plate on the road, are picked up by oscilloscope recorder, in man's hand. Vibrations resemble traffic.

Dynamic Pavement Tester Demonstrated; Device Checks Full Road Structure

Demonstrations of a Netherlands-developed asphalt pavement testing apparatus, employing a machine in stationary position to simulate the effects of a moving load, continue to arouse interest among U. S. highway engineers.

The testing equipment, developed by Shell Oil Co. engineers over a 10-year period, was most recently demonstrated at the Bureau of Public Roads Research Station in Virginia. It was used for five weeks on the Idaho test road of the Western Association of State Highway Officials, which is expected to make some of its findings available next year. Other tests have been made by the Army Engineers and a few state highway departments.

The equipment, which has the advantage of extreme mobility and ease of operation, measures stiffness (relation of load and deflection), strain, velocity of wave propagation in the pavement, and the fatigue characteristics of the roadway.

• **How it operates**—A dynamic force is generated by revolving eccentric weights on horizontal shafts. These loads are imparted to the pavement through a vertical shaft and base plate which rests on the roadway. By changing the sizes and eccentricities of the weights and the speeds at which they turn, various traffic conditions are simulated.

The base plate of the machine has a hard rubber face, similar to a tire, and the vibrating pressure that may be applied runs from 20 psi to 80 psi.

Loading frequency can be controlled between 5 and 60 cycles per second so that the load is in place about the same length of time as in the passing of a vehicle.

Measurements of the intensity of the vibrations induced in the pavement are picked up by electronically activated vibration recorders and are shown on an oscillograph and other instruments in a control truck.

• **Measuring capabilities**—Stiffness of the pavement can be measured as a single magnitude, the relation of dynamic load per unit of deflection. Strains, as small as one ten-thousandth of an inch, can be measured in the surface of the pavement, both under the vibration machine and under moving traffic.

The dynamic shear modulus of subsoil and subbase, in place, can be calculated through the measurements of the rates of wave propagation produced by the vibration machine. The basic sinusoidal curves indicated on

(*Continued on page 58*)

SURVEYING NEWS

NEW THEODOLITE SETS UP QUICKLY, EVEN IN THE WIND

Has this been your problem? Now—old-type mechanical plumb-bob replaced by can't-miss optical principle

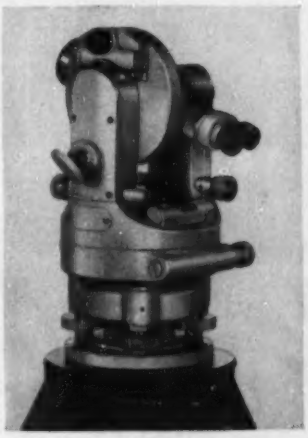

- Improved Theodolite reads horizontal and vertical circles simultaneously, through same eyepiece
- Reads direct to 1 min. with no matching of lines—no parallax
- Amazingly blur-free—small, compact, moisture-proof, dust-proof.

Mail this coupon for details

FENNEL

INSTRUMENT CORP. OF AMERICA
11-27 44th Rd., LONG ISLAND CITY, N. Y.

Please send me Booklet A with information on Fennel . . .

☐ Double bubble ☐ Alidades
☐ Other levels ☐ Collimators
☐ Transits ☐ Stands
☐ Combinations ☐ Tripods
☐ Theodolites ☐ Repair of present instruments, (any make)

NAME.....

ADDRESS.....

.....

Best way to achieve SPECIFIED DENSITY in

ROCK, SLAG, SOIL-BOUND MACADAM, GRAVEL and SAND BASE COURSES

use...

JACKSON VIBRATORY COMPACTORS!

On jobs such as this, soil-bound macadam—5 inches thick, the JACKSON MULTIPLE COMPACTOR, *now more powerful than ever*, achieves specified density in JUST ONE PASS. It is equally efficient on rock, or slag base and all other granular soils.

Quickly adaptable to widening, the JACKSON MULTIPLE COMPACTOR is shown here consolidating slag macadam base course 36 inches wide and 9 inches thick. Using three of the machine's powerful compactor units in tandem, it readily obtains specified density in ONE PASS.

Twin hook-up of manually guided JACKSON COMPACTORS consolidating gravel base for a large pavement repair area. These machines, used singly or in tandem, or side-by-side twin hook-ups, are exceedingly efficient for all types of granular soil base and fill compaction; also for bituminous patching and driveway construction. Operated from a trailer-mounted JACKSON POWER PLANT which may also be used for other power tools and lights.

See your Jackson Distributor or write to us for complete information on these machines.

JACKSON VIBRATORS, INC. LUDINGTON, MICH., U. S. A.

the oscillograph have easily discernible differences for the subsoil and subbase.

By use of strain gauge equipment under traffic and comparison of this data with that found for the vibrating machine on the same pavement, a clear and close relation has been established between the machine's action and that induced by traffic. Relations between various measurements are of an empirical nature, but they do show promise of wide application.

It has the advantage of being nondestructive, requiring no samples or laboratory work. And, of course, it provides immediate findings. Not only can it evaluate load carrying capacities of existing asphaltic pavements, but it is expected to lead to better pavement design and construction methods.

Metal Adhesives Prove Effective in NBS Tests

Tests made on riveted and glued metal aircraft structures at the National Bureau of Standards indicate that the mechanical properties of both types of connections are not too different. Thus, high-strength metal-to-metal adhesives may be substituted for rivets in some cases, when economic, structural and weight-saving advantages may be secured.

The tests were conducted by Wilhelmina D. Kroll and Leonard Mordfin of NBS under the sponsorship of the National Advisory Committee for Aeronautics and the Navy Bureau of Aeronautics.

Included in the investigation were sandwich panels consisting of aluminum-foil honeycombs glued to aluminum alloy sheet facings; also sheet stringer panels consisting of a sheet with stiffeners attached longitudinally to one side.

NBS tested 21 riveted and bonded sheet-stringer panels fabricated from 75S-T6 alloy with five stringers each, at 3½-in. intervals. Nine panels were riveted with a 1½-in. pitch, nine were bonded with an epoxy resin adhesive and three were bonded with a phenolic resin-rubber adhesive.

The tests showed that the primary advantage of bonded sheet-stringer panels over riveted ones with one line of rivets per stringer is increased stability because of the broad area of attachment between stringer and sheet. The disadvantage of bonded panels is that under maximum load in flat end compression they are almost completely destroyed, whereas riveted panels fail by local buckling of the sheet.

STEEL **BRIDGES**

for today's
highways

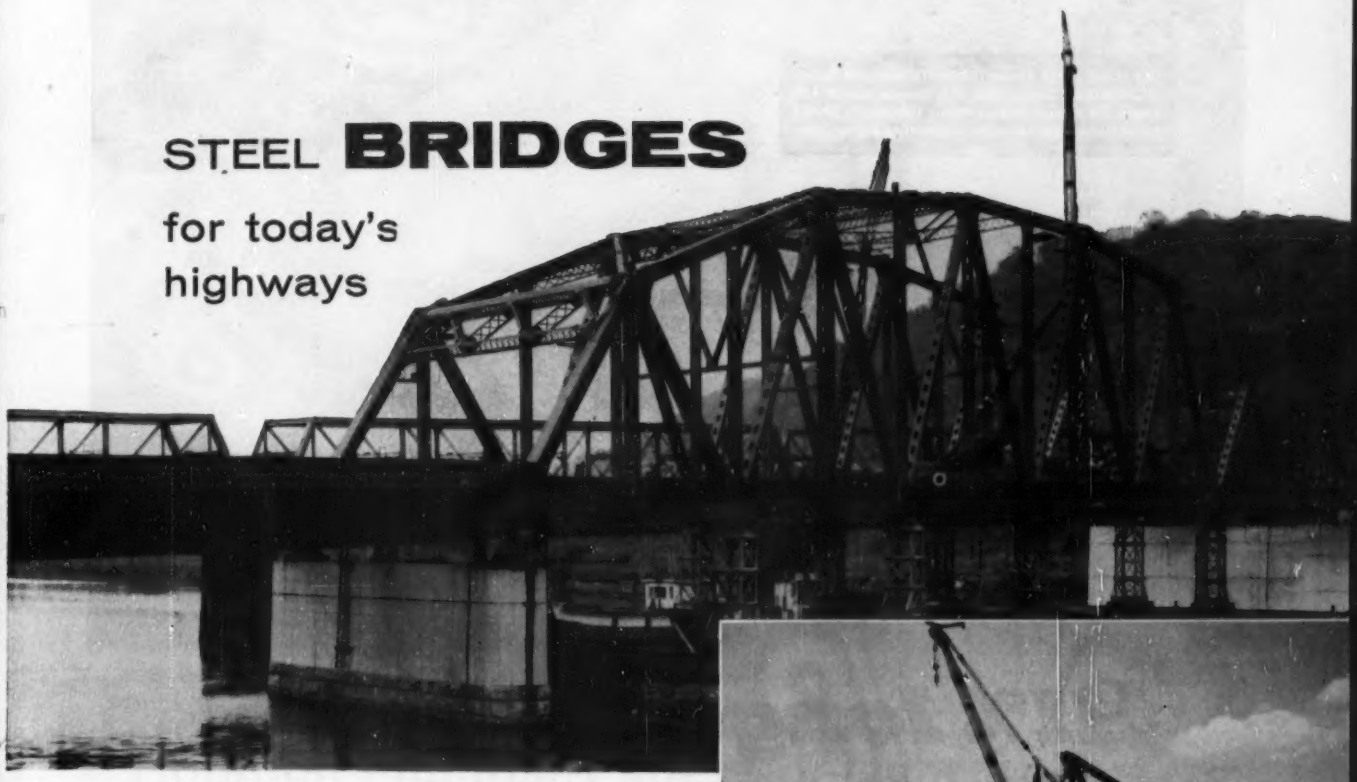

PITTSBURGH ·DES MOINES

Modern highways demand modern bridges wherever roads must "take to the air." For half-a-century, bridge fabrication and erection have been a vital part of our activities, with every advance in design and method reflected in the dependable structures we build. ● The project pictured is the Fleming Park Bridge at Neville Island, Pittsburgh. With an overall length of 804 feet, the bridge has a through-truss channel span of 360 feet, and will accommodate four lanes of traffic, relieving a serious bottleneck in a heavily-travelled area. ● Let us consult on your bridge requirements, and submit a quotation.

PITTSBURGH·DES MOINES STEEL CO.

Plants at PITTSBURGH, DES MOINES and SANTA CLARA

Sales Offices at:

PITTSBURGH (25),.....3414 Neville Island
NEWARK (2),.....216 Industrial Office Bldg.
CHICAGO (3), 1218 First National Bank Bldg.
LOS ANGELES (48),.....6399 Wilshire Blvd.
DES MOINES (8),.....915 Tuttle Street
DALLAS (1),.....1219 Praetorian Building
SEATTLE,.....522 Lane Street
SANTA CLARA, CAL.,.....621 Alviso Road

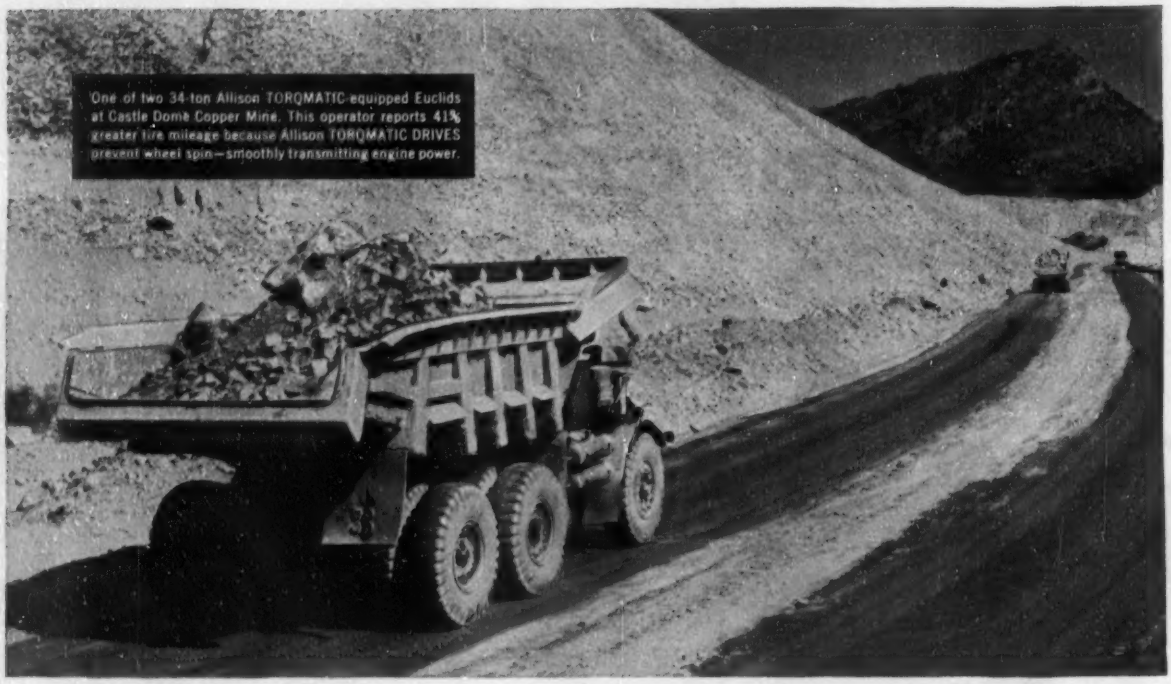

One of two 34-ton Allison TORQMATIC-equipped Euclids at Castle Dome Copper Mine. This operator reports 41% greater tire mileage because Allison TORQMATIC DRIVES prevent wheel spin—smoothly transmitting engine power.

"41% longer tire life"

Castle Dome Copper Company reports it gets 17,000 miles per tire on off-highway trucks equipped with Allison TORQMATIC DRIVES compared to 12,000 miles per tire on mechanical-drive units. But increased tire life is only part of the story—the firm also reports the TORQMATIC-equipped "Eucs" have better availability and production records.

This operator runs a fleet of 12 trucks—2 TORQMATIC-equipped "Eucs" and 10 mechanical-drive units—hauling 390,000 tons of ore and overburden per month up 8% grades on mile-long runs. The "Eucs" average 25.3 trips per 8-hour shift, each hauling about 58,000 tons per month.

TORQMATIC DRIVES smoothly transmit engine power—help prevent wheel spin that can quickly strip the tread from a tire. There's no clutch pedal to push and only three forward gearshifts—instead of the usual 7 or 10—handle all loads and grades. The *matched* converter-transmission team balances engine power and load demand, absorbs harmful drive-line shocks, prevents damage to drive-line components, helps stop engine lugging.

You, too, can cut your operating costs by specifying Allison TORQMATIC DRIVES the next time you buy. Ask your equipment dealer, manufacturer or write:

Allison Division of General Motors
Box 894E, Indianapolis 6, Indiana

ALLISON TORQMATIC DRIVES

Unbeatable Team for Maximum Operating Economy

- **Cuts** driver training costs
- **Quick-Shifts** at full throttle with fingertip hydraulic control
- **Holds** power to load at all times—no clutch pedal to push—no gearshift guess
- **Reduces** maintenance costs by absorbing shock—eliminates engine lugging—prolongs equipment life
- **Only** torque converter-transmission team designed to work as a *unit* and built by one manufacturer

FIRST MATCHED UNITS BUILT BY ONE MANUFACTURER

Allison

TORQMATIC DRIVES

COMPACT, EFFICIENT HYDRAULIC DRIVES FOR CRANES • TRUCKS TRACTORS • SCRAPERS • SHOVELS • DRILLING RIGS

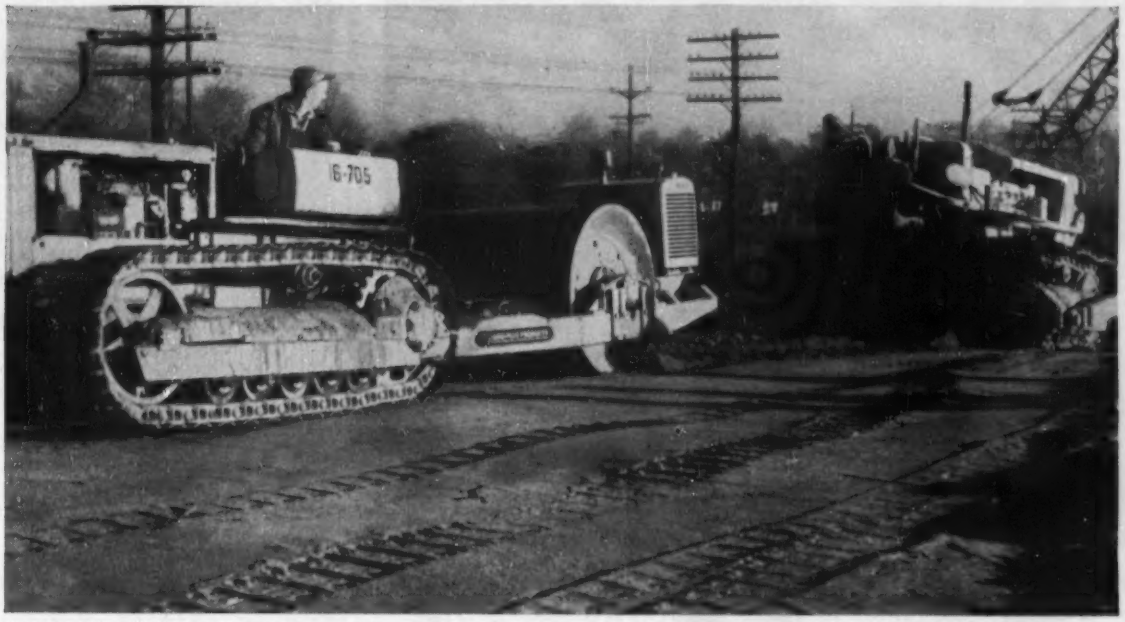

VIBRATING COMPACTOR is tractor-drawn. Either a crawler such as the Cat D4 above or rubber-tired type may be used.

Vibration Multiplies Effect of Light Rollers

A new 3-ton vibrating roller has been demonstrating considerable effectiveness in compacting sections of the S. J. Groves spread on New Jersey's Garden State Parkway. Light and compact with a turning radius of only 15 ft, the unit has been particularly useful in cramped working areas.

Designated the CH 30, the compactor consists of a single cylinder measuring 48 in. in dia and 58 in. in length vibrated by a 25-hp Waukesha diesel engine. V-belts are used to transmit power from the engine to rotate—in opposite directions—two steel balls inside the cylinder. Vibration frequency is variable from 1,400 to 1,600 vpm, and at maximum frequency the centrifugal force of the vibration is about 7 tons.

A dampener mounting reduces shock transmission to the frame. According to the manufacturer, the suspension between the frame and roller is so effective that the unit can be towed at relatively high speeds in transportation without danger of damage to the roller.

Tests conducted by consulting engineers on the Parkway job, Fay, Spofford & Thorndike, show that three passes of the roller over non-plastic silty sand produced 95% compaction at a depth of 1 ft; six passes produced 100% compaction at that depth.

Earlier tests by Prof. R. K. Bernhard of Rutgers University were conducted on soils consisting of 80% fine sand, 12% coarse sand and 8% silt and clay. Two feet was chosen as a conservative effective depth and after two passes at 2 mph the required 95% Proctor density was produced. Vibration frequency in this case was 1,500 vpm.

The company also reports superior results from an airfield project in Italy where the CH 30 is reported to have given better penetration than a 100-ton pneumatic-tired compactor.

Another vibrating compactor, the CG 10, has been designed for compact-

(*Continued on page 62*)

ONE-TON VIBRATING COMPACTOR has driving and vibrating force transmitted to the front roller while the smaller rear roller serves to guide the machine.

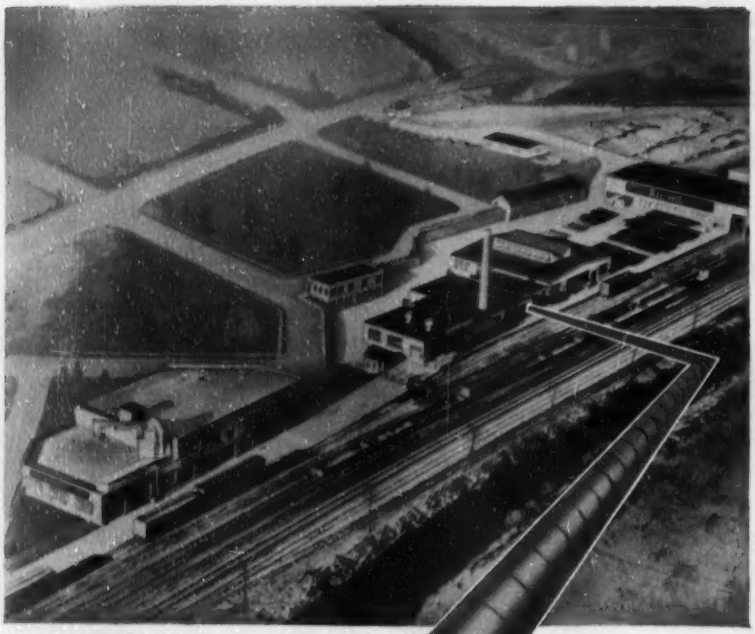

NEVER ENDING LINE OF

Quality

The Ric-wil Company represents over 40 years of manufacturing Quality Insulated piping systems. The complete Ric-wil product line is continuously pre-proven by laboratory and field tests to maintain this superior quality.

Contact your local Ric-wil representative or write direct for Catalog No. 5401

Send for Catalog 5401

Quality Piping Systems of the . . .
. . . Highest Thermal Efficiency

RIC-WIL PREFABRICATED INSULATED PIPING SYSTEMS

THE RIC-WIL COMPANY
BARBERTON, OHIO

ing backfills, road repairs, etc. This is a 1-ton double roller type powered by a 6-hp Wisconsin gasoline engine that drives the unit at two speeds forward and two reverse—65 fpm for compaction and 130 fpm for travel.

The front cylinder is both the vibratory and the driving roller while the rear roller serves as the guide. The vibrating roller is mounted to dampen shock transference to the rigid frame.

The front roller is 27½ in. long and 29½ in. in dia—the rear roller is nearly 10 in. smaller in both dimensions. Vibratory frequency is variable from 1,500 to 2,000 fpm. VIBRO-PLUS PRODUCTS, INC., 54-11 QUEENS BLVD., WOODSIDE, N. Y.

Instrument Controls High-Speed Cameras in Testing

Model 3157 Multiple-Sequence Megacycle Preset Interval Generator provides a means of generating a series of preset time delays adjustable in increments of one microsecond. Typical applications include multiple-sequence control of high-speed camera systems and radiographic units for use in destructive testing facilities.

The system includes a 1-megacycle crystal-controlled master oscillator that feeds one or more preset counters capable of producing an output pulse any desired number of counts (microseconds) after application of a start pulse. Each counter is set to the desired number of microseconds—up to 999—by means of front panel selector switches. For sequential intervals or extended delays, the output of one counter may be used to start another.

Provisions are made for using the equipment as a multiple-channel interval timer. Pulses defining an interval are used to open and close an electronic gate that causes 1-microsecond-spaced pulses to be counted during the unknown interval. Direct indication in microseconds is by means of neon lamps arranged in binary-coded decimal form. POTTER INSTRUMENT CO., INC., 115 CUTTER MILL RD., GREAT NECK, N. Y.

Trailer-mounted Tool Box Offers Mobility and Security

A pneumatic-tired all-steel tool box features side compartments, internal sliding tray and front and rear drop legs with pads, all of which lock from the inside of the box. The wheels and tires, too, lock fast from within to make the unit tamperproof. Two independent tumbler locks on the covers secure everything.

Standard safety equipment in-

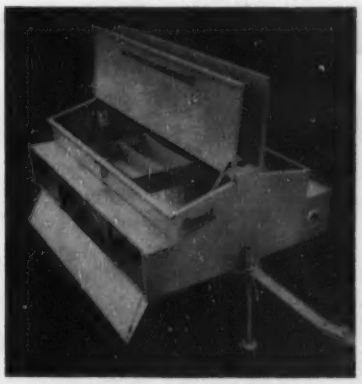

cludes two automatic red flasher lights, front and rear reflectors and tail light-license plate light. The red flasher lights are battery operated and will flash continuously for a minimum of 50 hours; standard batteries are used for replacement.

The tool trailer carries up to 2,000 lb of tools and equipment, and storage capacity, including the four side compartments, is 30½ cu ft. For flexibility and convenience the box may be unbolted from the chassis, leaving the chassis free for utility hauling, or allowing the box to be mounted on a pickup truck. AEROIL PRODUCTS CO., INC., 330 WESLEY ST., S. HACKENSACK, N. J.

New Heil Hoists and Dump Bodies Are Weight Savers

Three new telescopic hoists and weight-saving bodies now are being offered that will make greater legal payloads possible in the 21 to 30-ton capacity class.

The new hoists may be mounted inside or outside of the chassis frame rails to fit any make of tandem truck or semi-trailer. A loose parts kit supplied with the hoist is a universal type for mounting the hoist inside or outside and for a forward or backward push.

According to the manufacturer, elimination of deadweight in the bodies makes for a bigger payload than is possible with bodies of like capacity, and the specially designed bodies accommodate the forward lifting point of the telescopic hoists. A hoist basket ordinarily needed for standard arm-type hoists is not necessary, although such a basket may be easily installed should the body ever be used with a standard hoist.

The new hoists have what is reported to be the lowest mounting height of any telescopic hoist now available; the body may be mounted as

(Continued on page 66)

Here's Proof-

McDonough has the facilities and experience to handle your steel or alloy fabricating job.

Combined to meet your requirements —sound engineering design, complete manufacturing facilities, experienced workmen.

Experience in every field of industry, from the usual to the most difficult fabricated steel work—regardless of weight, bulk or tolerance. Finished projects pictured below: smoke stack, duct and breeching assembly; furnaces for petroleum industry; soap storage kettles; vacuum tubes for food processing plant; grain storage bins; flue and coolers for smelting plant; stainless steel kettle for petroleum industry; field storage tank; all-aluminum tanks for underground storage of liquid chemicals.



McDonough Steel Co.

Founded January 1st 1924

ENGINEERS - FABRICATED STEEL PRODUCTS

800 - 75th AVENUE OAKLAND 21, CALIFORNIA TRINIDAD 2-3300

260 tons of lamellas

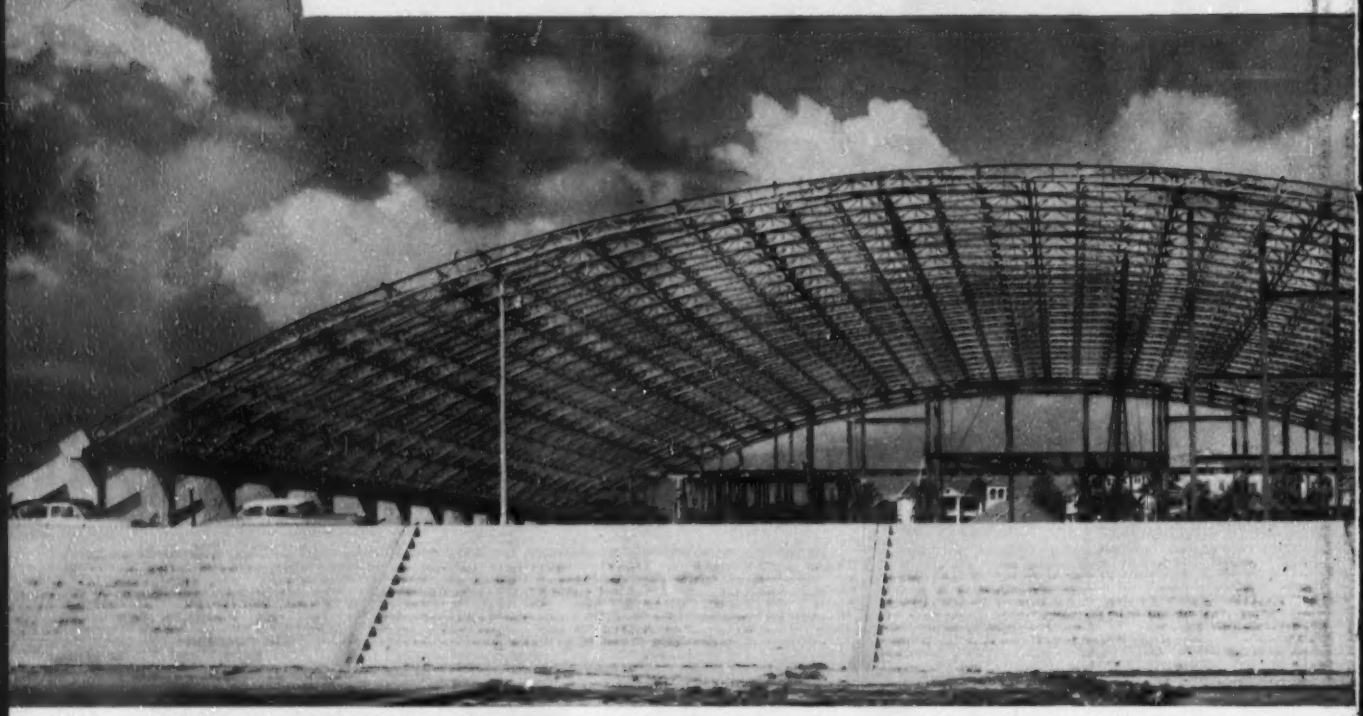

ROOF STRUCTURES OF TEXAS, with offices at Austin and Houston, holds the contract for the auditorium roof. Lamella roof design and details prepared by G. R. Kiewitt and Hale & Harvie, Consulting Engineers, St. Louis. Designers of the foundation and general building work, exclusive of the roof structure, were Blucher and Naismith, Structural Engineers of Corpus Christi. Lamella units fabricated by Columbia Iron Works, St. Louis, and the purlins by Tips Engine Works, Austin. Richard S. Colley is the architect, and Walsh Construction Co., the general contractor—both of Corpus Christi.

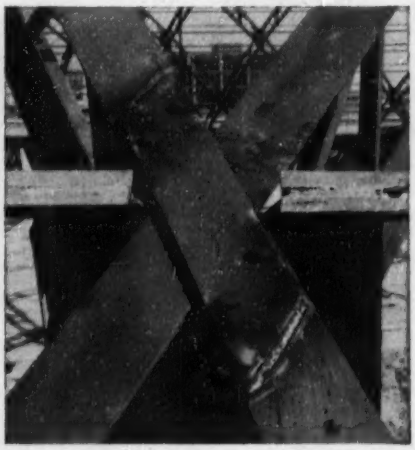

THE ARCHES AND PURLINS are open web members of Structural Steel, 24 in. deep. Except for the high tensile bolts which were used to erect the arches, the framing is all-welded.

LAMELLA CONSTRUCTION—unusual in that the main members span supports on a skew, forming diamond-shaped areas between the intersecting members.

# of USS Structural Steel

erected in 25 days

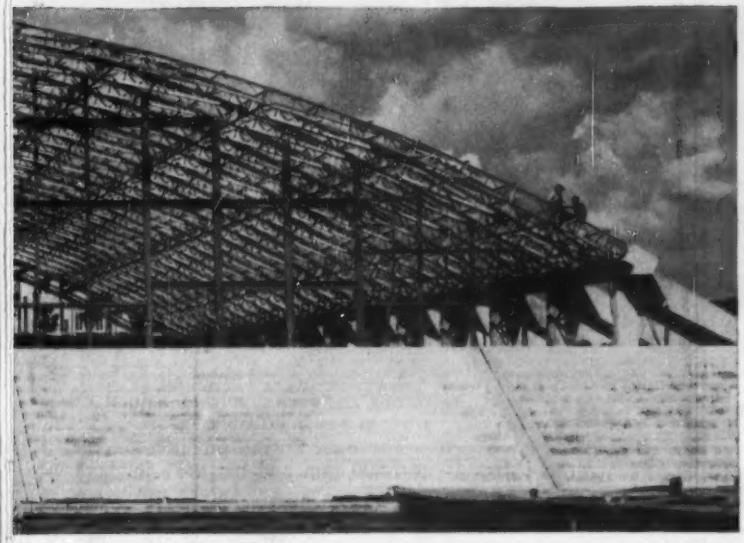

THE MAIN MEMBERS—circular steel arches—spring from concrete buttresses along the sides of the building. They span 224 ft. with a rise of 30 ft., providing a 42 ft. clear height at midspan. Main and intermediate purlins are spaced about 6 ft. apart.

It took just 25 working days for the Gulf Erection Co., of Houston, Texas, to erect 260 tons of structural steel, covering 65,000 sq. ft., for the arched roof of the Municipal Civic Auditorium in Corpus Christi, Texas.

A somewhat unusual type of construction, known as lamella, was used. The main members span the arch on a skew, forming diamond-shaped areas between the intersections. The lamella units were identically fabricated, except for being right and left hand. This, plus the fact that only two types of purlins were required, simplified fabrication and erection considerably. Falsework was necessary only to erect the first few members. The succeeding members were erected with a crane.

This is the type of application in which versatile USS Structural Steel excels. It is extremely tough, yet is the most economical of load-carrying materials. It will withstand more abuse than other structural materials, effectively resisting tension, compression, torsion, and shear. Enclosed in buildings, Structural Steel will last indefinitely—requiring no maintenance. Equally adaptable to riveting, welding or bolting, it can be erected in any weather in which men can work. And because steel members are fabricated indoors, weather can have no effect on the quality of workmanship.

Write today for complete information on construction with steel—United States Steel Corporation, 525 William Penn Place, Room 4535, Pittsburgh 30, Pennsylvania.

UNITED STATES STEEL CORPORATION, PITTSBURGH • COLUMBIA-GENEVA STEEL DIVISION, SAN FRANCISCO
TENNESSEE COAL & IRON DIVISION, FAIRFIELD, ALA. • UNITED STATES STEEL SUPPLY DIVISION, WAREHOUSE DISTRIBUTORS
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

USS STRUCTURAL STEEL

USS

4-474A

UNITED STATES STEEL

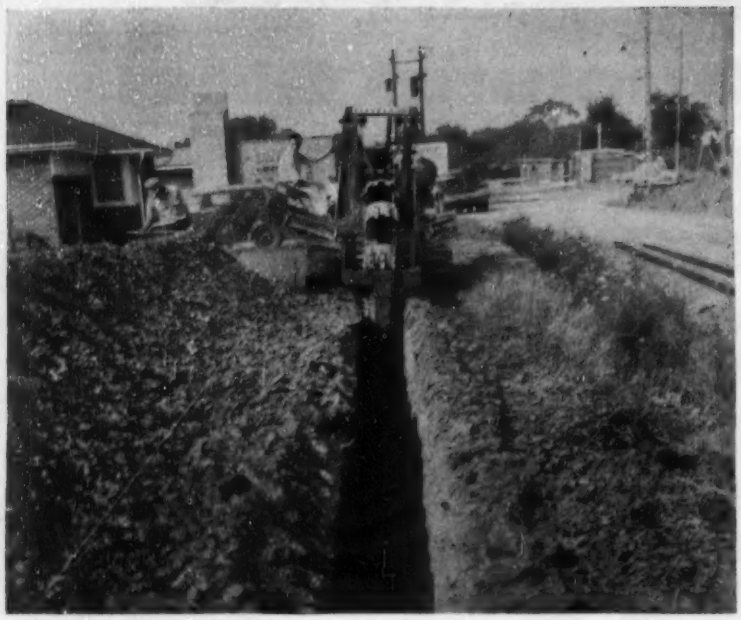

This CLEVELAND

Digs 4 to 5 Jobs Every Day

This "Baby Digger" meets heavy daily schedules of scattered jobs, digs *on time, every time,* hustles safely from job to job at legal limit speeds on a compact Cleveland trailer.

This CLEVELAND

Lays Pipe, Fills Trench, Tamps Fill

The Cleveland "80" (or "80-W")—widely employed in gas distribution construction—saves *money, men and machines.* One-man-operated, it does a faster, safer, cleaner job on *each* of these construction operations.

Write for descriptive bulletins and specifications, or get the full story on CLEVELANDS from your local distributor

THE CLEVELAND TRENCHER COMPANY
20100 ST. CLAIR AVENUE • CLEVELAND 17, OHIO

CLEVELAND

low as possible for adequate tire clearance.

Other features of the new telescopics are: a dumping angle of 42½ to 50 deg; hoist sleeves made from seamless steel of special material; a wide choice of gas tank mounting including outside, inside, or step tank; and three models for every hauling need in the 21 to 30-ton capacity range. THE HEIL CO., MILWAUKEE 1, WIS.

Kohler Offers Six Models Of 15-kw Electric Plant

A new 15-kw gasoline-powered AC electric plant is available in six different models with remote control or stand-by starting, and with varying voltage outputs. The new plant is water cooled with radiator, belt-driven centrifugal pump and blower fan. It features an adjustable jet carburetor with automatic choke and a mechanical fuel pump equipped with oil bath air filter.

A carburetor and valve kit for converting the fuel supply to natural or artificial gas is available.

The 6-cyl engine produces 51 hp at 1,800 rpm and has a 3½ in. bore and 3¾ in. stroke. Intake valves are of chrome nickel and exhaust valves of chrome-silicon; pistons are aluminum alloy. There is a forged steel crankshaft with three main bearings and lubrication is a combination of pressure feed, metered intermittent jet and spray.

Remote starting of the new Kohler plant is accomplished through an on-off switch on the plant or by a two-wire remote control. Stand-by starting, which automatically starts the plant and transfers the load whenever regular service fails, is through an emergency transfer panel with a 75-amp built-in transfer switch. KOHLER CO., KOHLER, WIS.

Downblow Heater Designed With Removable Fan and Motor

A downblow unit heater is now being manufactured with a motor and fan that can be removed from the bottom of the unit and a die-formed full venturi.

The motor mountings are completely separated from the coil and heated air stream and are attached to special rubber mountings in the bottom of the motor well. The design of the well enables the serviceman simply to loosen four bolts in order to drop the well, motor and fan from the unit. However, the design is said

(*Continued on page 68*)

Setting new standards – everywhere...

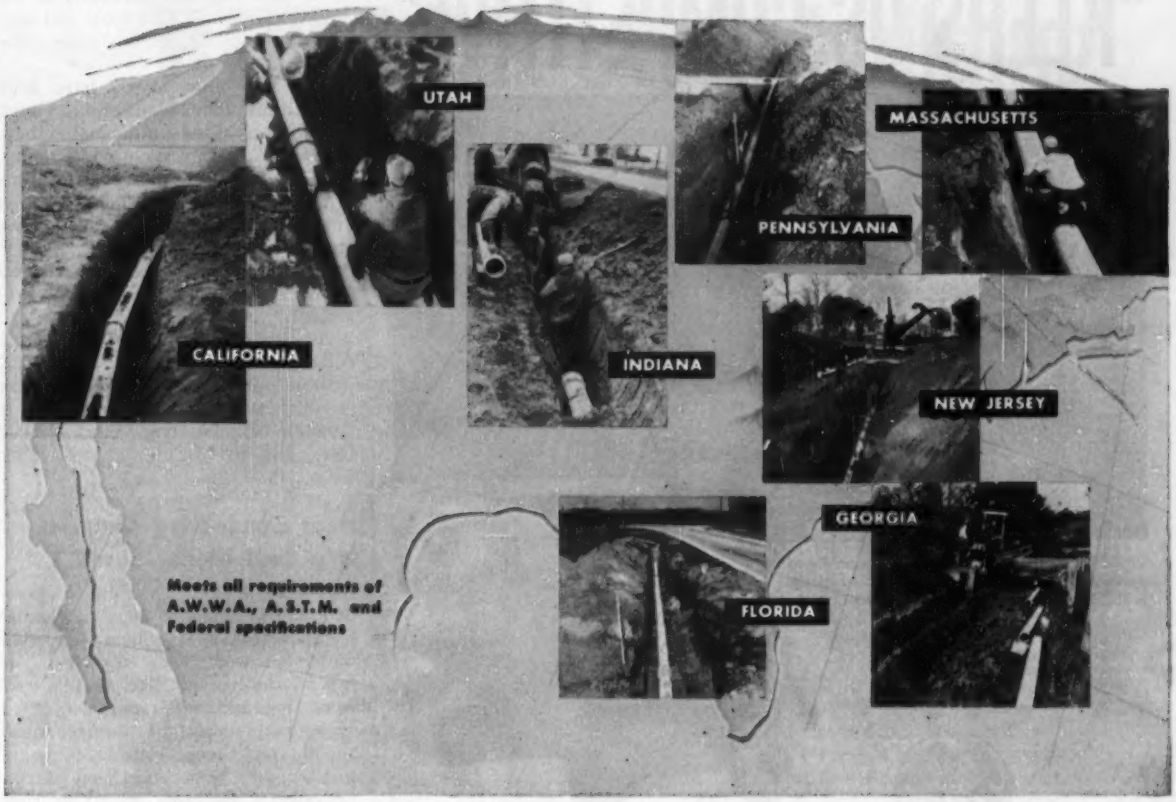

Transite Pressure Pipe and Ring-Tite Coupling speed water line assembly, lower installation cost

IN COMMUNITY after community, proof that Transite® Pressure Pipe and Ring-Tite® Coupling speed water line assembly and cut installation costs is reflected in such contractor comments as these:

"Exceeded by far, the speed anticipated under job conditions."

"Based bid on 400 feet a day, actually laid over 700 feet."

"Established an entirely new concept of installation savings."

These new records for speedy installation have been accomplished despite adverse terrain, weather conditions and the presence of muck and mud in many of these locations. That is why, whatever your water line problem it will pay you to learn all about Transite's many advantages.

* * *

Write for the new Transite Brochure, TR-142-A, Johns-Manville, Box 60, New York 16, N. Y.

Johns-Manville TRANSITE PRESSURE PIPE

THE ASBESTOS CEMENT PIPE WITH THE NEW RING-TITE COUPLING

G-E 2-WAY RADIO "KEEPS US COMPETITIVE"

VICE-PRESIDENT, J. C. GARRISON, maintains close supervision over his firm's activities. G-E radio equipment is his "most reliable foreman on every job"!

ALL TRUCKS UNDER CONTROL. "Our dispatcher is the key man in an efficient operation. He times deliveries, issues change orders, if necessary, and even expedites mechanical repairs for competitive company equipment!"

2-WAY MOBILE RADIO

FREQUENCY STABILITY & SELECTIVITY guaranteed for life!

● **TO STAY COMPETITIVE** in the construction business today, dependable radio communication is essential. Greenville Concrete Company of South Carolina has proved that point many times during the last four years. It offers an ideal solution to perfect timing of concrete deliveries. Any delay in unloading is instantly covered with a radio request for re-routing instructions. Every construction vehicle equipped with *G-E radio* does a *better job . . . does it faster . . .* and *at less expense.* That's how your profit gets a boost!

Investigate General Electric mobile radio today . . . apply its multiple benefits to your construction activity. Why not call our Communications Counselor at a local office or mail the coupon below.

SEND FOR FREE INFORMATION!

General Electric Company, Section X22124-9
Electronics Park, Syracuse, New York
Please send bulletin ECR-47 showing how General Electric 2-way radio can aid me in the construction business!

NAME ..... COMPANY .....

ADDRESS .....

CITY ..... STATE .....

GENERAL ELECTRIC

to be such that the possibility of the assembly working itself loose and accidentally dropping out has been eliminated.

The new unit heaters have been grouped into four classifications. Quietness level for Class I units makes them suitable for courtrooms, classrooms, hospitals, private offices and theaters. Class II units can be installed in hotel dining rooms, show rooms, small stores and similar places. Class III and IV units are designed for use where relatively higher noise levels can be tolerated.

Available in both one and two-row coils, the downblow heater can be had with outputs ranging from 40,000 Btu to 580,000 Btu. UNION ASBESTOS & RUBBER CO., HEATING AND COOLING DIV., 332 S. MICHIGAN AVE., CHICAGO, ILL.

Heat Conducting Material Is a Real Money Saver

A ready-to-apply mixture of powders and a liquid to form a thermal conducting material is being marketed under the trade name of Tracit. It is a mortar-like material that is self-hardening, and, when set, is reported to be highly resistant to mechanical and thermal shock. Further, it is said to have good heat conduction properties and is therefore useful in conducting heat between surfaces, usually irregular in shape.

Tracit is adhesive and may be applied to surfaces by hand or with a trowel. After setting by drying, either in air or forced drying, the material bonds to the surface.

One use of the Tracit is its application over traced pipe, valves or equipment where it is desirable to maintain a constant temperature by the addition or subtraction of heat. In this use, it is found to be an alternate to the more expensive method of jacketing.

For instance, the jacket on a 1 or 1½ in. stainless steel jacketed valve cost approximately $150. Tracing tubing for steam, Dowtherm, hot or chilled water, etc., and Tacit will cost less than $15 applied. The reported savings are high and the heating characteristics are said to be very comparable.

Because of its heat transfer qualities and high compressive strength, Tracit is recommended for the floors of radiant heated homes or plants where good distribution of the heat in the tubing is desired. CHEMAX MANUFACTURING CORPORATION, 900 WILMINGTON RD., NEW CASTLE, DELAWARE.

You can do all this with a

BUTLER steel building



Complete it in half the time—
Half-finished at the factory—with precision die-formed and punched cover panels—a Butler building goes up fast. It simply bolts together.

Expand it economically while in use—
Move out walls and bolt in new sections with less than half the usual delay and mess—and without loss of materials. Costs less too!



Move it quickly and conveniently—
Yes . . . move it, with 100% salvage of the original materials! Simply remove bolts, transport sections to new site, and re-assemble.



Finish it to any degree of beauty—
Your Butler dealer will build to meet the needs of your business—install decorations, masonry front, offices, interior finish, etc.

Modify it to any use—
Need an attractive store or dealership, loading dock, hoists or monorails? Your Butler dealer will plan and install what you need.

Use it in any climate—
Designed to seal tight—and precision made—a Butler building is storm-proof. Easily insulated against tropic or arctic weather.

...*and buy it for* LESS *than a conventional building!*

Yes, Butler's modern engineering and mass production have created a modern building that saves you money right down the line—on erection, materials and maintenance costs. Investigate Butler before you buy. Why not start now by mailing coupon below for free catalog.

BUTLER

BUTLER MANUFACTURING COMPANY

Manufacturers of Oil Equipment • Steel Buildings
Farm Equipment • Dry Cleaners Equipment
Special Products

Factories at Kansas City, Mo. • Galesburg, Ill. • Minneapolis, Minn.
Richmond, Calif. • Birmingham, Ala. • Houston, Texas

For prompt reply, address office nearest you:
BUTLER MANUFACTURING COMPANY
7418 East 13th Street, Kansas City 26, Missouri
918 Sixth Avenue, S.E., Minneapolis 14, Minnesota
1028 Avenue W, Ensley, Birmingham 8, Alabama
Dept. 18, Richmond, California

Please send me name of my nearest Butler dealer and also your free folder on new Butler Panl-Frame steel buildings.

Name_____
Firm_____
Address_____
City_____ Zone____ State_____

CONOCO

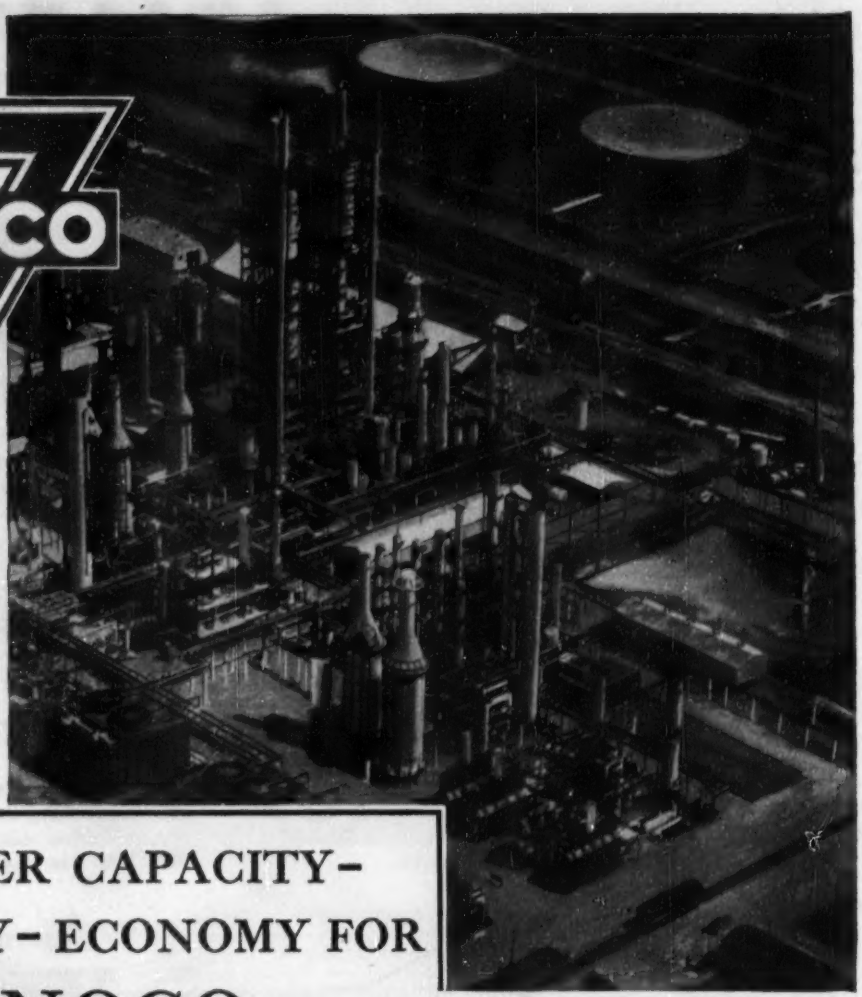

New installations recently placed in operation at Lake Charles, include units for crude oil distillation, catalytic cracker feed preparation, Thermofor catalytic cracking, gas recovery, catalytic polymerization, catalytic reformer feed preparation and aromatics extraction.

GREATER CAPACITY– EFFICIENCY– ECONOMY FOR CONOCO

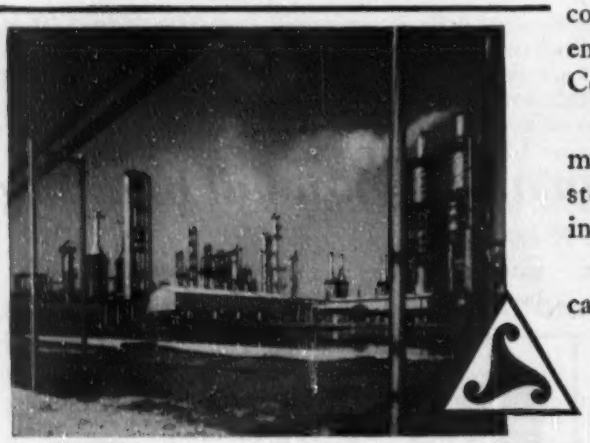

For Continental Oil Company, Stone & Webster Engineering Corporation designed and constructed seven types of process units and enlarged an existing alkylation unit at the Company's Lake Charles, Louisiana, refinery.

Continuous flow through several of the units minimizes the need for intermediate offsite storage facilities; and all units are closely integrated for high heat economy.

These new units more than tripled the capacity of the refinery.

Write or call us for detailed information as to how our engineering, design, construction, report and appraisal services may be of assistance to you.

STONE & WEBSTER ENGINEERING CORPORATION

BADGER PROCESS DIVISION

AFFILIATED WITH E. B. BADGER & SONS LIMITED (LONDON)

New York Boston Chicago Pittsburgh Houston San Francisco Los Angeles Toronto

NEW PRODUCTS

Bituminous distributors—A new 6-page bulletin has been published, No. 54-3, which illustrates the company's line of bituminous distributors. Rosco Mfg. Co., 3118 Snelling Ave., Minneapolis 6, Minn.

Wrought iron pipe—"Piping for Permanence" is the title of a 32-page bulletin containing technical data based on an analysis of piping systems in which wrought iron is specified to help solve corrosion problems. Sections are devoted to a round-up of wrought iron pipe installations, a review of piping properties, descriptions of individual service in building-piping systems and recommendations to help reduce the rate and severity of corrosion. Also included in the bulletin is an 11-page chapter that deals exclusively with water analysis and treatment. Engineering Service Dept., A. M. Byers Co., Pittsburgh, Pa.

Cranes—A 12-page catalog illustrates and describes the Lorain 42 Series. Highlighted in the booklet are the design features of the line and a section is devoted to the Moto-Shovel, Moto-Hoe, Moto-Clamshell, and Moto-Dragline. Another section gives special emphasis to the crane boom and its equipment. Numerous on-the-job pictures appear throughout the booklet. Thew Shovel Co., Lorain, Ohio.

Scale models—Scale models, their application and manufacture, are described in a new 4-page brochure. Models of any product, prototype design, or piece of equipment are made to user specifications to aid in development and research work, plant layout, construction estimating, etc. The booklet illustrates a number of models produced by the company. Booklet K. Arthur B. Johnson & Co., Inc., 392 E. 201st St., New York 58, N. Y.

Concrete pressure pipe—A 24-page booklet, "The Story of Concrete Pressure Pipe," deals with the history of concrete in water lines and its present application in prestressed concrete pressure pipe. There are 14 sections. One of them "How Prestressing Works" shows with simple drawings the principles of tension and compression in the pipe and how prestressing makes possible near "zero" compression with the water line operating at design pressure. The catalog section lists and illustrates types of the company's pressure pipe for water

(*Continued on page 72*)

MAIL COUPON for complete data on doors for all industrial and aviation needs
INTERNATIONAL STEEL COMPANY
2010 Edgar Street, Evansville 7, Indiana
Send me without obligation my personal copy of the new International Manual, "Doors for Industry and Aviation":
NAME AND POSITION
FIRM
ADDRESS
CITY ZONE STATE

Some of the 126 new-design vertical-lift doors serving PIER NUMBER 57 Foot West 15th and North River, New York, N. Y.
Dept. of Marine and Aviation City of New York — Owners
MADIGAN & HYLAND, Long Island City, N. Y.: Architects and Engineers
CORBETTA CONSTRUCTION CO., New York, N.Y.: General Contractors for Superstructure
INTERNATIONAL STEEL CO.: Fabricators and Erectors

INTERNATIONAL
NEW-DESIGN DOORS

ADD A NEW ANGLE

that adds storage plus protection

Close-up of International-built doors at Pier No. 57. Note "nesting" of leaves when doors are opened—also the protective barrier formed by a 4-ft. section of the lowermost leaves of upper-deck doors.

SEE COMPLETE CATALOG IN SWEET'S ARCHITECTURAL FILE

You're looking at New York's first new pier since World War II — also the first important advance in industrial door design that's been made in many a year.

It's another innovation by International: Doors that operate in parallel guides . . . each leaf sliding upward in its own angled guide . . . with all leaves finally nesting vertically within the structure's framework. And it's this vertical versatility that offers every plant, warehouse, pier, or factory these three added advantages:

1. Doors open up-and-out-of-the-way — not horizontally into the storage area — thus permitting storage right up to the door and above the door level.
2. Inner-structure nesting of opened door's leaves eliminates interference with fire protection provided by sprinkler systems.
3. Permits unobstructed interior lighting when leaves are opened.

International engineers pooled their broad experience with the engineers of the Dept. of Marine and Aviation and Madigan & Hyland to give New York's newest Pier No. 57 these new-design doors. They'll welcome the chance to help you plan applications for your special needs — or to work with you on any door project. Mail coupon for comprehensive data on International's unique door service.

INTERNATIONAL SERVICE

2010 EDGAR STREET, EVANSVILLE 7, INDIANA

INTERNATIONAL STEEL COMPANY

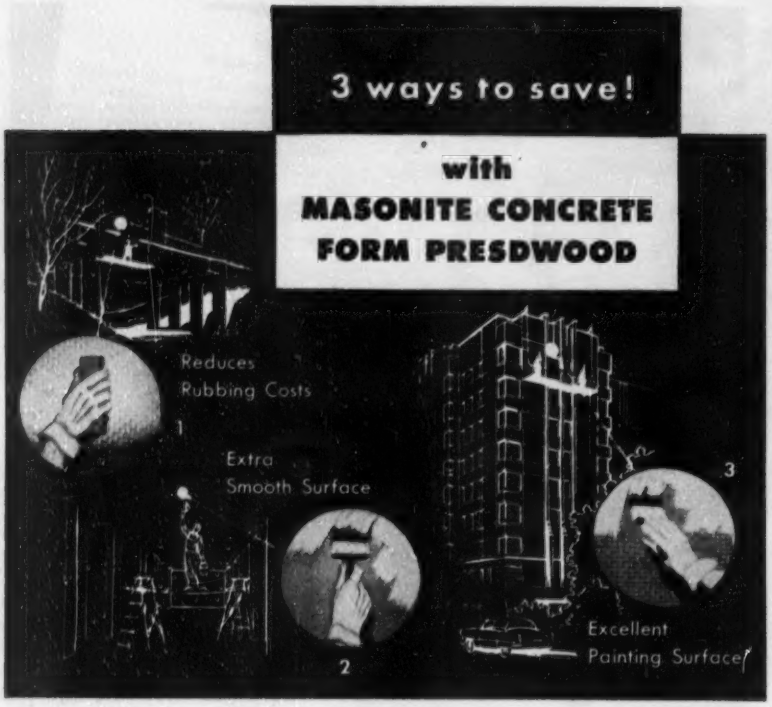

Cut costs on your very next job!

1. ***Screen side to concrete*—for even-textured surfaces**
   You'll cut hand-rubbing costs as much as 50% when you pour against the screen side of Masonite Concrete Form Presdwood®. The tiny projections left on the concrete surface help the worker get an even-textured surface with less rubbing—at lower costs.
2. ***Smooth side to concrete*—for painted or unpainted concrete**
   A smooth, even surface that needs almost no rubbing! No knots, grain marks or other blemishes are transferred off these strong, all wood hardboard panels. Simply smooth off the small fins at the joints and you're ready to paint—if painting is specified.
3. ***Screen side to concrete*—for painted surfaces**
   Do the specifications call for architectural concrete, and painting? Pour concrete against the screen surface and you'll get an extraordinarily good bonding surface for paint. Only minimum of *rubbing required*.

Plus these Extra Advantages!

- Low first cost...about ½ that of other smooth-surface materials.
- Never splits, splinters or cracks.
- Easily worked with carpentry tools.
- Can be curved for arches, columns, etc.
- Large 4' x 8' and 4' x 12' panels are easy to handle, create fewer fins!

Free booklet!



NATURALLY STRONGER WITH LIGNIN
PRESDWOOD WOOD MADE BETTER
MASONITE® CORPORATION
Dept. ENR-129, Box 777, Chicago 90, Illinois

Please send me a sample and your booklet on Concrete Form Presdwood.

Name.....
Firm.....
Address.....
Town.....Zone.....
County.....State.....

"Masonite" signifies that Masonite Corporation is the source of the product

transmission and distribution lines, subaqueous intakes and outfalls and sewage force mains. Included are cutaway drawings of each type of pipe with sizes, weights and normal operating heads. PRICE BROS. CO., 1932 E. MONUMENT AVE., DAYTON 1, OHIO.

Steel roof deck—Specifications for Milcor steel roof deck and installation data are covered in a new catalog. Features include: a safe loading table, suggested architects' specifications, welding and insulation procedures, roof deck accessories, application details and the use of the roof deck for floor forms. Catalog No. 240. INLAND STEEL PRODUCTS CO., 4057 W. BURNHAM ST., MILWAUKEE 1, WIS.

Grader operation—An instructive 20-page booklet on how to operate a motor grader is now available. While the booklet is especially pertinent to Galion grader owners and operators, much of the instructive material is applicable to training programs for improving the skill of grader operators generally. Done in a comic book style, the booklet covers the hydraulic control system, steering, tips on leaning the front wheels, proper positioning of the blade, moldboard pitch adjustments, reverse blading, bank sloping, ditching, road maintenance, turning the grader around, correct use of gear speeds, snow removal, etc. THE GALION IRON WORKS & MFG. CO., GALION, OHIO.

Hand torches—A new 36-page catalog covers the manufacturer's line of torches and tips for oxyacetylene cutting and welding. Each standard torch and tip is listed along with the necessary mixers, extensions, adapters and accessories that are used with the torches. The information is presented through illustrations, charts and descriptions. Catalog ADC 702B. AIR REDUCTION SALES CO., 60 E. 42ND ST., NEW YORK 17, N. Y.

Concrete forms—Concrete forms, concrete form ties and concrete accessories are illustrated and described in Catalog No. 160. A quick reference concrete form tie selection guide is designed to aid contractors in selecting the proper form tie to meet working load specifications. Another feature of the catalog is a form design chart and formula for developing stud, wale and tie spacings. Reinforcing bar supports and road dowel bar supports are also included in the 26-page booklet. UNIVERSAL FORM CLAMP CO., 1238 N. KOSTNER AVE., CHICAGO, ILL.

Fenestra 50 YEARS OF BUILDING PRODUCT LEADERSHIP

*"A salute to those who made it possible"**

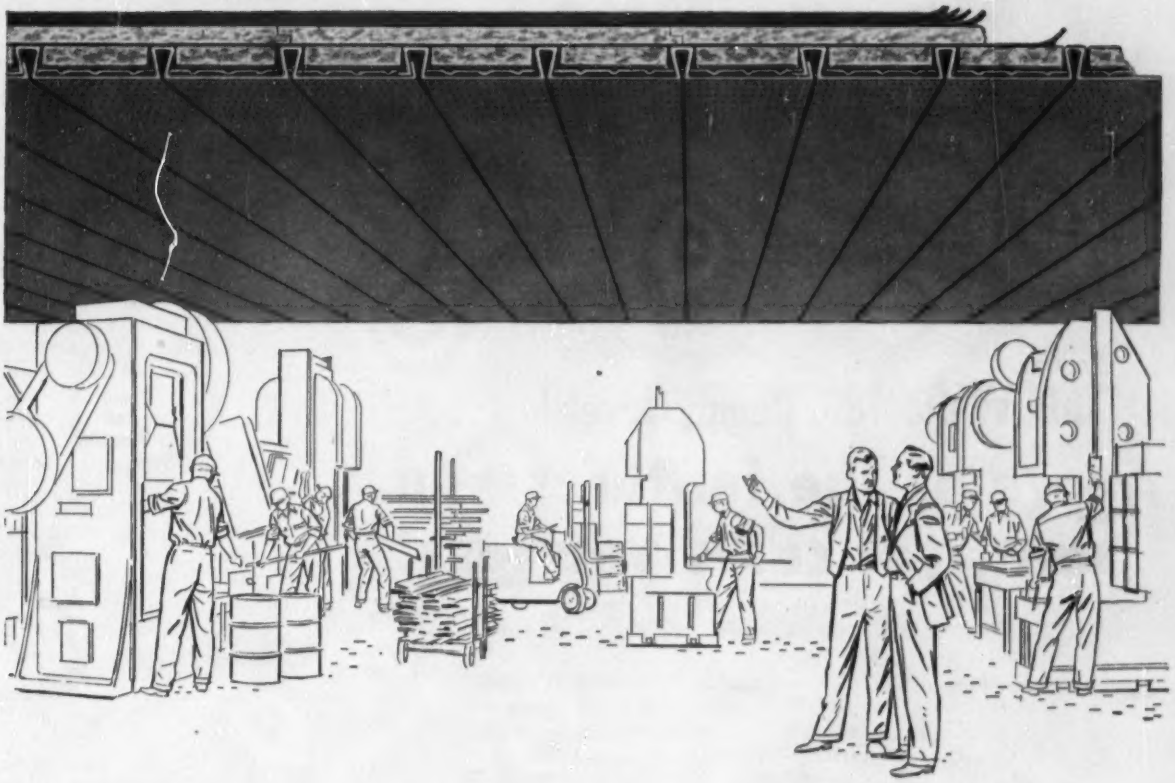

SILENCE IS REALLY GOLDEN . . . HERE!

Noise, NOISE, NOISE. Nagging, hammering, screeching, deafening. In plant after plant, workers complain, work lags, men stay home until their heads stop ringing. Industrial noise causes a reported *$4,000,000*-a-day loss in worker efficiency.

But there's an answer—in a new *Fenestra** building idea: A combination acoustical-structural roof that costs as little as 75 cents per square foot . . . installed.

In one compact unit you get: (1) perforated light-gauge Fenestra Holorib Steel Deck which provides a smooth-finished, metal-faced interior ceiling; (2) sound-absorbing element which is also efficient heat insulation; (3) strong steel surface for support of rigid fiberboard insulation and finished roofing.

Holorib is lightweight. It saves you building time, labor, materials and money. It's practically maintenance free. But you *can* wash it or paint it time and time again without hurting its acoustical efficiency a bit. And, it's *noncombustible!*

General Motors Technical Center, Warren, Michigan; Standard Pressed Steel Company, Jenkintown, Pa.; Simmons Saw & File Company, Fitchburg, Massachusetts . . . these are just a few of the companies taking advantage of this great Fenestra development.

Write us for complete information—or have your architect write—and check on Fenestra floor panels and wall panels. Fenestra Metal Building Panels speed building and cut costs because they are a multi-purpose building material. Write Detroit Steel Products Company, Dept. ER-12, 2286 E. Grand Blvd., Detroit 11, Michigan.

*Trademark

* Your need for a practical way to make a factory quieter encouraged us to develop Fenestra Acoustical Holorib.

Fenestra | METAL BUILDING PANELS

Here are important facts for the "man behind the gun"

This White 18" Dumpy level has...

more of the features you want, yet costs you less!

BEFORE you buy, compare this White Dumpy level with a similar model of any other recognized make. From every standpoint — design detail . . . quality construction . . . work-speeding, life-lengthening features and cost — you'll quickly see why a White's the best buy you can make. It will make your work faster, easier, more accurate. Check this comparison chart:

FEATURES	D. White No. 7080	Instrument A	Instrument B
Magnifying power of telescope	35X	30X	27X
Distance away you can read 1/100 ft. graduation	1200 ft.	1050 ft.	900 ft.
Diameter of objective lens	1.81 in.	1.485 in.	1.69 in.
Field of view (in minutes of arc)	64′	52′	60′
Coated optics	YES	YES	YES
Covered leveling screws	YES	YES	YES
Can you easily replace worn leveling screws in the field?	YES	NO	YES
Sensitivity of level vial (in seconds of arc per 2mm of graduation)	20"	20"	25"
Price — complete with carrying case, tripod and accessories — F.O.B. factory	$295.00*	higher	higher

*Price subject to change without notice.

For complete details on the 18-in. Dumpy level and other equally fine engineering instruments, see your David White dealer, or write direct to DAVID WHITE CO., 315 W. Court Street, Milwaukee 12, Wisconsin.

DAVID WHITE COMPANY

We offer complete, expert repair service on all makes, all types of instruments

LEGAL

When work must be done to satisfaction of owner

Where a contract provides work must be done to the owner's satisfaction, that does not mean that the owner can arbitrarily reject work properly performed. In a recent case,[1] the court stated: "The contract in the Gerling case being one in which performance was conditioned on the satisfaction of the owner, the test of adequate performance was not whether the owner ought to have been satisfied but whether she was satisfied. Singerly v. Thayer, 108 Pa. 291, A A. 230; Burke v. Daughters of Most Holy Redeemer, Inc., 344 Pa. 597,581, 26 A. 2d 460; Ehrlich v. United States Fidelity and Guaranty Company, 356 Pa. 417, 429, 51 A. 2d 794. There are, however, two limitations inherent in this principle: (1) the dissatisfaction must be genuine and not prompted by caprice or bad faith, and (2) if the work is not sufficiently completed for a reasonable determination whether it was or would be satisfactory, then the rejection was premature. Singerly v. Thayer, 108 Pa. 291, 2 A. 230; Schleicher v. United Security Life Insurance Company, 191 Pa. 477, 43 A. 380."

In the above case a contractor was employed to repair and remodel some farm houses. Before he had completed the work, the owner discharged him and employed another contractor to complete the work. The owner then discharged the second contractor, on the same grounds that she had discharged the first contractor, namely, that the work was not being done to her satisfaction. Then a third contractor was employed, who subsequently was also discharged for the same reason.

The contractors brought actions to recover for work done; the owner counterclaimed for money paid the contractors, claiming that since the work was not done to her satisfaction, she was entitled to a return of the money she had paid to the contractors.

The court found in favor of the contractors and against the owner.[1] While it was true that the contractors had not substantially performed their contracts, they were discharged without being given an opportunity to remedy the alleged defects. In fact, some of the contractors were discharged without even being notified that the owner claimed the work was not being done to her satisfaction.

(1) Hood et al. v. Meingerel et al., 105 A. 2d 126, Supreme Court of Pennsylvania, May 24, 1954.

LOOK NO HANDS!

BUTLER CONCRETE PLANTS APPROACH ROBOT AUTOMATION

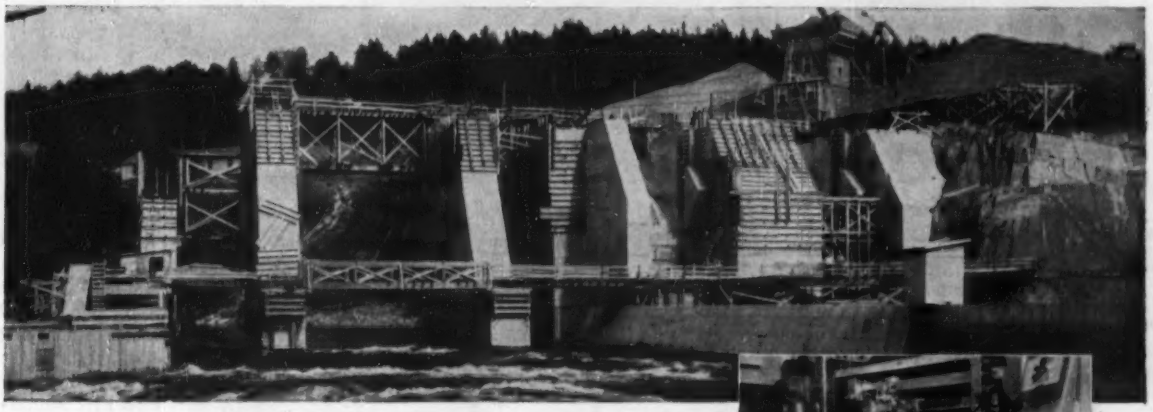

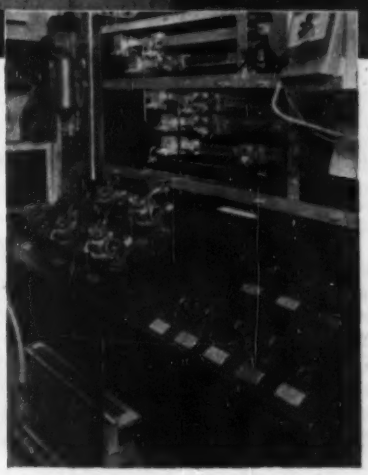

Top — Butler Central Mixing Plant on New Brunswick Dam job. One of many Butler Plants used on Canada's huge hydro-electric expansion.

Below — Butler push-button control with air operated aggregate filling and discharge gates provide labor-saving assurance of uniform batch quality.

In manufacturing industries, the goal is complete automation. No human handling of materials, no humans on machines. Raw materials to finished, packaged product without the chance of human error.

And in BUTLER PLANTS that goal has virtually been achieved. For example, a BUTLER PLANT in South Carolina provides bin signals automatically interlocked with turnhead and tunnel gates. Materials supply is *always* maintained.

And BUTLER *automatic* aggregate and cement batching is already widely and profitably used. Push button remote control can be provided in a distant dispatchers office . . . Profitable time saving . . . profitable labor saving — and an *electronic* brain never forgets.

In your new BUTLER CONCRETE PLANT let the Butler Engineer design it for maximum automation. In your present Plant call in the Butler Engineer to *install* automation at the level most profitably suited for your production and your market.

BUTLER BIN CO.

947 Blackstone Ave.
WAUKESHA, WISCONSIN

A run on the bank

. . . only our Hartford Contractors' Equipment Policy saved us from a heavy loss

(Based on Company File #47848)

We were excavating for a cellar. It was at a lakefront site on the top of a steep, rocky slope.

When Al backed the shovel, he didn't realize how close he was to the edge of the bank. The machine teetered at the top—and took off downhill!

Slipping over flat rocks, it picked up speed. Al couldn't stop. And it was too dangerous to try turning. He jumped just as the rig wound up in the lake.

It cost $350 to haul the shovel out. And $750 for repairs. We'd have been out of pocket $1,100—except for our Hartford Contractors' Equipment policy. It took care of both bills.

In the construction business, you never know when an accident may "sink" one of your expensive machines.

But you should know—beforehand—who's going to make good the loss. Don't let it be *you*.

A Hartford Contractors' Equipment policy covers your machines against losses caused by fire, theft, explosion, collision, overturn, windstorm, landslide, bridge collapse and many other hazards. And it covers them wherever they happen to be. On the job. In transit. In storage.

Get the full story. Call your Hartford Fire Insurance Company Agent or your insurance broker today. Have him outline a sound program of protection for *your* machines.

Year in and year out you'll do well with the

Hartford

Hartford Fire Insurance Company • Hartford Accident and Indemnity Company
Hartford Live Stock Insurance Company • *Hartford 15, Connecticut*

OBITUARIES

Clinton B. White, 67, a retired contractor of Rochester, N. Y., died Nov. 22.

Oscar H. Nelson, 69, cartographic technician who worked more than 47 years for the Geological Survey, died Nov. 23 in Washington, D. C. He received his civil engineering degree from the University of Wisconsin. His first job with the survey was as a levelman and traversman at Leavenworth, Kans. In 1942 he became senior cartographic engineer in the Washington office and later was named chief of the cartographic section.

Adam Reid, 73, former building contractor of Poughkeepsie, N. Y., died Nov. 23. He retired two years ago.

E. James Fucik, 74, authority on the design and construction of river and harbor works on the Great Lakes, died Sept. 28 in Evanston, Ill. A 1901 graduate in civil engineering from the University of Illinois, he served 18 years with Great Lakes Dredge & Dock Co., and 17 years with Fitz Simons & Connel Dredge & Dock Co. Until retirement in 1943. He was a vice-president and director in both companies.

Louis M. Gerhardt, 54, civil engineer, designer and project coordinator of a number of Eastman Kodak Co. buildings in Rochester, N. Y., died Nov. 10.

Charles F. Evans, 73, for many years a building contractor in Erie, Pa., died Nov. 12.

Harold N. Cross, 73, one-time city engineer at Haverhill, Mass., and for 35 years employed by Factory Mutual Insurance Co. of Boston, died Nov. 11. He was in charge of construction of the first tunnel under the Hudson River, and served as chief engineer in charge of the Yellowstone River irrigation project in Montana.

Maj. Gen. Albert C. Lieber, 59, former commanding officer of the Engineer Replacement Training Center at Fort Belvoir, Va., died Nov. 9. He had been serving as post commander at Ft. Leonard Wood, Mo. From 1938 until 1940 he was in charge of field studies and laboratory research in the office of the chief of engineers, Washington, D. C. In 1941 he was made district engineer for construction of communication routes for movement of lend-lease supplies in Iraq, Iran and adjacent areas.

REINFORCED CONCRETE

chosen for CHICAGO's nine new parking garages

Each of the nine parking garages in Chicago's new $50,000,000 program to provide adequate parking facilities will be built of reinforced concrete. Every one of the nine architectural firms involved selected reinforced concrete. It provides greater economy, inherent fireproof qualities, weather resistance, design adaptability, attractive appearance, low maintenance costs, and availability of materials. On *your* next job, too . . . design for reinforced concrete.

Graham, Anderson, Probst and White, Architects

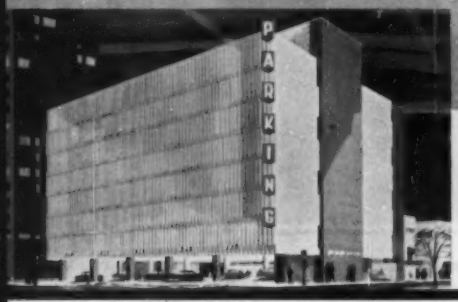

Loebl, Schlossman and Bennett, Architects

Shaw, Metz and Dolio, Architects

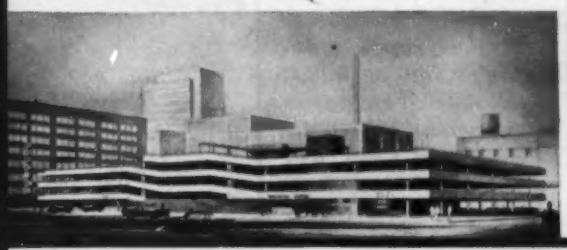

Everett F. Quinn and Associates, Architects

Schmidt, Garden and Erickson, Architects

Naess and Murphy, Architects



Holabird and Root and Burgee, Architects

Friedman, Alschuler and Sincere, Architects

McClurg, Shoemaker and McClurg, Architects

CONSULTING ENGINEERS:
De Leuw, Cather & Co.

CHICAGO DEPARTMENT OF PUBLIC WORKS:
George Dement, Commissioner
Dick Van Gorp, Chief Engineer
M. J. Glicken, Architect

38 South Dearborn Street • Chicago 3, Illinois

CONCRETE REINFORCING STEEL INSTITUTE

Areas in transition *from residential to industrial . . .* NEED VITRIFIED CLAY PIPE

Large-diameter Clay Pipe is solving the sewage problems of this Detroit neighborhood, which is rapidly developing into an industrial center. The project was financed by the McLouth Steel Corp. and designed by the Engineering Department of the City of Detroit. City Engineer George Thompson and Sanitary Engineer Clyde Palmer directed the planning. George A. Odium is the contractor.

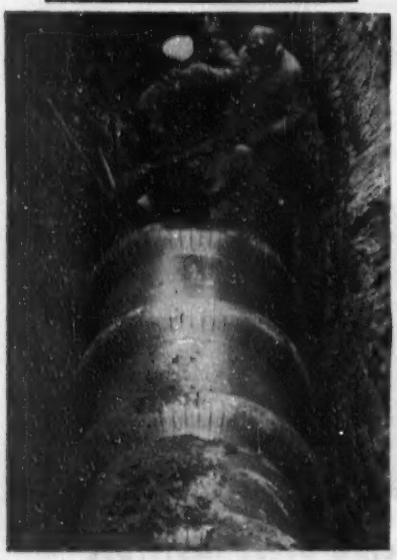

Clay Pipe is the *safe* pipe for sewerage lines that carry both residential and industrial wastes. Clay Pipe permits unlimited industrial expansion—because it handles any concentration of corrosive chemicals that future growth may bring. It protects residents from danger of epidemics and disease... is unaffected by acids and gases formed from any mixture of wastes in the line. It *never* wears out. The manufacturers of Vitrified Clay Pipe cooperate to make this fine product even better through research and testing. You can be sure you're getting the latest and best when you use Vitrified Clay Pipe.

Vitrified
CLAY
CLAY PIPE NEVER WEARS OUT!
PIPE

National Clay Pipe Manufacturers, Inc.
1520 18th St. N.W., Washington 6, D. C.
311 High Long Bldg., 5 E. Long St., Columbus 15, O.
703 Ninth & Hill Bldg., Los Angeles 15, Calif.
100 N. LaSalle St., Rm. 2100, Chicago 2, Ill.
206 Connally Bldg., Atlanta 3, Ga.

C-484-1

MATERIALS AND LABOR PRICES

Market quotations on construction materials and wage rates reported monthly by ENR correspondents
January Materials, and Labor Prices, will appear in January 6, 1955 issue

CEMENT, AGGREGATE, READY-MIXED CONCRETE—F. O. B. CITY

	PORTLAND CEMENT* Per bbl. C/L lots cash, dis. not deducted			SAND AND GRAVEL Per ton, carload lots Gravel,	Gravel,		CRUSHED STONE Per ton, carload lots		CRUSHED SLAG Per ton, carload lots, f.o.b. plant		CONCRETE BLOCK 8 x 8 x 16-in.: truckload del.: per block		CONCRETE Ready Mixed 1:2:4: over.
	Paper	Bulk	Mortar	1½ in.	¾ in.	Sand	1½ in.	¾ in.	1½ in.	¾ in.	Sand grav.	Lt. wgt. agg.	50 c.y., del.
Atlanta	$3.87	$3.56	$3.40	$2.075	$2.075	$1.83	$2.20	$2.20	$1.99	$1.99	$0.21	$0.21	$12.06
Baltimore	3.90	3.60	3.53	2.60‡a	2.60‡a	2.00‡a	2.75‡a	2.80‡a	2.65‡a	2.60‡a	.17	.17a	11.45
Birmingham	3.62	2.75c	....	2.53n	2.53n	2.08n	2.75	2.75	1.95	1.45	.165	.165	11.00
Boston	4.22	3.96	3.96	2.50a	2.50a	2.50a	1.50a	1.60a	.....	.....	.215	.245a	12.50A
Chicago	3.63	3.32	3.35	3.25‡b	3.25‡b	3.65‡b	3.25‡b	3.25‡b	2.25‡	2.25‡	.23	.23b	12.00
Cincinnati	3.85	3.55	3.63	2.10‡c	2.24‡c	2.24‡c	2.54‡c	2.54‡c	.....	.....	.205	.225a	10.95
Cleveland	N. A. in C. L.	3.19e	....	2.05f	1.85f	1.65	4.10‡a	4.10‡a	3.35‡	3.15‡	.....	.22	14.40d
Dallas	3.15	2.85	2.90	2.18	2.28	1.84	2.22	2.38	.....	.....	.11e	.2675	9.40
Denver	4.24	3.94	4.24	1.85	2.00	1.20	.....	.....	.....	.....	.23	.255a	15.50
Detroit	3.72	3.17	3.50	4.50‡b	4.50‡b	4.00‡b	3.75‡	3.75‡	4.25‡	4.25‡	.21	.21a	12.70f
Kansas City	3.67	3.47	3.48	1.85‡	1.85‡	1.50‡a	2.00‡a	2.00‡a	.....	.....	.22a	.24c	12.75b
Los Angeles	4.72a	4.26a	5.20	2.21a	2.41a	2.21a	2.16a	2.26a	.....	.....	.135/m	.345m	11.88lA
Minneapolis	4.10k	3.79k	3.71	2.70‡ag	2.70‡ag	1.60‡ag	3.25‡ag	3.25‡ag	.....	.....	.19i	.....	13.25f
Montreal	3.16ac	2.96ac	....	3.00o	3.00o	2.25	1.65ij	1.90ij	.....	.....	.20	.20a	10.55ok
New Orleans	3.50	3.17	3.48	2.44	2.44	2.00	....	....	1.45	1.65	.275	.....	12.90
New York	4.01	3.70	3.53	2.855k	2.855k	1.905k	2.705l	2.705l	.....	.....	.....	.....	14.05acn
Philadelphia	3.58/3.97‡	3.27/3.64‡	3.58/3.63‡	2.75‡*p	2.75‡*p	2.15‡**	2.30‡	2.40‡	2.00	1.90	.22/.25	.....	12.80**
Pittsburgh	3.62	3.34	3.62	2.25‡	2.25‡	2.20‡	2.60‡	2.60‡	2.15	2.15	.22d	.28	13.00
St. Louis	3.55/3.78b	3.25/3.51b	3.40/3.57	3.10am	2.90am	2.30/2.90am	1.60j	1.70j	1.50	1.50	.22	.28ei	11.90
San Francisco	3.67	3.27	....	2.07	2.07	2.17	2.22	2.22	.....	.....	.....	.28ei	12.15a
Seattle	4.80a	3.55a	5.95A	3.50‡bm	3.50‡bm	3.50‡bm	4.00‡bm	4.00‡bm	.....	.....	.28i	.3325i	12.30f

‡ Delivered. * Prices incl. dealers discount except as noted.
CEMENT: *a* Subj. to 10¢ dis. *b* Less 2% for cash. *c* CL price dealers discount not incl. *e* Truckload lots, destination price. *k* LCL.
SAND GRAVEL, STONE & SLAG: *a* Truck lots. *b* Per cu. yd. *c* 5 tons or more. *e* ¼". *f* Pea gravel. *g* Less 5% for cash. *k* Less than 5 tons. *i* Sales tax incl. *j* F.o.b. quarry. *k* Barge lots asd. *l* F.o.b. scow Hudson river. *m* Less 2% for cash. *n* F.o.b. cars. *o* 1–3 mi zone. *p* Add 10¢ for ea. add'l mi zone.
CONCRETE BLOCK: *a* Cinder. *b* Waylite. *c* Haydite. *d* Celocrete *e* 5¼ x 8 x 12 in. *f* 8 x 4 x 16. *g* F.o.b. truck at job. *i* Less 2% for cash *j* Less 1% for cash. *l* F.o.b. plant San Rafael. *m* F.o.b. yard
READY MIXED CONCRETE: *a* 5 cu. yds. or over del. Man. *b* 25 cu. yds. or more. *c* 10–100 cy. brackets. *d* 1–3 mi. zone. *e* 2,000 lb comp. *f* 2500 lb. comp. *k* Less 50¢ for cash. *i* 5% off for cash. *j* 2% off for cash. *k* Sales tax included. *l* 1:2½:4. *m* F.o.b. yard. *n* Plus escalator clause. *o* Add 15¢ for ea. add'l 3-mi zone.

CASH DISCOUNTS CEMENT to Contractors: Truck delivery, 2% for cash on 10th of month; on carload deliveries, no trucking, same as dealer cash discount 10¢ per bbl. for payment within 15 days of date of invoice. Subject discount 10¢ per bbl. 20 days in Montreal.

CURRENT MAXIMUM PRICES AT CEMENT MILLS

Charge for bags not included. For paper bags add 30¢ per bbl., not refundable.

	Bulk		Bulk		Bulk		Bulk
Richard City, Tenn.	$2.90†	Buffington, Ind.	$2.85†	Steelton, Minn.	$2.95†	Muskegon, Mich.	$3.00†
Cilnchfield, Ga.	2.90†	Independence, Kan.	2.80†	Leeds, Ala.	2.75†	Saginaw, Mich.	2.90†
Kingsport, Tenn.	2.90†	Hannibal, Mo.	2.85†	Duluth, Minn.	2.95†	Wyandotte, Mich.	2.90†
West Des Moines, Iowa	2.95†	Northampton, Pa.	2.75†	Hudson, N. Y.	2.75†	Buffalo, N. Y.	2.85†
Nazareth, Pa.	2.75†	Universal, Pa.	2.95†	Alpena, Mich.	2.80†	Oswego, N. Y.	3.00†
Bath, Pa.	2.75†	Waco, Tex. (+ 10¢ tax)	2.60†	Detroit, Mich.	2.90†	Cleveland, O.	2.90†

	Bulk
Toledo, O.	$2.90†
Milwaukee, Wis.	3.05†
Green Bay, Wis.	3.05†
Ironton, O.	2.90†
Montreal City	2.66
W. Winfield, Pa.	2.95†

† *Prices to hold for fourth quarter of* 1954.

PAVING BRICK, BLOCK, ASPHALT, ROAD OILS—F. O. B. CITY

	PAVING BRICK AND BLOCK Granite Per M lots of 50,000 4x4x8 in.	Brick per M 3x4x8½ in. carload lots	Wood per sq. yd. 3½ in. 10-lb. treat	PAVING ASPHALT Per ton, less than 80 penetration Tank car	Drums	ASPHALT BINDERS—FLUXES Per gal., 80–300 penetration Tank car	Drums	CUTBACK ASPHALT MC Per ton Tank car	Drums	ROAD OIL Per gal. Tank car	ASPHALT EMULSION RSI Per gal. Tank car	Drums
Atlanta	$82.00	$41.00	$2.25	$26.00	$33.25	$0.215	$0.455	$0.095w	$0.185w	$0.105	$0.115	$0.225
Baltimore	150.00‡	75.00‡	.....	21.00i	.....	.085i	0.175i	.09iw#	.18iw#	.09i	.095i	0.185i
Birmingham	.....	49.50i	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Boston	.....	.....	.....	22.00a	23.00a	22.00av	22.00av	.09F	.....	.09a	.10aG	.22aG
Chicago	155.00‡	85.00‡	3.45/3.55‡j	19.85b	29.85b	18.85bv	28.85bv	.004bw#	.1740bw#	.0725b	.....	.....
Cincinnati	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Cleveland	200.00	70.00d	5.03g	23.00	.....	23.00i	.....	.1025ipF	.....	.....	.1025iG	.18iG
Dallas	e	40.00	e	24.05	43.09	.1016	.2103	28.91	50.44	.098	.1087	.1960
Denver	.....	50.00	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Detroit	.....	98.00	.....	27.21	.....	27.21v	.....	.1188w/	.....	.0792	.....	.211
Kansas City	e	e	e	15.00el	.....	15.00v	.....	.095v/	.....	.055v	0.11	.....
Los Angeles	e	.....	e	16.00dmz	.....	16.00dvz	.....	18.00dzK	.....	17.00dv	.0825/	.1725/
Minneapolis	.....	.....	2.97A	.....	.....	.....	.....	.....	.....	.....	.....	.....
Montreal	.....	e	e	27.00n	39.60n	.135n	.198n	16.50nu	20.90nu	.132n	.197ns	.290ns
New Orleans	.....	.....	.....	17.50v	....e	17.50vw	....e	.085vw	....e	.0825P	.0825PL	.....
New York	.....	.....	2.75/	23.89qCD	44.32qD	22.89tCD	43.57tD	.1023wCDF	.1880wDF	.....	.1023CD	.1918D
Philadelphia	175.00	110.00	4.06	22.00	.....	.....	.....	.09uF	.....	.....	.....	.....
Pittsburgh	165.00	48.00	4.60	27.00	38.00	.10	.21	27.00F	40.00F	.098	.11	.234
St. Louis	.....	e	.....	18.55f	.....	.1713	.....	.0885uM	.....	0.155	.10	.....
San Francisco	.....	55.00i	.....	17.50g	33.00gp	17.50gkv	33.00gkv	20.00gN	37.50gN	18.75v	.085fy	.....
Seattle	.....	.....	.....	17.50A	38.00A	17.25kv	.....	24.50K	.....	19.75kv	.085A	.095w

‡ Delivered.
PAVING BRICK & BLOCK: *a* CL. *c* 2½ x 8¼ x 4. *d* LCL, truck deliveries. *e* Not used. *f* 2" interior 6# treat. *g* 3" *k* 2" int., ¾# treat. *i* 3 x 3½ x 8¼. *j* 2½", 6lb. tr.
ASPHALTS: *a* Price at plant, Everett, Mass. *b* F.o.b. refinery Lockport, Ill. *c* F.o.b. Sugar Creek, Mo. *d* F.o.b. refinery, El Segunda. *e* F.o.b. Baton Rouge. *f* F.o.b. Wood River or Roxana, Ill. *g* F.o.b. Richmond, Calif. *k* F.o.b. Martinez. *i* F.o.b. refinery, Baltimore. *j* F.o.b. refinery, Inglewood, Calif. *k* 50–110 penetr. *l* Less than 100 penetr. *m* 40/80 penetr. *n* Tax incl. *o* Drums not avail. Shipped in steel bbl. *q* 40/85 penetr. *r* In customer's drums. *s* Shipped in drums, per drum. *t* 85/200 penetr. *u* Per 100 gal. *v* Per ton. *w* Per gal. *x* Also tank trucks *y* F.o.b. Oakland. *z* F.o.b. refinery, Cleveland. # F.o.b. Destrehan, La. C Bulk. D Prices based on transporting to Manhattan via truck. # RC. F Also RC. G Also MS, SS. # RC-5 incl. I MC 4. J MC, RC .0675. K MC 3, 4 & 5. L MS. M MC 1-5, RC 1-5, .089. N MC 3.

IRON AND STEEL PRODUCTS—PER 100 LBS. BASE MILL PRICES

	STRUCT SHAPES—	PLATE CARBON STEEL	REINF BARS billet	RIVETS ½-in. structural	SHEET PILING Base	STEEL RAILS Per Net Ton Standard	Light	Re-rolled	TRACK SUPPLIES Angle Bars	Std Spikes	Tie Plates	Track Bolts
Birmingham Area	$4.25	$4.225	$4.30	$9.25	....	$89.00	$107.00	Not	$5.425	$7.30	$5.275	....
Chicago Area	4.25	4.225	4.30	9.25	$5.075	89.00	107.00	avail-	5.425	7.30	5.275	....
Pittsburgh Area	4.25	4.225	4.30	9.25	5.075	89.00	107.00	able	5.425	7.30	5.275	$11.50
Buffalo Area	4.25	4.225	4.30	9.25	5.075	89.00	107.00	....	5.425	7.30	5.275	11.50
Cleveland	....	....	4.30	9.25	5.075	.....	.....	....	....	....	....	11.50
Youngstown Area	....	....	4.30	....	....	.....	.....	....	....	7.30	....	....
Geneva	4.25	4.225	....	....	....	.....	.....	....	....	....	....	....
Los Angeles	....	....	....	....	5.075	.....	.....	....	....	7.30	....	....
Pueblo	4.30	4.70	4.75	....	....	.....	95.00	....	5.425	7.30	5.275	11.50

IRON AND STEEL PRODUCTS—F. O. B. WAREHOUSE, PER 100 LBS., BASE PRICE

	STRUCTURAL SHAPES Per 100 lb. base price	REINFORCING BARS Per 100 lb., base price 5 tons to carload lot New billet	Rail steel	EXPANDED METAL LATH Per 100 sq. yd., carload lots Std. diamond mesh, 3.4 lb.	Std. ribbed 3.4 lb.	WELDED FABRIC REINFORCING Per 100 sq. ft., carload lots, fob mill
Atlanta	$7.31	$7.11e	$7.11e	$38.00‡	$42.00‡	
Baltimore	7.02	7.06j		42.00	45.00	
Birmingham	6.35	6.15t	6.15t	51.00p	57.00p	
Boston	7.59a	7.37	7.37	42.00	46.00	
Chicago	6.69	5.78gu	5.78gu	46.00‡	56.00‡	
Cincinnati	7.06ak	7.06rv	....	39.00ss	43.00ss	
Cleveland	7.02	5.76c	....	39.00‡	43.00‡	
Dallas	9.05	7.25	7.25	49.00	52.00	
Denver	8.15	7.20c	....	48.00s	63.00ss	
Detroit	7.16	6.53dw	....	50.50	60.50	
Kansas City	7.36a	7.57	....	41.40	46.00	
Los Angeles	7.55fd	7.05	....	52.00	58.00	
Minneapolis	7.15d	7.68b	7.68b	37.00	41.00	
Montreal	7.50–8.00c*/8.50–9.20d	6.65i	6.65i	46.00p	51.00p	
New Orleans	....	6.20nkz	....	66.00	60.00	
New York	7.48	6.85yaa	6.85yaa	42.00ss	48.00ss	
Philadelphia	6.42	6.67	....	38.00‡	42.00‡	
Pittsburgh	6.55	6.55a	6.55	37.60	39.60	
St. Louis	7.09a	6.30c	6.30c	55.00f	56.00f	
San Francisco	7.50	6.85j	....	41.50	47.50	
Seattle	5.00e	6.55cj	....	53.50ss	50.50ss	

EXTRAS, per cwt.—*Quantity: less than 700¢, +50¢; 700–1499¢, +25¢; 1500–7999¢, +10¢; *Sheet: #2 +$2.20; #3 +$1.10; #4 +80¢; #5 +62.5¢; #6, #7 +45¢; #8, #9, #10 +30¢; *Bending: heavy +80¢ ligh, +$2 (except in New York City and surrounding metropolitan area where bending must be done on the job) *Engineering (details and placing from designs by others): over 500 tons, +45¢; 200–500 tons, +80¢ but not over $4500; 20–200 tons, +60¢ but not over $2000; 5–20 tons, +70¢ but not over $240; under 5 tons, +85¢ but not over $70 *Design only: +60¢

Quantity extras, per cwt.: under 100¢, +$4; 100–399¢, +$3; 400–999¢, +$85; 1000–1999¢, +$2; 2000–9999¢, base price; 10,000–19,999¢, +20¢; 20,000–39,999¢, —40¢; 40,000¢ and up, +1 50¢

WELDED FABRIC REINFORCING
4 × 16 in., No. 5 & 10 wires— Joliet, Ill., Donora, Pa., Monessen, Pa.....$3.18
4 × 12 in., No. 3 & 12 wires— Joliet, Ill., Donora, Pa., Monessen, Pa.....$2.06
6 × 6 in., No. 6 & 6 wires— Joliet, Ill., Donora, Pa., Monessen, Pa.....$3.33

*‡ Delivered *a 2000–9999¢ *b 10,000–15,999¢, fob city *c 20 tons or over *d 10,000–19,999¢ *e fob plant */ incl. delivering in free zone *g CL *h list price; dominion tax exempt; add provincial and municipal taxes *i add dominion, provincial and municipal sales taxes *j intermediate and hard grade *k fob city *l delivered; contractor to do unloading *m copper alloy *n LCL *o asphalt coated *p del. of 500 sq. yd. or more *q 4¢ per sq. yd. *r 2% off for cash *s add 2.5¢ switch *t add 5¢ switch, 15¢ del. *u add 6.25¢ switch *v incl 15¢ del. *w add 20¢ del. *x add 5¢ switch *y add 30¢ del. *z add 10¢ del. *aa Prices beginning Aug. 1 based on Morrisville, Pa.; previously based on Sparrow Pt., Md. Decrease in freight costs due to switch in mill base offset mill price rise July '54. *A American made. *C Canadian made. † Number system replaces inch system of classifying bar sizes. New system is based on number of eighth inches in diameter of bar.

PLUMBING, HEATING, WATER, SEWER AND DRAIN PIPE

	C. I. PIPE Per net ton f.o.b. 6 in. to 24 in.a	ASBESTOS CEMENT PIPE per lin. ft. f.o.b. city 6" Pr Cl. 150	12" Sew Cl. 1	VITRIFIED SEWER PIPE Per foot, Delivered ASTM C13-44T std. 8 in. s.s.	std. 12 in. s.s.	24 in. de.	36 in. de.	CLAY DRAIN TILE ASTM C4-24 Per 1,000 ft., carload lots, f.a.b. 6 in.	8 in.	CONCRETE SEWER PIPE Per ft., delivered: ASTMC 14-41 12 in.	24 in.	WROUGHT STEEL PIPE (Full standard weight) Discount from list; see footnote
Atlanta	$101.00	$1.45	$2.42	$ .645	$1.27	$4.82	$13.925	$248.00	$356.00	$0.90m	$3.40m	
Baltimore	121.50	1.45	2.42	.646	1.053	4.275v	11.3775	178.20	274.80	.95	2.60	
Birmingham	103.00	1.45	2.42	.42	.75	2.99	....	250.00‡	375.00‡	1.25m	2.75m	
Boston	122.00	1.47	2.20	.553grl	1.0665grl	4.365grl	12.00grl	157.80r	289.20r	1.62mg	3.95mg	
Chicago	107.00	1.45	2.20	.70m	1.35m	5.62m	13.50m	180.00‡	270.00‡	.80	2.80	
Cincinnati	106.00	1.47	2.20	.561t	1.120t	4.64t	12.20t	225.00	350.00	.90m	2.95m	
Cleveland	108.00	1.47	2.20	.49n	.945s	3.96s	10.65s	188.00m	245.65m	.85m	3.25m	
Dallas	112.00	1.47	2.54	.420	.790	4.00k	9.175	.....	.....	.49	1.60	
Denver	115.00	1.53	2.54	.45m	.78n	5.45n	....	.....	.....	.74m	2.80m	
Detroit	105.00	1.47	2.20	.75	1.45	5.75	15.50	230.00m	350.00m	.86	3.47	
Kansas City	113.00	1.47	2.20	.53	.945	3.87	10.60	250.00	490.00	.90	3.25p	
Los Angeles	120.65	1.52	2.20	.671	1.461	5.971	14.991	228.20l	348.90l	.95	2.75l	
Minneapolis	112.00	1.49	2.42	.75me	1.36me	5.60me	....	.....	.....	1.42h	4.05h	
Montreal	110.00	....	....	1.07u	1.73u	5.33u	8.93u	.....	.....	1.17i	3.11j	
New Orleans	101.50	1.45	2.42	.48	.875	4.09	....	260.00r	460.00r	.65	2.29	
New York	111.35	1.47	2.20	.66	1.28	5.08	13.42	.....	.....	1.15	3.00	
Philadelphia	110.00	1.46	2.20	.55	1.25	3.95v	12.65v	300.00‡	350.00‡	1.60h	3.95h	
Pittsburgh	110.00	1.47	2.20	.465m	.864m	3.86m	9.78m	182.00	344.00	1.05h	2.80h	
St. Louis	112.00	1.48	2.20	.56	1.03	4.22	9.80	180.00‡	380.00‡	1.25d	2.70d	
San Francisco	127.00	1.53	2.20	.61d	1.41d	5.78d	14.22d	235.00‡	392.00‡	1.05m	3.30m	
Seattle	122.00	1.54	2.40	.51b	.91b	....	....	180.00r	.....	.85b	2.75b	

*‡ Delivered *a Class B & heavier. Based on existing freight rates; subject to rate change. Gas pipe and class A, $5 per ton additional. 4 in., $7 per ton additional. 30 in. and larger, usually, $1 per ton less. *b Extra strength ASTM C 200–44T *c 6-in., $90 *d SS361-A *e 30-in. */ 21 in. *g culvert pipe; reinforced, ASTM C 76–41 *h reinforced, ASTM C 75–41 *i reinforced, ASTM C 76–37 *j centrispun; no standard specs. in Canada *k 2% off for cash *l fob plant *m truck delivery *n LCL delivered, fob truck *o listed price based on LCL (no min.) *p freight allowed to destination in city *q ASTM C 13–40 *r CL fob origin, freight allowed *s 2 ft lengths *t 3 ft lengths *u CESA A 60–1941 specs. used *v standard strength *w 6 in., $1.67 per ft., Class 150, CL, fob track

*WROUGHT STEEL PIPE: Deduct discounts shown above from the following standard list consumers carload prices to get mill price. List prices per ft. (based on approx. $200 per net ton): *Butt Weld* ¼ in., 5¢; ⅜ in., 6¢; ½ in., 6¢; ¾ in., 8¼¢; 1 in., 11½¢; 1 in., 17¢; 1¼ in., 23½¢; 1½ in., 27½¢; 2 in., 37¢; 2½ in., 58½¢; 3 in., 76½¢. *Lap Weld* 3½ in., 92¢; 4 in., $1.09; 5 in., $1.48; 6 in., $1.92. Add freight rates plus 3% transportation tax to get destination price.

WROUGHT IRON PIPE: List prices per ft. same as for wrought steelpipe, but add following "discounts" to get Pittsburgh mill price: *Butt Weld* — 1 in. black, + 32.75, galv. + 61.0; 1¼ in. black, + 32.75, galv. +60.50, 1½ in. black, + 29.25 galv. + 56.75; *Lap Weld* — 2½ in. to 3 in. black + 33.50 galv. + 59.5; 4½ in. to 6 in. black + 30.50 galv. + 54.75. Add freight rates plus 3% transportation tax to get destination price.

† Threaded and coupled. a 3½ to 4 in. b Continuous weld. c 5 and 6 in. d 6 in.

REPORT ON WINTER OF 1953-54!

How STERLING *AUGER-ACTION* ROCK SALT helped save over 100 TIMES* the total cost of DETROIT'S ice and snow-control program

*Figures courtesy Glenn C. Richards, Commissioner Department of Public Works, Detroit, Mich.

Here's What Happened When The Motor City Fought 35 Snow Storms With STERLING *Auger-Action* ROCK SALT

MINIMIZED EMPLOYEE LATENESS AND ABSENTEEISM

City experts agree that each of Detroit's 35 snow and ice storms, *without* rock salt's prompt action, would have meant an average ½ hour delay per employee in to-work transportation. $55,638,205 in *saved* man hours! Impassable streets would have cost retailers an estimated $26,342,500! And Detroit Street Railways would have lost more than $2,000,000 in uncollected fares. A total estimated saving of $83,980,705!

SAVED MILLIONS FOR DETROIT TRUCKERS, TOO

Detroit's Trucking Association reports a normal *full day's work* throughout the city's 35 storms last year. If streets had remained snowbound or slippery, they would have had only an average of a *half* day's work for a full day's pay—plus gasoline and maintenance costs. Estimated savings—*seven million dollars!*

HELPED LOWER AUTO LIABILITY AND COLLISION INSURANCE RATES

Though other factors besides the city's "Bare Pavement" policy entered into it, the fact remains that Detroit's liability and collision insurance rates are only about one-half those of other cities of comparable size which do *not* use straight rock salt ice-and-snow-control methods.

IN MAN-HOURS IN DOLLARS **STERLING** *AUGER-ACTION* **ROCK SALT** COSTS LESS SAVES MORE

City, County, State Highway Officials!
SEND THIS COUPON TODAY!

International Salt Co., Inc., Scranton 2, Pa.
The Detroit Report interests me. Would like to know how Sterling *Auger-Action* Rock Salt might effect similar savings in our program. Please have representative call.

Name_____ Title_____

Department_____

Address_____

City_____ Zone____ State____

LUMBER, TIMBER, PLYWOOD—PER M FT., B.M., CARLOAD LOTS F.O.B.

SHORT LEAF YELLOW PINE AND DOUGLAS FIR

All S. L. Y. P. is No. 2 common or better and for No. 1 N. C. Box. (Prices in Bold Face)

All Fir boards, dimensions, planks No. 2, Fir small timbers and timbers are No. 1 Lengths as to 20 ft.

(Prices in italics)

	1x6 s4s	1x8 s4s	2x4 s4s	2x6 s4s	2x8 s4s	2x10 s4s	3x12 Rgh	6x12 Rgh	12x12 Rgh	LONG LEAF Y. P. Merchantable grade up to 20 ft. 2x12 Rgh	12x12 Rgh	PLYWOOD Rail freight increment (See note for base price) ¼"	¾"
Atlanta	† $77.00	$80.00	$73.50	$74.00	$77.50	$81.00	$79.00					$22.32	$27.24
Baltimore	* 90.00	95.00	87.00	88.00	91.00	98.00	102.00			$160.00	$170.00	25.92	31.60
	122.00g	*122.00g*	*125.00g*	*122.00g*	*122.00g*	*120.00g*	*120.00g*	*$135.00*	*$135.00*				
Birmingham	† 77.50	79.50	73.50	80.50	86.00	85.50	95.50			115.50	155.50	21.78	26.58
	105.00	*106.00*	*108.50*	*108.50*	*108.50*	*108.50*	*108.50*	*108.50*	*108.50*				
Boston	* 95/108a	100/112a	90/102a	93/107a	100/112a	104/114a						25.92	31.60
	! *88.00n*	*88.00n*	*111/113*	*111/113*	*111/113*	*111/113*	*113.00*	*116.00*	*116.00*				
Chicago	** 98.00	101.00	90.00	105.00	112.00	115.00	110.00			139.00	139.00	22.45	27.37
	105.00	*105.00*	*108/110*	*110.00*	*112.00*	*112/114*	*120.00*	*120.00*	*120.00*				
Cincinnati	* 91.00	92.95	80.00	88.00	92.00	100.00	107.25			128.00	128.00	25.00	30.48
	96.50	*98.25*	*105.50*	*104.50*	*105.50*	*104.50*	*130.25*	*130.25*	*130.25*				
Cleveland	**100.00	102.00	96.00	104.00	104.00	104.00						25.37	30.93
			104.00	*107.00*	*107.00*	*107.00*	*119.50*	*119.50*	*119.50*				
Dallas	†† 70.00	80.00	65.00	60.00	60.00	60.00	130.00			130.00	130.00	18.72	22.80
Denver	* *Not in stock*		*117.00*	*118.00*	*118.00*	*118.75*	*125.00*	*137.75*	*140.50*			13.92	16.98
Detroit	‡ 112.00	115.00	105.00	112.00	118.00	115.00						25.00	30.48
	89.50	*98.50*	*100.50*	*100.25*	*90.25*	*101.75*	*114.50*	*116.00*	*117.00*				
Kansas City	* 110.00	110.00	110.00	110.00	110.00							16.56	20.16
	122.00	*122.00*	*125.00*	*125.00*	*125.00*	*132.00*	*170.00*	*170.00*	*170.00*				
Los Angeles	! *97.00*	*97.00*	*97.00*	*97.00*	*97.00*	*97.00*	*128.00*	*128.00*	*128.00*			16.61ab	20.25ab
Minneapolis	§ *145.00*	*145.00*	*145.00*	*145.00*	*145.00*	*145.00*	*165.00*	*165.00*	*165.00*			19.89	24.25
Montreal	ab 88.00	97.00	88.00	88.00	100.00	118.00	105.00			99.50	99.50		
	165.00	*165.00*	*165.00*	*165.00*	*165.00*								
New Orleans	† 100.00	100.00	92.50	85.00	90.00	94.00	118.00			150.00	148.00	18.72	22.80
	† *106.50*	*106.50*	*116.00*	*116.50*	*116.50*	*116.50*	*115.00*	*122.00*	*122.00*				
New York	‡ 110.00	113.00		120/125	120/125		155/165			225.255	225/255	25.92	31.60
			Range from $122.50 to $127.50					*150/160*	*150/160*				
New York	** 93.75	92.25		94.00	95.00	98.50	92.50			175.00	240.00		
	96.00	*96.00*	*104.00*	*105.00*	*105.50*	*106.50*	*106.00*	*127.00*	*127.00*				
Philadelphia	‡	Range from $110.00 to $127.00				110/127	110/127			210/220	210/220	'25.92	31.60
		Range from $128.00 to $165.00				*125/155*	*155/165*	*150.00*	*150.00*				
Pittsburgh	†	Range from $95.00 to $100.00					120.00			120.00	130.00	25.92	31.60
	120.00	*120.00*	*120.00*	*120.00*	*120.00*	*120.00*	*135.00*	*145.00*	*145.00*				
St. Louis	fg 112.50e	114.50e	109.00d	121.00d	127.00	132.00						18.72	22.80
			114.50	*122.50e*	*122.50e*	*124.50*	*169.50e*	*169.50*	*174.50*				
San Francisco	A† 86.00	88.00	87.00	86.00	84.00	88.00	82.00	85.00	85.00			12.22	14.91a
Seattle	† 78.50	78.50	78.50	78.50	78.50	78.50	76.00 ¶	88.50	88.50				

† F.o.b. mill. * F.o.b. city, CL, out of yard. ** F.o.b. city, CL, direct mill shipment. ‡ Deliv. to contr. CL. 1. Retail, LCL, at yard. § Retail, LCL, deliv. 2. Deliv. truck lots. 3. asd.

LUMBER: **Bold Face type, Southern Pine.** *Italics, Douglas Fir.* a Spruce b Tax exempt. c 5M lots. d 8–12 ft. lengths. e 8–16 ft. lengths. g No. 1 common. i 8 ft. lengths. k No. 3 common. n #3. A Rail freight rate from North west mills to San Francisco are $11.50 to $15.00 per M ft bm. From Northern Calif. mills $9.00 by rail, $9.50 by truck. All rates for surfaced stock.

For rough, add $3.00 to above figures.

PLYWOOD: Plyform grade Fir Plywood, 4' by 8' panels, 5-ply, sanded 2 sides, water resistant glue, carload lots, delivered per 1,000 sq. ft. surface. Seattle base price on ¼", $171.00; on ¾", $191.00. Exterior plyform ¼" $190.00, ¾" $212.00. For other centers add rail freight increment from table on proper size Oiling and edge sealing charges included. a Lower rate by water shipment b 80,000 lb. minimum.

GLASS, EXPLOSIVES, CHEMICALS

	WINDOW GLASS Discounts from jobbers list, Feb. 1, 1950a Single or Double Thickness A quality	B quality	EXPLOSIVES Per lb. 40% Ammonia Gelatin in 50 lb. cases delivered in 200 lb. lots*	
Atlanta	79%	80%	$0.2365	
Baltimore	78%d	80%*	.2365	
Birmingham	83%	83%	.1840	
Boston	77–10%	77–10%	.2365	
Chicago	76%	76%	.2365	
Cincinnati	78%	76%	.2365	
Cleveland	76–10–10%	76–10–10%	.2765	
Dallas	75%	75%	.2440	
Denver	79%	79%	.2415	
Detroit	76–10–10%	76–10–10%	.2365	
Kansas City	80–10%	80–10%	.2415	
Los Angeles	78%	78%	.2390	
Minneapolis	75–10%	75–10%	.2415	
Montreal	40–5%bc	40–10–5%b	21.35A	
New Orleans	78%	79%	.2415	
New York	80–10%	80–10%	.2975g	
Philadelphia	77%	79%	.2365	
Pittsburgh	80%	80%	.2090	
St. Louis	80–10%	80–10%	.2415	
San Francisco	70%	70%	.2365	
Seattle	78%	78%	.2390	

Price of 60% Ammonia Gelatin is $0.15 per lb. higher than 40% in U.S.; $1.75 per 100 lbs. higher in Canada.

Glass: a Jobbers' list price per box, 14 x 20, sz, $42.75 for A quality, $37.50 for B quality; 14 x 20, ds, $60.00 for A quality, $52.75 for B quality. b Discount from list, Apr. 1951; sales tax included, but 6% tax exemption not allowable for. c Single thickness. d Discount 6/15/52.

Explosives: * Urban prices influenced by service charges or local storage and delivery regulations do not consistently reflect quantity prices in less congested areas. g In borough of Kings, Queens, and Richmond and in Manhattan south of Canal St., add delivery charge of $20.00 per trip. A F.o.b. Beloeil (near Montreal), per 100 lb. forelte, 40%. Foreite 60%, $23.10.

40% Ammonia Gelatin price ranges in other than urban areas, per lb.
(except Seismograph Grades)

	C/L 20,000 lb. net	Tons	200 lb. lots
E. of the Miss., except Fla. and Me.	$0.184	$0.2165	$0.2365
W. of Miss. to Rocky Mtn. States, Fla. and Maine	.180 – .1965	.2215–.220	.2415–.249
Rocky Mtn. States	.180 – .2015	.2215–.229	.2415–.254
Pacific N. W. States	.1955–.199	.219 – .2315	.239 – .2515
Pacific S. W. States	.184 – .1915	.2165–.219	.2365–.2415

PILES, TIES F.O.B.

PILES

Prices per linear foot, fir and pine, bark off, f.o.b. cars, New York. Fir based on Wash. and Ore. points to New York shipping area; pine based on freight from Norfolk.

Dimensions	Points	Length	By Rail Pine*	Fir
12-in. at butt	6-in.	30 to 50-ft.	$0.51	....
12-in.—2-ft. from butt	6-in.	50 to 59-ft.	.54	....
12-in.—2-ft. from butt	6-in.	60 to 69-ft.	.58	....
12-in.—2-ft. from butt	6-in.	90 to 100-ft.	....	....
13-in.—2-ft. from butt	5-in.	91 to 100-ft.	....	....
14-in.—2-ft. from butt	5-in.	50 to 69-ft.	.50/.68	....
14-in.—2-ft. from butt	6-in.	70 to 79-ft.	.72/.83	.93
14-in.—2-ft. from butt	5-in.	80 to 85-ft.	.85/.93	.94
14-in.—2-ft. from butt	5-in.	85 to 89-ft.	....	1.00
14-in.—2-ft. from butt	5-in.	90 to 100-ft.	....	1.02

* Pine piling over 80-ft. available only in limited quantities.

RAILWAY TIES

Prices f.o.b. per tie for carload lots:		8'x8"x8' Untr.	8'x8"x8' Tr.	7'x9"x9"x9' Untr.	7'x9"x9"x9' Tr.
Boston	Oak††	....	....	....	....
	Pine	....	....	....	....
New York	S. L. Sap Pine	$2.00	$4.00	$3.00	$5.00
	Mixed Oak	2.50	4.50	3.50	5.50
Birmingham	Hardwood:	2.40	3.88a	2.85	4.58a
Chicago	Red Oak	....	3.20a	....	4.10/4.20a
Los Angeles	Douglas Fir	....	....	....	....
	Redwood:	....	....	....	....
Philadelphia	Red Oak	2.55	3.90	3.45	5.10
St. Louis	White Oak	2.20	....	2.50	....
	Red Oak	2.10	2.65a	2.35	3.05a
	Sap Pine or Cypress	....	2.55a	....	2.90a
San Francisco	Douglas Fir	2.08e/	3.08e/	2.73b/	3.93ca/
Montreal	Birch or Maple	....h	....h	....h	....h

Tr.—Treated; Untr.—Untreated. a Creosoted. b 7" x 9" x 8'. c Empty cell. e Green. f F.o.b. cars. h No constant price available. i Not available.

CHEMICALS

Water, sewage treatment, road work, f.o.b. carlots, New York

Bleaching powder in drums f.o.b. works, per 100 lb	$5.02
Chlorine cylinders, liquid, per lb. f.o.b. works	.095
Calcium chloride, 77–80%, flaked, 100-lb. paper bag, f.o.b. works, ton	27.00
Silicate of soda, 52 deg., in drums, f.o.b. works, per 100 lb	2.30
Soda ash, 58%, in paper bags, per 100 lb. dense	1.70
Sulphate of aluminum, commercial, in 100-lb. bags f.o.b. works	1.85
Sulphate of copper, in bags, 99% per 100 lb. f.o.b. works	10.35

TRAMRAIL
Bridge Traveler
SLASHES Erection Costs

Illustrated is one of six Cleveland Tramrail Travelers on the Dalles Bridge over the Columbia River. Traveler length is 37'-6". Operation is by handwheel drive. Complete fence enclosure assures maximum safety.

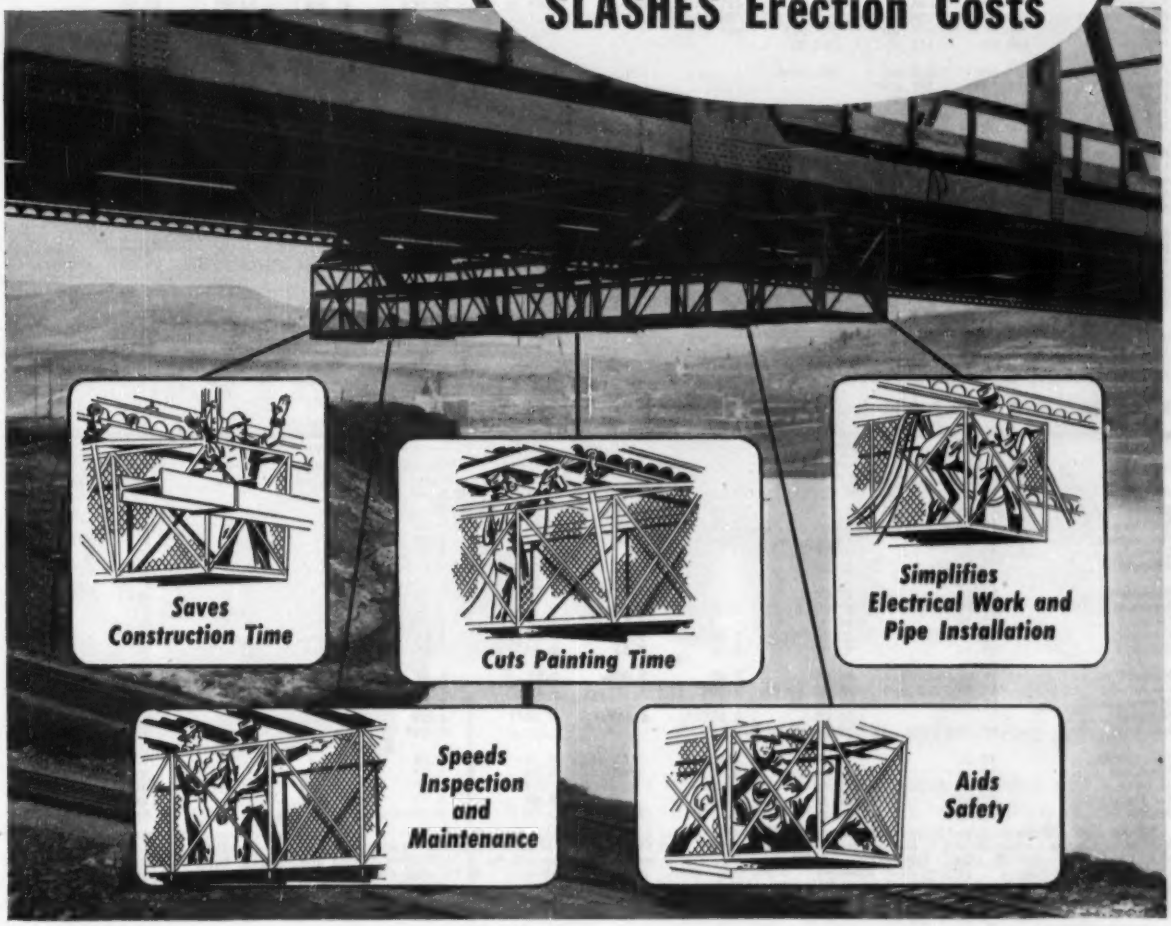

BIG savings in time and money can be made with a Cleveland Tramrail bridge system both during erection and later for inspection and servicing.

Advantages that the equipment provides for erection work alone usually justify its installation by a bridge contractor — even if not called for in the specifications. Time saved in many phases of bridge construction makes the equipment profitable. The savings do not stop with the completion of a bridge. They continue year after year by reducing man-hours required for inspection, painting and miscellaneous servicing work.

It will pay you to look into the possibilities that a Cleveland Tramrail Bridge System offers for new bridges to be built, as well as for existing ones.

GET THIS BOOK!

BOOKLET No. B-2008. Packed with valuable information. Profusely illustrated. Write for free copy

CLEVELAND TRAMRAIL DIVISION
THE CLEVELAND CRANE & ENGINEERING CO.
5188 East 284 St. Wickliffe, Ohio.

CLEVELAND TRAMRAIL
OVERHEAD MATERIALS HANDLING EQUIPMENT

STRUCTURAL CLAY BUILDING TILE, BRICK AND LIME—DELIVERED

	STRUCTURAL CLAY TILE — PARTITION — SCORED, Per M. lots of 2,000 pieces or over, 3x12x12 in.	4x12x12 in.	6x12x12 in.	STRUCTURAL CLAY TILE — LOAD BEARING — SCORED, Per M. lots of 2,000 pieces or over, 8x12x12 in.	10x12x12 in.	12x12x12 in.	BRICK, Per M. in quantity, Common backing	Straight hard	LIME, Per ton, in paper, Carload lot, Hydrated finishing	Common hydrated	Pulverized, or lump
Atlanta	$195.00	$207.00	$247.00	$327.00	$342.00	$381.00	$27.38	$27.38	$19.00	$17.50	$.....
Baltimore	186.00	198.35	372.00	421.50	549.00	627.00	36.00[h]	41.00[h]	32.00	21.50	.....
Birmingham	126.00[p]	136.00[n]	.....	284.00[p]	.....	.....	26.50[f]	32.50[gg]	29.25	24.00	.....
Boston	196.00†	209.00†	392.00†	283.25†	.....	.....	36.85[p]	39.85[p]	30.00†	28.00†	.....
Chicago	135.00	145.00	280.00	.....	.....	.....	26.00	28.00	31.00	27.00	.....
Cincinnati	185.00[f]	195.00[f]	260.00[f,dd]	.....	.....	.....	45.00[f]	46.00[f]	26.00[f]	26.00[f]	.....
Cleveland	170.00**	181.00**	.....	.....	.....	.....	34.50	34.50	28.25	23.25	82.00[ss]
Dallas	.....	118.00	.....	.....	.....	.....	19.75	32.25	32.00	21.80	.....
Denver	.....	.....	.....	.....	.....	.....	34.00	41.00	34.50[hh]	28.00[hh]	34.00[hh]
Detroit	180.00	188.00	289.00	.....	515.00	560.00	37.75[ee]	38.50[ee]	34.00	30.00	.....
Kansas City	127.50	147.50	270.00	270.00	340.00	400.00	28.50	.....	32.00	26.00	28.50
Los Angeles	r	r	r	r	r	r	27.50[i]	.....	34.00	34.00	35.00
Minneapolis	178.00[p]	196.00[p]	407.00[p]	196.00[p]	.....	.....	35.00[vp]	45.00	40.00[hh,e]	30.00[hh,e]	42.00[hh,ds]
Montreal	165.00[aq]	181.00[au]	335.00[au]	230.00	248.00[r]	.....	39.50	46.00	34.50	22.00	13.75[u]
New Orleans	170.00	170.00	310.00	380.00	.....	.....	31.00	.....	.....	28.00	28.00
New York	147.30[h]	157.10[h]	316.00[eh]	238.10[hn]	.....	.....	40.00	.....	36.00	32.00	.....
Philadelphia	156.30	166.80	312.70	375.20	.....	.....	30/34	35/42	25.00	23.00	2.97
Pittsburgh	138.00	151.00	260.00	228.06	297.00	341.00	36.00	46.00[g]	25.00	23.00	2.97[m]
St. Louis	147.00[ee]	168.50[ee]	338.25[ee]	466.00[ee]	439.00	621.50	40.00[al]	38.50[o]	.90[aaa]	.75[aaa]	1.35[aa,spec]
San Francisco	156.85[a*]	177.10[a*]	295.30[dda*]	.....	.....	.....	37.00	.....	26.60	26.60	2.65[m]
Seattle	225.00[ee]	290.00[ee]	320.00	240.00[eeu]	.....	.....	34.00[o]	49.00[o]	42.00[eAA]	37.50	3.90[mAA]

† F.o.b. yard Roxbury. *a* Smooth. *b* Per 50 lb. bags. *c* 6 x 12 x 12 in.-3 cell. *d* Pulverized hot. *e* 5%, 10th following month. *g* 5½ x 8 x 12. *h* F.o.b. trucks, job site N.Y.C. *j* Truck load or over. *k* $1.00 discount for cash. *l* Red face. *m* Per bbl., 180 lb. *n* 7½ x 7½ x 12. Speed title. *p* Truck lots. *q* Provincial and Municipal tax extra. *r* Not used because of earthquake danger. *s* 2% discount for cash. *t* 5½ x 8 x 11¼. *u* Tax exempt. *v* Sand lime. *w* 5 x 8 x 12. *y* Stacked. *z* Pebble lime price per 80 lb. sack. *aa* Price per sack. Lime not sold per ton. *bb* LCL. *cc* Truck delivery. *dd* 6 x 12 x 12. *ee* Pebble lime. *ff* 80% common. *gg* Select. *hh* LCL. ‡ F.o.b. yard. ** Warehouse delivery. * F.o.b. Stockton.

PAINT, ROOFING—F.O.B. CARLOAD LOTS

	RED LEAD, Per 100 lb. in 650-lb. (Approx.) bbl. Dry *a*	WHITE LEAD, Per 100 lb. in 100 lb. cases in oil *a*	READY-MIXED PAINT, Per gal., drums, Graphite *b*	Aluminum *c*	Ferric Oxide *d*	ROOFING SUPPLIES; Carload lots f.o.b. factory, Rolls, slate surfaced, 85-90 lb. per sq.	Asphalt felt, per 100 lb.	Tar felt, per 100 lb.	Asphalt coating per gal.	Tar pitch 300 lb. bbl. per ton
Atlanta	$17.75	$28.275	$3.26	$3.51	$3.01	$2.74	$3.01	$2.98	$0.405	$39.75
Baltimore	17.50	27.90	2.75	4.25	3.35	2.66	4.43	4.43	.47	45.00
Birmingham	17.75	28.275	3.90	3.40	.....	2.93	2.93	2.93	.....	42.00[ee]
Boston	17.50	27.90	.....	.....	.....	2.97[gg]	2.82[ag]	2.82[ag]	.42[o]	50.50[g]
Chicago	17.50	27.90	.....	.....	.....	2.91[‡u]	2.86[‡o]	2.86[‡o]	40.00[‡bb,r]	50.00[‡]
Cincinnati	17.50	27.90	.....	.....	.....	2.65	2.46	2.46	.46[y]	49.36
Cleveland	17.50	27.90	2.27[ggg]	2.53[gg]	2.57[gg]	2.65[q]	2.46[o]	2.46[o]	.40[y]	42.70[kk]
Dallas	17.75	28.65	.....	4.05	.....	3.80[q]	3.75[o]	4.35[o]	.36	58.50[kk]
Denver	18.00	28.40	3.29	5.15	3.04	2.65	2.25[o]	2.35[o]	.43[ff]	45.00
Detroit	17.50	27.90	2.35	3.25	2.50	2.65	2.46[f]	2.46	.50	44.00
Kansas City	17.50	28.65	3.45	3.00[gs]	2.65	3.32	3.00[o]	3.00[o]	.43	57.00
Los Angeles	17.50	28.15	3.50[e]	4.80[e]	4.20[e]	3.10[e]	2.00[e]	1	.64[e]	1
Minneapolis	17.50	29.85/28.02	.....	.....	.....	2.65[dd]	2.46[hh,dd]	2.46[hh,dd]	.44[y,dd]	44.00[r]
Montreal	.....	26.95	2.95[#11]	4.05[#11]	3.35[#11]	4.00[f]	3.65[f]	1.00[kk]	.....	3.30[kk]
New York	17.50	27.90	.....	.....	.....	2.65[e]	2.46[e,o]	2.46[e,o]	.44[e,z]	44.00[e]
Philadelphia	17.50	27.90	3.25	3.65	3.15	2.54	2.94	2.94	.37	26.00
Pittsburgh	17.50	27.90	2.65	2.85	3.15	2.75	2.60[o]	2.60[o]	.38	49.00
St. Louis	17.50	27.90	.....	.....	.....	2.50	2.46[h]	2.46[h]	.40[y]	48.45
San Francisco	17.50	28.15	2.40	.....	3.40	2.95	4.00[aa]	.....	.49	.....
Seattle	17.50	28.40	3.07[mee]	2.98[mee]	.....	3.58[mee]	3.05[hmee]	.....	.50[mee]	52.00[mee]

‡ Delivered. Note: Red lead in oil 50c higher than white lead in oil. *a* Red lead prices change frequently due to pig lead price changes. *b* U. S. War Dept. Spec. 3-49A. *c* ASTM Spec. D266-31. *d* 80% minimum ferric oxide. *e* 18 lb. *f* Per 432 sq. ft. *g* F.o.b. yard, Roxbury. *h* Per roll. 65 lb. *i* Net carload lot prices; Minneapolis and vicinity. *k* Per cwt. *l* Not used. *m* 1% discount for cash. *n* F.o.b. city. *o* Per 60-lb. *p* 6-drum, 50 gal. ea. *q* Per 90-lb. roll. *r* F.o.b. factory, Chicago. *s* 466 Med. *t* Federal tax included. *u* Per 90 lb. square. *v* Per ton. *w* Price to large paint contractors is $1.25 less *z* Mineral surfaced. *y* 55-gallon container. *z* Drums. *aa* Approximate cost per 100 lbs. *bb* Roofers coating and cement; Price per ton. *cc* LCL, truck delivery. *dd* 2% cash discount. *ee* Asphalt pitch in 100 lb. package. *ff* 5-gal. drums. *gg* F.o.b. factory. *hh* Incl. freight. *D.* Std Black. *E.* Ready-mixed. *F.* Over 80% ferric oxide. * Aver. wt. approx. 425 to 550 lbs. drum. # Freight allowed to destination not exceeding .50 cwt.

SKILLED AND COMMON WAGE RATES—PER HOUR

	Brick-layers	Car-penters	Struct. Iron Workers	Hoisting Engineers	Plas-terers	Electrical Workers	Steam-fitters	Common Labor, Building	Common Labor, Heavy Const.
Atlanta	$3.10	$2.50	$2.85	$2.60	$2.75	$2.00	$2.90	$1.33	$1.33
Baltimore	3.20[d]	2.75	3.325[f]	3.10/3.25	3.075[f]	2.975	2.975[f]	1.675[f]	1.675[f]
Birmingham	3.25	2.80	2.925[h]	2.32	2.72	3.00	3.025[h]	1.375	1.475
Boston	3.185[e]	2.75	3.275[f]	3.20	3.50[f]	3.13[k]	3.20[d]	2.14[Y]	2.14[Y]
Chicago	3.55[h]	3.30[e]	3.40[h]	3.15[w]	3.625[e]	3.33[f]	3.30[e]	2.50[h]	2.50[h]
Cincinnati	3.325	3.075	3.10[h]	2.85/3.10	3.10	3.28[N]	3.335V	2.12	2.02
Cleveland	3.375[f]	3.325[d]	3.325[f]	3.175	3.325	3.325	3.325[e]	2.575	2.575
Dallas	3.50	2.75	2.875	2.75	3.437	3.00	3.00	1.45	1.45
Denver	3.50	2.85	2.85	2.78	3.30	3.00	3.05	1.875	1.875
Detroit	3.45[ee]	3.21[e] X	3.32[e]	3.20[e]	3.40[dl]	3.52[#]	3.125[h]	2.45[e]	2.45[e]
Kansas City	3.625	2.75	2.90	2.725/2.97	3.25	3.14[e]	3.20[e]	2.03	2.03
Los Angeles	3.40	2.825[m]	3.175[h]	2.72[d]	3.50[m]	3.20	3.35[e]	2.15[f]	2.15[f]
Minneapolis	3.225	2.80	2.97	2.75	3.00	3.15[n]	3.00	2.05	2.05
New Orleans	3.10	2.52	2.90[m]	2.70	2.725	3.00[g]	3.00[e]	1.425	1.425
New York	4.15[h]	3.37[hJ]	3.975[e]	3.84[f]	4.15[d]	3.63[as,p]	3.815[kk]	2.415[J]	2.415[J]
Philadelphia	3.92[k]	3.20	3.63[#]	2.975/3.72[e]	3.625[g]	3.65[m]	3.615[e]	1.95	2.25
Pittsburgh	3.625[h]	3.20[h]	3.225[f]	3.33[h]	3.375[h]	3.50	3.375[h]	2.10[h]	2.10[h]
St. Louis	3.62[e]	3.125[h]	3.10[h]	3.125[h]	3.25[h]	3.50[e]	3.30[#]	2.175[h]	2.175[h]
San Francisco	3.65[e]	2.90[h]	3.175[h]	2.835[e]	3.50[eh]	3.30 U	3.35[K]	2.15[h]	2.15[h]
Seattle	3.40[d]	2.75[d]	2.95[d]	2.78	3.25[d]	3.06 X	3.20[F]	2.35[d]	2.35[d]
Montreal*†	2.00	1.80	1.90	1.70	2.00	1.90	1.90	1.25	1.40

* Cost of living bonus now included in basic wage. # Includes 5¢/hr tool replacement. † Plus 2% vacation pay.

• 6 hr. day. ‡ 7 hr. day. *a* Incl. 3% vac. stamp fund plus 7½¢ WF for bricklayers; 4% VF for electricians plus 8¢ WF, 1% PF. *b* Incl. 10¢ H&WF. *c* Incl. 10¢ VF. *d* Incl. 6% WF. *e* Incl. 11½¢ WF *f* $2.725 homes & housing plus 7½¢ WF. *g* Incl. 17¢ WF *h* Incl. 10½¢/hr. WF. *i* Incl. 7½¢/hr. WF. *j* Incl. 4% VF. *k* Incl. 5¢/hr WF. *l* Incl. 25¢ H, W, Ins., Vac. & Retirement. *m* Incl. 10¢ PF, 7¢ WF. *n* Incl. 3% WF, 3% PF. *o* Incl. 4% WF and 20¢ PF. *p* Incl. 5% W&PF, 4% VF, 1% NC, 6 PH. *q* Incl 7½¢ H&WF. *r* Incl. 1½% PF. *s* Incl. 10¢ WF. *t* Negotiating. *u* Incl. 8¢ WF. *v* Incl. 22½¢ WF. *w* Incl. 7½¢ IF, 5¢ H&WF. *x* Incl. 15¢ WF, 15¢ PF & 20¢ B.F. *y* Incl. 3% WF. *z* Incl. 21½¢ H&WF. *aa* Plus 6% WF, plus travel pay per day. *bb* Plus $4/per day Annuity contrib. *cc* Incl. 7¢ WF, 6% VF. *dd* Incl. 15¢ H&WF. *ee* Incl. 5% WF, 6PH. *ff* Incl. 10¢ WF, 12½¢ VF, 7½¢ PF. *gg* Incl. 3% WF, 3% PF, 2% VF, 1% EF. *hh* Incl. 7½¢ PF. *ii* Incl. 1% WF. *jj* Incl. 2% WF, 1% PF. *kk* Incl. 12¢ WF and 1¢ apprentice. *ll* Incl. 12½¢ H and WF. *mm* Incl. 21¢ H, W & VF. *nn* Incl. 7½¢ WF, 4% VF, 1% PF. *oo* Incl. 8½¢ WF. *pp* Incl. 2% VF. X Incl. 6¢ VF. *qq* Incl. 7¢ H & WF.

MEXICO CITY PRICES

In Pesos, F.o.b. City		Oct '54	Nov '54
Common Wages—Building (8 hr. day) (Peons)	av. per hr.	1.19	1.19
Common Wages—Heavy Const. (8 hr. day) (Peons)	av. per hr.	1.19	1.19
Skilled Labor Wages			
Carpenters (8 hr. day) 1 cl.	av. per hr.	2.25	2.25
Bricklayers (8 hr. day) 1 cl.	av. per hr.	2.25	2.25
Struct. Iron Workers (8 hr. day) Remachadores.	av. per hr.	1.37*	1.37*
Struct. Steel Shapes 3"-15" x 12 meters	per metric ton	1428.62	1428.62
Reinf. Steel, Corr. Rods			
⅜" x 11 meters	per ton	1490.00	1490.00
½" x 11 meters	per ton	1490.00	1490.00
⅝" x 11 meters	per ton	1490.00	1490.00
¾" x 11 meters	per ton	1490.00	1490.00
⅞" x 11 meters	per ton	1490.00	1490.00
1" x 11 meters	per ton	1490.00	1490.00
Gravel truck load of 3½ cu. meters			
Blue Gravel	per tr. load	69.00	73.00
Rose Gravel	per tr. load	62.00	66.00
Cement, Std. Port. (Toltecs)	per ton	160.00	160.00
Lumber			
3rd Class Pine	per M ft.	850.00	850.00
1st Class Pine	per M ft.	1500.00	1500.00
2nd Class Pine	per M ft.	1300.00	1300.00

* 1st & 2nd floors. Aver rate $4.38

ENR Skilled Average: (Bricklayers, Carpenters, Iron workers): $3.186 **ENR Common Average:** $2.022

White Cross Hospital reports multiple savings after modernizing with

BAYLEY WINDOWS

Read these briefs from the official report:

By replacing swinging type solarium windows at end of corridors with Bayley Aluminum Projected Windows:

1. Daily coal consumption was reduced from 15 ton to 9 ton—a daily savings of $40 to $45.
2. Hallway radiators were eliminated—and still warmer than before.
3. Housekeeping was simplified by less dirt seepage.
4. Maintenance was reduced because of fewer moving window parts.
5. Hazard of patient escape through the windows was reduced.
6. Cost of periodic painting of windows was eliminated.
7. Interior and exterior appearance of building was enhanced.

Meet modern hospital demands for *better light, air and vision*

Just as others have proved! White Cross Hospital of Columbus, Ohio has found that modernizing by replacement of old style windows with modern Bayley Aluminum Projected Windows results in substantial economies. This is not to speak of improved building appearance, window operating convenience and other advantages from such features as:

Modern appearance • Economy—painting unnecessary • permanence—long care-free life • Simplicity—no complicated mechanism • Adaptable to all types of construction • Glazing outside—flat surface inside • Easily washed from inside • Prepared for screens • Permits use of accessories, such as draperies, shades, curtains, venetian blinds or awnings.

Combining all these merits with no-draft ventilation, awning-type weather protection, maximum light and vision area, it is easy to realize why there is such a growing preference for Bayley Aluminum Projected windows.

Call Bayley at the start of any plan to modernize. We'll gladly work with you—and through our years of specialized window experience we can very likely render extra consul in both the window selection and building alterations. No obligation.

75 Years of RELIABILITY

THE WILLIAM BAYLEY COMPANY

Springfield, Ohio

District Sales Offices: Springfield Chicago New York Washington



SAFE—DEPENDABLE MAYO ALL-STEEL HEADFRAMES

Because conditions vary so greatly from one mine or tunnel job to another, a careful analysis of your operation should be made before attempting the design or construction of a headframe. Our twenty-five years of experience on important installations in America, Europe and South America is at your disposal!

Write for Bulletin No. 20 or send details.

Steel Forms • Headframes • Muck Bins
Shields • Air Locks • Locomotives
Mine Cars • Grouters

MAYO

TUNNEL AND MINE EQUIPMENT
LANCASTER, PENNA.

Special Hoists
FROM STANDARD PARTS

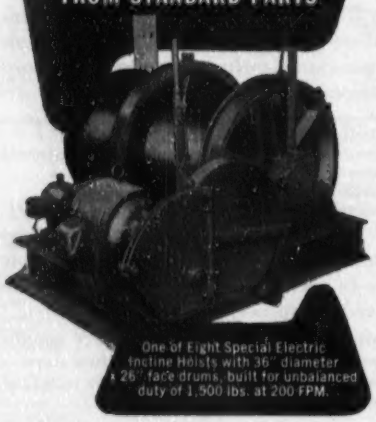

One of Eight Special Electric Incline Hoists with 36" diameter x 26" face drums, built for unbalanced duty of 1,500 lbs. at 200 FPM.

• By modifying and re-combining our standard parts, Superior-Lidgerwood-Mundy can engineer hoists to meet your specific requirements at the lowest possible cost.

Write for bulletins and catalogs

SUPERIOR LIDGERWOOD MUNDY CORPORATION

Main Office and Works: SUPERIOR, WISCONSIN, U. S. A.
New York Office, 7 Day Street, New York 7, N. Y.

CONSTRUCTION REPORTS — First Section

Bids Asked—Low Bidders—Contracts Awarded

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 36, N. Y., ELSIE EAVES, Manager

J. A. MAHONEY, M. O. WETZEL, L. M. WINISKI, M. E. SCIORRA, F. S. DEMBEK, Reports. J. H. WEBBER, M. R. ROESSLER, E. R. HUBER, Statistics.

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION

† **Mass., Falmouth**—HANGARS—BA 12/21—U. S. Eng., 857 Commonwealth Ave., Boston, two multi-purpose hangars, Otis Air Force Base, ENG-19-016-55-51, $800,000. Plans deposit $10 refundable, Charles T. Main, Inc., 80 Federal St., Boston, engr. CD 11/11.

▲† **Me., Limestone**—AIRFIELD PAVEMENTS—BA On Or About 3/1—U. S. Eng., 857 Commonwealth Ave., Boston 19, Mass., exten. airfield pavements, Loring Air Force Base, ENG-19-016-55-63, $2,500,000-$3,000,000. Plans deposit $15.

BIDS ASKED—BUILDINGS

Conn., Norwalk—SCHOOL—BA 12/14—City, Bd. Educ., c/o Supt. Schools, Norwalk, Honeyhill Elementary School, Midrocks Dr. $500,000. Plans deposit $50. Extended date. Cram & Young, 15 Belden Ave., archts. Walter E. Smith & W. A. Bulger, 82 Connecticut Ave., mech. engrs. CD 11/12.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **MASSACHUSETTS**—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,
Marinucci Bros. & Co., Inc., 51 Ceylon St., Dorchester, Mass. CA $5,407,181, est. $4,980,000. Sect. 2 hy. and bridge South East Expressway to Milton-Quincy Line, Boston, Milton and Quincy. CD 11/12, under LB.

† **A. J. Martini, Inc.**, 9 Jerome St., Medford, Mass. CA, $637,000, est. $800,000-$900,000. two maintenance hangars with shops, Hanscom Air Force Base, ENG-19-016-55-39, BEDFORD, MASS. U. S. Eng., 857 Commonwealth Ave., Boston, Mass. CD 11/23, under LB.

Peter Kiewit Sons Co., 490 Pleasant St., Pawtucket, R. I. CA $917,350, est. $900,000. Contr. 203, Sect. 4 relief sewer, Watertown, Newton and Waltham, BOSTON, MASS. State, Metropolitan Dist. Comn., Constr. Div., 20 Somerset St., Boston, Mass. CD 11/23, under LB.

▲† **Blount Bros. Constr. Co.**, Bell Bldg., Montgomery, Ala. CA $2,144,392, est. $2,500,000-$3,000,000. double cantilever hangar ground storage reservoir, pump station, Otis Air Force Base, ENG-19-016-55-33, FALMOUTH, MASS. U. S. Eng., 857 Commonwealth Ave., Boston, Mass. CD 11/9, under LB.

† **Theodore Loranger & Sons**, 404 Nash Rd., New Bedford, Mass. LB, $584,400, est. $500,000-$600,000. base warehouse, rocket storage, check out and assembly bldgs., engine build-up, Otis Air Force Base, ENG-19-016-55-40, FALMOUTH, MASS. U. S. Eng., 857 Commonwealth Ave., Boston, Mass. Bids Nov. 23. CD 11/16.

BUILDINGS

LOW BIDS AND CONTRACTS

Harvey Constr. Co., Inc., 450 Valley St., Manchester, N. H. CA Approx. $750,000. HOSPITAL, Notre Dame Ave., MANCHESTER, N. H. Hospital Notre Dame Des Lourdes, 337 Notre Dame Ave., Manchester, N. H. Bids Nov. 22. CD 11/8.

Poley Abrams Corp., 2 Elm Place, Brookline, Mass. CA, $938,400. Alcott Elementary SCHOOL, Laurel St. and addns. to Thoreau Elementary SCHOOL and HIGH SCHOOL, CONCORD, MASS. Town, Stow St., Concord, Mass. CD 11/3, under LB.

▲ **Mauro Constr. Co.**, 62 Bassett St., New Haven, Conn. Owner Builds, $1,800,000, 181 RESIDENCES "Mauro Acres" Foote St., HAMDEN, CONN.

▲ **Johnson Constr. Co.**, 50 Legewood Rd., West Hartford, Conn. Owner Builds. $1,200,000. 40 RESIDENCES, Tootin' Hills Extension, WEST SIMSBURY, CONN.

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION

New York—GARAGE and PORTAL FINISH—BA 1/4—At office of Chief Engineer of The Port of New York Auth., 111 8th Ave., New York, Zone 11, Contr. LT-160.016, constr. emergency garage and portal finish for the Third Tube of Lincoln Tunnel, New York Plaza. Plans deposit $30. CD 1/18.

▲† **N. Y., Plattsburg**—AIR FORCE FACILITIES—BA 1/4—U. S. Eng. 80 Lafayette St., New York, Zone 13, airforce facilities (FY 1955 program), paving and grading, incl. addnl. airfield pavement as extens. to existing runways, taxiways, and apron constructed by others, incl. clearing, grubbing, grading, subgrade load tests, drainage, installing apron appurtenances, install flush type fire hydrants, water mains, paving taxiway shoulders, constr. blast pads and area seeding, at Air Force Base, Serial No. ENG-30-075-55-205. $4,000,000-$5,000,000. Plans deposit $10. CD 10/15/52.

BIDS ASKED—BUILDINGS

▲ **Pa., Elizabethtown**—HOSPITAL—BA 12/22—Masonic Homes, Elizabethtown (selected list of bidders) Memorial Hospital. $1,750,000. Lawrie & Green, 321 N. Front St., Harrisburg, archts.

SOON LETS CONTRACT—BUILDINGS

▲ **N. Y., Mt. Vernon**—HOSPITAL WING—Mt. Vernon Hospital, N. 7th Ave., soon lets contract hospital wing. $1,500,000. Ferrenz & Taylor, 152 W. 42 St., New York, Zone 36, archts. CD 4/7.

▲ **Pa., North Wales**—PLANT—Leeds & Northrup Co., 4901 Stenton Ave., Phila., soon lets contract, mfg. plant. $4,000,000. L. Rossetti, Marquette Bldg., Detroit, Mich., archt. Giffels & Vallet, Inc., Marquette Bldg., Detroit, Mich., engr. CD 10/13.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

NEW JERSEY State Hy. Dpt., 1035 Parkway Ave., Trenton,
Utility Constr. Co., 84 Paterson St., New Brunswick, N. J., CA, $539,457, grading, paving 0.699 mi. Route 18 from Albany to Bishop Sts., New Brunswick, Middlesex Co. Bids Oct. 19, awarded Nov. 24. CD 10/28, under LB.

North End Lumber Co., 1512 N. Main Ave., Scranton, Pa., LB $124,695, general constr.;
H. N. Gardner, 920 Green Ridge St., Scranton, Pa., LB $81,653, piping and equipment for replacing sewage disposal plant and corrections to collection sys. at Clarks Summit State Hospital, CLARKS SUMMIT, PA. General State Auth., 18 and Herr Sts., Harrisburg, Pa. Bids Nov. 24. CD 10/27.

▲ **MARYLAND**—State Rds. Comn., 108 E. Lexington St., Baltimore, Zone 2,
Princemont Constr. Corp., 1138 Fern St., Silver Spring, Md. LB $1,298,580. grading, drainage, wid'n., surf. 3.11 mi. State Rte. 586, Wheaton-Rockville, Contr. M 526-2-320, Montgomery Co.;
Rea Constr. Co. & C. H. Lawson, Inc., Box 2015, Charlotte, N. C. LB $1,910,628. grading, drainage, surf. 7.07 mi. dual hy., Annapolis-Washington Expressway, Contr. P 736-16-320, Prince George Co.;
E. D. Plummer & Sons, 961 S. Main St., Chambersburg, Pa. LB $740,374. grading, drainage, wid'n., reloca-

PROJECTS COVERED

By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $34,000; other public works $60,000; industrial buildings $82,000; other buildings $300,000. Also Foreign projects of $100,000 and more in size of interest to American contractors.

By Regions & Classes of Construction

(In order of Listing)

BIDS ASKED
LOW BIDDERS
CONTRACTS AWARDED

New England
Middle Atlantic
South
Middle West
West of Mississippi
Far West

PROPOSED WORK

Water Supply
Sewers, Waste Disposal
Bridges
Streets & Roads
Earthwork, Waterways
Public Buildings
Mass Housing
Commercial Buildings
Industrial Buildings
Unclassified

In These Stages

PROPOSED WORK: Before and including appointment of engineers or architects.
BIDS ASKED: BA (new announcements only). For full calendar, see also preceding issues.

LOW BIDDERS: LB On jobs below $500,000 in value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: CA Except awards to low bidders previously reported in low bidder stage.

CD dates shown are of Construction Daily issue in which last previous report was published.

Symbols and Abbreviations Include:

† Federal Government
▲ Project of $1,000,000 or over.
ENR Engineering News-Record
CD Construction Daily

For additional reports see Construction Daily.

tion, surf. 6.793 mi. State Rte. 632, Downsville-Hagerstown, Contr. W 447-620, Washington Co. Bids Nov. 18. CD 11/3.

▲ **MARYLAND**—State Rds. Comn., 108 E. Lexington St., Baltimore, Zone 2,

Wilmouth Paving Co., First and P Sts. S.E., Wash. 3, D. C. LB $1,978,050. grading, surf. 3.193 mi. New Hampshire Ave. District Line to Montgomery Co. Line, near Wash., D. C., Contr. P 736-2-320, Prince George Co.;

Taylor & Keebler, Inc., Box 121, Clinton, Va. LB $529,220. surf. 5.08 mi. State Rte. 5, Leonardtown, Contr. SM 300-2-250, St. Marys Co.;

M. J. Grove Lime Co., Lime Kiln, Md. LB $454,526. surf. 3.234 mi. State Rte. 64, Cavetown, Contr. W 448-620, Washington Co.;

project rescinded, grading, drainage, relocation, surf. 3.75 mi. State Rte. 113 near Berlin, Contr. W 332-4-120, Worcester Co. Bids Nov. 23. CD 11/3.

▲† **Lycoming Constr. Co., Inc.**, Williamsport, Pa. LB $2,525,404. airfield imprvs., extens., ENG-18-020-55-19, ABERDEEN PROVING GROUND, MD. U. S. Eng., 24 St. and Maryland Ave., Baltimore, Md. Bids Nov. 24. CD 11/1.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Regis Park Homes**, c/o Edelson Realty Co., Inc., 109 W. Main St., East Islip, N. Y. Owner Builds. $2,000,000. 200 HOUSES, Sunrise Hy. and Brook Ave., BAY SHORE, N. Y.

▲ **Norman Raben**, c/o Bonded Realty Corp., Sunrise Hy., Lindenhurst, N. Y. Owner Builds. $1,000,000. 100 HOUSES, Sunrise Hy., LINDENHURST, N. Y.

▲ **George A. Fuller Co.**, 597 Madison Ave., New York, N. Y. CA Approx. $15,000,000. 34 story HEADQUARTERS BLDG., Park Ave., 52 and 53 Sts., NEW YORK, N. Y. Seagram Distillers Corp., 405 Lexington Ave., New York 17, N. Y. CD 7/14.

New Elk Development Corp., 303 Fourth Ave., New York 10, N. Y. Separate Contracts. $750,000, APARTMENT, 994-1000 First Ave., NEW YORK, N. Y. CD 3/12.

▲ **Lex.-56 Corp.**, 50 E. 42 St., New York 17, N. Y. Separate Contracts. $1,750,000, APARTMENT, 667-76 Lexington Ave., NEW YORK, N. Y. CD 3/19.

Midtown Estates, Inc., 50 E. 42 St., New York 17, N. Y., Separate Contracts. $900,000, APARTMENT, 150-58 E. 56 St., NEW YORK, N. Y. CD 3/17.

McLean Avenue Realty Corp., 825 E. 140 St., New York 54, N. Y. Separate Contracts. $768,000. 6 story APARTMENT, Virco Ave. and McLean Ave., NEW YORK, N. Y. CD 7/28.

Pine View Apartments, c/o Seelig & Finkelstein, archts., 153 Pierrepont St., Brooklyn 2, N. Y. Owner Builds. $500,000. 3 story APARTMENT for 55-families, 309 North Broadway, YONKERS, N. Y.

Hollywood Homes, c/o Edwin A. Garry, 950 Red Road, Teaneck, N. J. Owner Builds. $600,000. 26 HOUSES on tract on Washington Ave. and Beechwood Dr., WASHINGTON TWP., N. J.

▲ **Arrowhead Homes**, c/o Ray Bell & Assocs., 1921 Morris Ave., Unionville, N. J. Owner Builds. $2,200,000. 100 HOUSES on tract on Rahway Ave., WESTFIELD, N. J.

▲ **McCloskey & Co.**, 1620 W. Thompson St., Phila., Pa. CA $3,000,000. OFFICE BLDG. (alterations from hotel), PHILA., PA. Pennsylvania Lumberman's Mutual Insurance Co., Market St. Natl. Bank Bldg., Phila., Pa. Bids Sept. 29. CD 9/15.

The Lacchi Constr. Co., 330 N. Charles St., Baltimore 1, Md. CA $734,700. 1 story, masonry Perry Hall Elementary SCHOOL, Perry Hall, TOWSON, MD. Baltimore Co., Bd. Educ., Aigburth Rd., Towson, Md. CD 11/23, under LB.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION

▲ **Ky., Louisville**—BA 12/17—Metropolitan Sewer Dist., 414 W. Jefferson St., Contr. 162, Upper Dry Run Trunk Sewer, Sect. C, 2,347 ft. 12x19 ft. rein.-con. inverted egg sewer, necessary manholes, $1,000,000. Plans deposit $50, Morris Forman, city engr. CD 4/22/48.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† **VIRGINIA**—Bureau P. Rds., Dpt. Commerce, 1440 Columbia Pike, Arlington,

Robertson-Henry Co., Box 2078, Huntington, W. Va. LB $1,077,915, Proj. 1F10-1G2, tunnel and bridge, etc. 12.678 mi. Blue Ridge Parkway from Rte. U. S. 60 to Otter Creek Bridge No. 2, Amherst and Rockbridge Counties. Bids Nov. 23. CD 11/1.

GEORGIA—State Hy. Dpt., Atlanta,

R. G. Foster & Co., Wadley, Ga., CA, $531,482 wid'n., resurf 17.853 mi. Augusta to Thomson Rd. S.R. 12, McDuffie, Columbia and Richmond Counties. Awarded Nov. 12. CD 11/19, under LB.

CEMENT GUN COMPANY RESTORES 15 MILLION GALLON RESERVOIR WITH "GUNITE"

This 15 million gallon reservoir of a large Virginia municipality was made "better than new" with a 2" thick "GUNITE" lining placed by a Cement Gun Company crew. The structure had been leaking badly through construction joints and required grouting behind the slopes in order to fill voids formed by the leakage. With reinforcing mesh in place, we applied "GUNITE" to the slopes and out 8 feet on bottom. Results were so pleasing to city officials that we were asked to repair an adjacent 5 million gallon reservoir.

Free Bulletin A3000 illustrates many examples of repair and new construction completed with "GUNITE" by the Cement Gun Company. A request on your letterhead will bring a copy by return mail.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES – ALLENTOWN, PA., U. S. A.

MANUFACTURERS OF THE "CEMENT GUN"

Good Service Is A Habit At CONNORS

"The steel you need delivered *where* and *when* you want it"—

Living up to that motto has become a *habit* at Connors. So check with us before placing your next order for reinforcing steel.

Cut and fabricated to your exact specifications, Connors Rebars are just hours away from any point in the South. Call, write or wire us—

CONNORS STEEL DIVISION
H. K. PORTER COMPANY, INC.
OF PITTSBURGH
P. O. BOX 2562 • BIRMINGHAM, ALA.

CONNORS PRODUCTS:

- Bulb-Tees
- Concrete Reinforcing Bars
- Hot Rolled Strip
- Merchant Bars
- Special Sections
- Highway Sign Posts
- Studded T Fence Posts
- Tobacco Hogshead Hoop

"now she's got more **GUTS** than ever!

Northwest Shovel repowered with D-326 "Cat" equipped with S-N Model 2255-12/3054-7.

thanks to S-N reduction gears"

says the Valley Sand and Gravel Company, Scottsville, New York

Yes Sir, with her new "cat" engine and those famous S-N heavy duty herringbone Reduction Gears, this work-hardened Northwest Shovel stands up to the rugged daily grind of tough schedules thanks to the smooth transmission of full power from engine to load by S-N Reduction Gears with Cut-off Clutches. Can be installed as original equipment, too, with all types of engines from 40 H.P. units to 755 H.P. giants. Available in broad range of reduction ratios — 1.5:1 to 4:1. *Write industrial division for catalog sheets.*



SNOW-NABSTEDT

Transmission Engineers

FOR NEARLY HALF A CENTURY

INDUSTRIAL DIVISION

THE SNOW-NABSTEDT GEAR CORP., HAMDEN, CONN.

CORE DRILLING

SERVICE AND SUPPLIES

TEST BORINGS FOR FOUNDATIONS

SOIL SAMPLING

GROUT HOLE DRILLING

A COMPLETE LINE OF DIAMOND CORE DRILLS, OPERATING EQUIPMENT AND DIAMOND BITS. SEND FOR BULLETIN 86 AND CATALOG 200.

E. J. **Longyear** CO.

MINNEAPOLIS

NEW YORK CITY SALT LAKE CITY

SIMPLEX Center Hole Hydraulic PULLERS

Perfected for

PRESTRESSING CONCRETE



TEMPLETON, KENLY & CO. Broadview, Illinois

2553 Gardner Road

▲ **GEORGIA**—Georgia State Toll Bridge Authority, 2 Capitol Sq., Atlanta,
American Bridge Div., U. S. Steel Corp., 525 Wm. Penn Pl., Pittsburgh 30, Pa., CA, **$3,677,480,** Contrs. 2 and 3, Turtle River Bridge, Glynn Co.;
Seaboard Constr. Co., Brunswick, Ga., CA, **$530,074,** Contr. 4 for superstructure of Turtle River Bridge, Glynn Co. Bids Sept. 3, awarded Nov. 2. CD 9/10, under LB.

▲ **FLORIDA**—State Road Dpt., Tallahassee,
Marion Constr. Co., Ocala, Fla., CA, **$789,957.** limerock base wid'n. and overbuild, sects. new limerock base, bit. surf. tr. c. conc. 17.234 mi. State Road 500, Job 3607-109, Marion Co.;
M. J. Carroll Constr. Co., Box 822, Leesburg, Fla., CA, **$1,371,351.** c. conc., concrete curbs, gutter, sidewalks, storm sewers, wid'n. one 30.5 ft. concrete bridge, 12.347 mi. State Rds. 500 and 600 Job 7501-102, Orange Co. Bids Nov. 1, awarded Nov. 19. CD 11/8, under LB.

† **B. B. Saxon,** Montgomery, Ala., CA **$352,359.** rehabilitation of buildings, warehouses and shops at Auxiliary Field No. 9, ENG-01-076-55-34, EGLIN AIR FORCE BASE, FLA. U. S. Eng., P. O. Box 1169 Mobile, 7, Ala. Bids Oct. 28. CD 10/18.

KENTUCKY—Commonwealth of Ky., Dpt. Hys., Frankfort,
Nally & Gibson and Geoghegan & Mathis, Bardstown, Ky. CA **$630,000.** b. conc. Class I surf. 6.675 mi. Glasgow-Edmonton Rd., F 543 (1), SP 5-52, SP 85-84, Barren and Metcalfe Counties. CD 11/26 under LB.

TENNESSEE—State Hy. Dpt., Nashville,
Oman Constr. Co., P. O. Box 146, Nashville 2, Tenn. CA **$550,491,** crushed stone and bit. materials surf., constr. bridge over Clinch River 2.202 mi. sect. State Rte. 32, Proj. No. F-032-3-(2), Claiborne and Grainger Counties. Bids Sept. 24. CD 9/30, under LB.

MIDDLE WEST

BIDS ASKED—BUILDINGS

Mich., Redford—SCHOOL—BA 12/15—Redford Union School Dist. No. 1, 26440 Puritan St., elementary school, Mich. 54-C-401-AA, $550,000. Plans deposit $50 refundable, Earl G. Meyer, 806 Farwell Bldg., Detroit, archt. CD 8/9.

Wis., De Pere—DORMITORY—BA 12/17—St. Norbert College, De Pere, dormitory, $600,000. Plans deposit $25. Foeller, Schober, Berners, Safford & Jahn, 310 Pine St., Green Bay, archts. CD 4/6.

SOON LETS CONTRACT—BUILDINGS

Ill., Glenview—PLANT—Signode Steel Strapping Co., 2600 N. Western Ave., Chicago, soon lets contract first unit, steel strapping plant, sewers, water, paving, landscaping, near here. $500,000. Skidmore, Owings & Merrill, 100 W. Monroe St., Chicago, Zone 3, archts. R. W. Hazekamp, 12761 S. Wallace St., Chicago, landscaping. CD 6/30.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **George Sheaf & Co., Inc.,** 449 Neilston St., Columbus, O., CA **$1,808,774.** structural work to expand water filtration plant at Collins Park, TOLEDO, O. City. City Hall, Toledo, O. Bids Nov. 3, awarded Nov. 17. CD 11/9, under LB.

▲ **Santucci Constr. Co.,** 5035 Church St., Skokie, Ill., CA, **$1,556,800,** Howard St. Intercepting Sewer, Skokie, CHICAGO, ILL. Sanitary District of Chicago, 910 S. Michigan Ave., Chicago 5, Ill. Bids Oct. 14, awarded Nov. 22. CD 11/8, under LB.

▲ **MICHIGAN**—State Hy. Dpt., Stevens T. Mason Bldg., Lansing,
A. Lindbergh & Son, Inc., Ishpeming, Mich. CA **$1,060,138.** concrete dual 6.17 mi., F 52-40 C1-R, F 52-40, etc., Marquette Co.;
I. L. Whitehead Co., Sault Ste Marie, Mich. CA **$530,664.** stabilized aggregate surf. 5.4 mi. M-35, SS 7-16 C3-U, SS 7-16 C4-R (S 306 2), Baraga Co. CD 11/24, under LB.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Miletti Constr. Co.,** 2473 State St., Akron, O. CA **$1,008,436,** general constr.;
Zindle Plumbing & Heating Co., 1055 S. Main St., Akron, O., CA **$326,440,** plumbing and heating for South HIGH SCHOOL, Wooster Ave., AKRON, O. Bd. Educ., 70 N. Broadway, Akron, O. Bids Oct. 15, awarded Nov. 22. CD 11/1, under LB.

Shepard & Rogers Constr. Co., Silver Hills, New Albany, Ind., LB **$345,470,** 206x359 ft., L-shaped, brick over concrete block, JUNIOR HIGH SCHOOL, SCOTTSBURG, IND. Scottsburg-Vienna Township Bldg. Corp., Scottsburg, Ind. Bids Nov. 23. J. M. Rotz Eng. Co., Merchant Bank Bldg., Indianapolis, Ind., engr.

▲ **Coath & Goss,** 5103 Lake St., Chicago, Ill., CA, **$1,962,735,** police traffic OFFICES and traffic COURTS, rebuilding WHOLESALE GROCERY, 325 N. La Salle St., CHICAGO, ILL. City, City Hall, Chicago, Ill. Bids Sept. 13, awarded Nov. 22. CD 9/29, under LB.
Fred Berglund & Son Co., 8410 S. South Chicago Ave., Chicago, Ill., CA, **$500,000,** SCHOOL, CHURCH and CONVENT, CHICAGO, ILL. St. Walter's Parish, 11755 S. Western Ave., Chicago, Ill. Bids Nov. 14, awarded Nov. 19. CD 11/9.
Erik Borg Co., 6649 Ridge Rd., Chicago, Ill., CA, **$590,000** HIGH SCHOOL, GYMNASIUM, 87 and Kedzie Sts., CHICAGO, ILL. Lutheran High School Assn., 77 W. Washington St., Chicago 2, Ill. Bids Nov. 4, awarded Nov. 18. CD 10/21.
Lamp Constr. Co., 112 Division St., Elgin, Ill., CA, **$586,437.** Dundee High SCHOOL, DUNDEE, ILL.

(Continued on page 90)

How DUKE POWER COMPANY moves the *REALLY BIG* loads

Two WHITE tandems move 300,000 lb. transformers

(A) LOADING UP this bulky load is a mean job. Here the transformer is moved onto the low-boys pulled by two husky White Model WC2864's, ready to go!

(B) ON ITS WAY, the huge transformer moves by White Mustang Power to the station ½ mile away. Plenty of Mustang Power here!



(C) MISSION COMPLETED, the rugged Whites stop at the end of the trip, turn the 300,000 lb. transformer over to the riggers.

PROBLEM: To move two 300,000 lb. transformers to a new station of the Duke Power Co., Spartanburg, S. C., not accessible by surfaced road or spur track.

SOLUTION: Two White Model WC2864 Tractors with low-boy trailers handled these big loads without delay or difficulty. Operating side-by-side, from siding to plant site, these rugged Whites had plenty of power . . . dependable all the way.

FOR YOUR REALLY *BIG* MOVING JOBS . . .

See your White Representative for latest power equipment news as it pertains to your business. New White Trucks save time . . . cut costs . . . get more work done because they are exactly tailored to actual job needs. Call or write today for facts.

THE WHITE MOTOR COMPANY
Cleveland 1, Ohio

White

FOR MORE THAN 50 YEARS THE GREATEST NAME IN TRUCKS

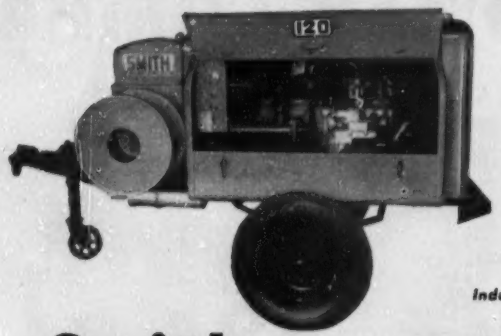

Model 120-P

Powered by CHRYSLER Industrial Engine

Smith 120-P air compressor

Operates all these tools—for less!

- ✓ Two 80-lb. paving breakers.
- ✓ Two 80-lb. sheeting drivers.
- ✓ One 50-lb. rock drill.
- ✓ Four backfill tampers, or two concrete vibrators.

Write for complete facts and names of nearest dealer!

CUTTING COSTS FOR CONTRACTORS— Maine to California!

The Smith 120-P gives operating economy that big compressors can't approach. Goes where big, bulky compressors can't go. Powered by heavy-duty Chrysler Model 22 Industrial Engine. Simple, compact design—minimum fittings, gaskets, etc. to break down or cause trouble. No couplings, no clutch. Finned aftercooler reduces air temperature approx. 200°, gives longer hose life!

Also the Smith 70-P Compressor

GORDON SMITH & CO., Inc.

430 College Street
Bowling Green, Kentucky

Don't Let the Wrong BUCKET PICK YOUR POCKETS

When a bucket's too small, you lose pay load with every pass. When it's oversize, equipment wears out before its time. Either condition will pick your pockets systematically.

To be sure you have the right unit for the job, let Erie's field engineers survey your requirements. There's no charge. And you can be sure they'll come up with a helpful suggestion. They usually do.

Write for BULLETIN 403, Dept. R-124

FORMERLY ERIE STEEL CONSTRUCTION COMPANY

ERIE STRAYER Co.

SAME PEOPLE • SAME PRODUCTS • JUST A NEW NAME

2124 GEIST ROAD • ERIE, PENNSYLVANIA

(Continued from page 88)

School District 30, Southwestern Ave., Carpentersville, Ill. Bids Nov. 10, awarded Nov. 19. CD 11/4.

Power Constr. Co., 212 S. Marion St., Oak Park, Ill., CA, $700,000, Howard JUNIOR-HIGH SCHOOL addn., WILMETTE, ILL. School District 39, 738 10 Ave., Wilmette, Ill. Awarded Aug. 22. CD 7/12.

Alfred A. Smith, 721 E. Saratoga St., Ferndale, Mich. CA Est. $500,000. WAREHOUSE addn., alterations, Hamilton and Holden Sts., DETROIT, MICH. Pittsburgh Plate Glass Co., 6045 Hamilton St., Detroit, Mich. CD 11/17.

▲ George W. Lathrop & Sons, Inc., 1510 Montcalm St., Toledo, O. CA $2,267,200, general contract;
Dart & Cady, Mason, Mich. CA $686,599, plumbing, heating and ventilating contracts;
Hatzel & Buehler, Inc., 862 Penobscot Bldg., Detroit, Mich. CA $414,000. electric contract for ANIMAL INDUSTRIES BLDG., Michigan State College, EAST LANSING, MICH. State, A. N. Langius, dir. State Bldg. Dpt., Lewis Cass Bldg., Lansing, Mich. Grand total $3,367,807. Bids Nov. 3. CD 10/13.

▲ Christman Co., 408 Kalamazoo Bldg., Lansing, Mich. LB $1,720,547. 30 APARTMENT BLDGS. for married students, Michigan State College, EAST LANSING, MICH. State, A. N. Langius, dir. State Bldg. Dpt., Lewis Cass Bldg., Lansing, Mich. Bids Nov. 19. CD 10/29.

▲ Ward W. Ross, Inc., Pontiac, Mich. LB $1,175,400. general contract;
Marion Branz Co., Ironwood, Mich. LB $373,000. mechanical contract for HIGH SCHOOL, EAST LANSING, MICH. City, C. E. MacDonald, supt. Schools, East Lansing, Mich. Bids Nov. 23. CD 10/21.

▲ Biltmore Building Co., 17615 James Couzens Dr., Detroit 33 Mich. Owner Builds. $3,000,000. 300 brick single HOUSES, Deering, Cardwell and Warren Sts., INKSTER, MICH.

▲ Angelo Real Estate Co., 13247 Dix Toledo Hy., Trenton, Mich. Owner Builds. $1,100,000. 100 brick HOMES, Grange, West Rd., Newman Dr., TRENTON, MICH.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

▲† Tex., Ellington Air Force Base — HANGAR — BA 12/23—U. S. Eng., Box 1229, Galveston, 40,584 sq. ft. A/C maint. hangar, structural steel frame; 2 story shop lean-to; same type, 14,302 sq. ft., relocation of seven existing frame bldgs., utilities, etc., Inv. No. ENG-41-243-55-25. $750,000-$1,750,000. Extended date. CD 11/15.

BIDS ASKED—BUILDINGS

▲ Mo., Warrenton—MONASTERY—BA About 2/15—Passionist Fathers, Very Rev. Nell Parsons, provincial for Western U. S., 7101 Natural Bridge Rd., Normandy, Zone 21, constr. group bldgs., incl. monastery, seminary, retreat house for laymen, 468 acre tract on Boone's Lick Rd. 1 mi. from U. S. No. 40, $2,000,000. CD 9/8/54.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† Pierre Constructors (Russ Mitchell, Inc., 5304 Old Spanish Trail, Houston, Tex., W. A. Smith Contg. Co., Inc., 1401 Fairfax Trafficway, Kansas City, Mo., and Bruce Constr. Co., Fort Worth, Tex.), LB $4,792,636, outlet works, Stage II, Oahe Reservoir, CIVENG-25-066-55-40, SOUTH DAKOTA. U. S. Eng., 1709 Jackson St., Omaha, Neb. Bids Nov. 23. CD 10/13.

† Tex-Davis Constr. Co. and A. E. Kroling, Mahtomedi, Minn., LB $606,633, reservoir clearing, Stage I, Gavins Point Reservoir Proj., Inv. 25-066-55-15, SOUTH DAKOTA. U. S. Eng., 1709 Jackson St., Omaha, Neb. Bids Nov 24. CD 11/23.

Morrison-Knudsen Co., Inc., 411 W. 5 St., Los Angeles, Calif., CA $875,000, laying 49.3 mi. main railway track between Sanger and Dallas, TEXAS. Atcheson, Topeka & Santa Fe Ry. Sys., T. A. Blair, Ch. Engr. (Sys.), 80 E. Jackson Blvd., Chicago 4, Ill. (parent railway for Gulf, Colorado & Santa Fe Ry. Co., Galveston, Tex.). CD 8/24.

† A. J. Rife Constr. Co., 2608 Inwood Rd., Dallas, Tex. LB $663,430, est. $730,355, squadron headquarters and operations bldg., Abilene Air Force Base, ENG-41-443-55-37, ABILENE, TEX. U. S. Eng., 100 W. Vickery Blvd., Fort Worth, Tex. Bids Nov. 23. CD 11/12.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ E. B. L. Eckberg, 5015 Emerson Ave. N., Minneapolis, Minn. Owner Builds. $1,700,000. 78 DWELLINGS between 61 and 62 Sts. from Lyndale Ave. Southwest to new Hy. 65, within city limits, MINNEAPOLIS, MINN.

C. F. Haglin & Sons Co., 123 Bryant Ave. N., Minneapolis, Minn. CA Est. $800,000. general contract 3 story BUILDING addn. on top of "North" Bldg. at Third St. and Fourth Ave., modernize 4 passenger elevators, MINNEAPOLIS, MINN. Minneapolis Grain Exchange, G. Wilkens, secy., Fourth Ave. S. and Fourth St., Minneapolis, Minn. E. J. Prondzinski, 110 W. 26 St., Minneapolis, Minn., archt.

▲ Hipp's Constr. Co., 5912 Beard Ave. S., Minneapolis, Minn. CA est. $2,000,000. 180 HOMES along 57 Ave. North and adjacent streets east of Osseo Rd., MINNEAPOLIS, MINN. Pioneer Realty Co., 1910 Lowry Ave. N., Minneapolis, Minn., and Hipp's Constr. Co., 5912 Beard Ave., Minneapolis, Minn.

▲ Ellsworth Breihan, 8550 General Grant Lane, Affton 23, Mo. Owner Builds. $2,000,000. 230 addnl. RESIDENCES in General Grant Hills subdivision on

(Continued on page 92)

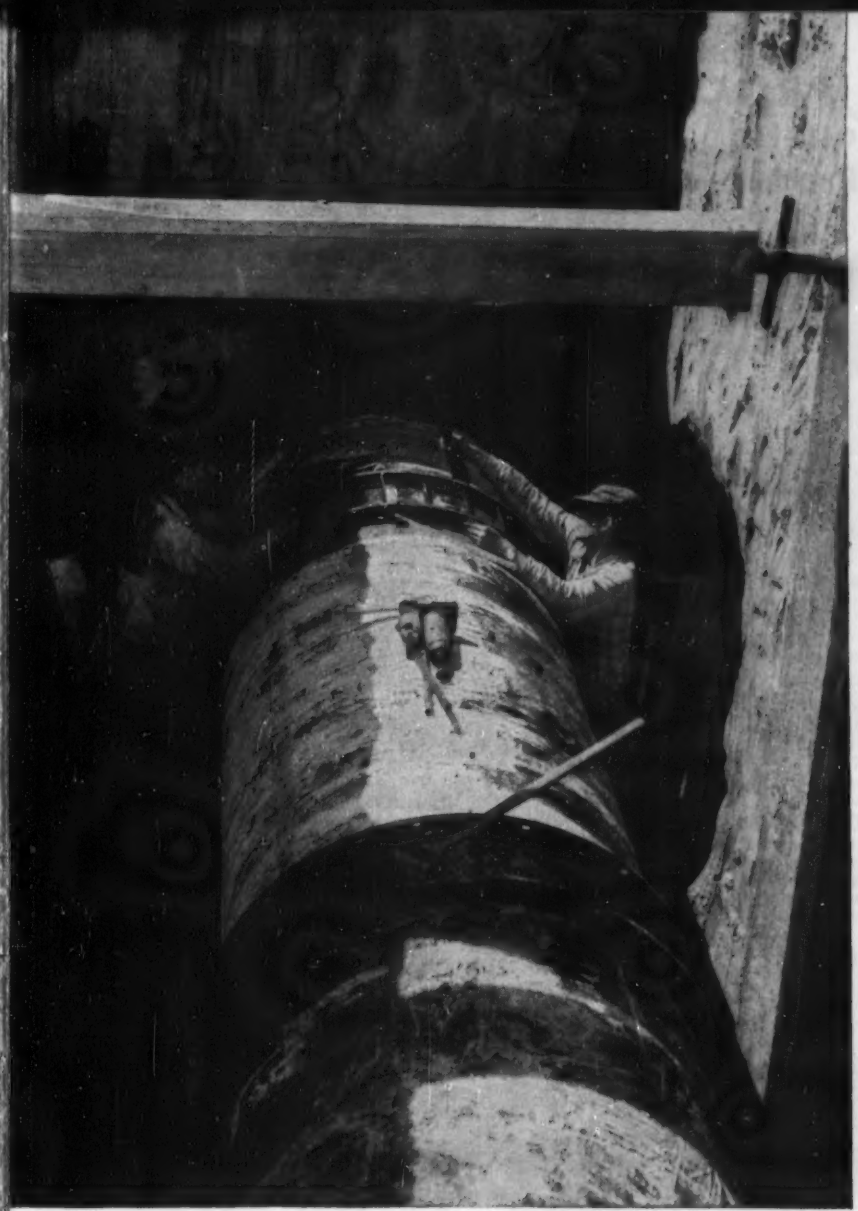

DELIVERING WATER CHEAPER

OMAHA, NEBRASKA
To avoid serious traffic jams while constructing its 48" pump discharge line through busy Omaha, Metropolitan Utilities District engineers constructed a 200-foot tunnel 25 feet below ground level. The half-mile Dresser-Coupled steel line will deliver water to a new reservoir.

Busy Traffic Scarcely Knew It

OMAHA AVOIDS TIE-UPS LAYING DRESSER-COUPLED STEEL LINE THROUGH TUNNEL

Like Omaha, growing cities everywhere are thoroughly familiar with the many advantages of steel water pipe joined with Dresser Couplings.

This modern type of construction provides city engineers and contractors with a virtually "packaged pipe line"—easy to lay out and assemble, readily adaptable to job conditions, predictable as to cost.

And speaking of costs, lighter weight steel pipe reduces budget expenditures for installation. Long, strong pipe lengths call for fewer joints, speed job completion. And flexible, bottle-tight Dresser Couplings go on fast, eliminate many specials, make leakage allowance for joints unnecessary. Resilient Dresser gaskets absorb shock, vibration.

In addition to assuring low over-all installed cost, a Dresser-Coupled steel water line sustains high carrying capacity, "lives in the ground" without maintenance . . . results in *delivering water cheaper.*

✓ ***BE SURE*** **you get the best line at the best price. Always put steel pipe and Dresser Couplings in your specifications.**

DRESSER®

SAVE TIME · MONEY AND TROUBLE — THE DRESSER WAY

Dresser Manufacturing Division, 318 Fisher Ave., Bradford, Pa. (One of the Dresser Industries). Warehouses: 1121 Rothwell St., Houston; 101 S. Airport Blvd., S. San Francisco. Sales Offices also in: New York, Philadelphia, Chicago, Toronto.

SOIL-CEMENT PROCESSING of Mountain Highway Sets Production Record

with the Help of this

WISCONSIN HEAVY-DUTY Air-Cooled ENGINE

Morrison-Knudsen purchased two Seaman Trav-L-Plants, built by Seaman Motors, Inc., Milwaukee, Wis., for one-mile-a-day production of high quality soil-cement base.

Road materials pulverized, mixed, blended and correctly assembled for maximum strength and durability require accuracy in processing and precision in moisture and depth control. Cut at lower right shows Seaman method of efficient binder application and the elimination of a segregated aggregate condition by the correct assembly of coarse and fine particles.

The Wisconsin engine provides a uniform flow of water or bituminous binder to the materials during mixing operation. Picture shows the Seaman in a mixing operation, preparatory to liquid application.

This is just another typical power assignment in which Wisconsin Heavy-Duty Air-Cooled Engines play important roles. Construction contractors, equipment designers and builders . . . men who are most familiar with power equipment service demands . . . specify "WISCONSIN ENGINES" as their best guarantee of dependable service and low-cost maintenance.

You can't do better than to specify "WISCONSIN" for *your* equipment. Write for Bulletin S-164.



Model VG4D Wisconsin Heavy-Duty Air-Cooled Engine specified as standard equipment on Seaman Trav-L-Plant. Equipped with Stellite exhaust valves and valve seat inserts and valve rotators for long engine life and minimum servicing.



WISCONSIN MOTOR CORPORATION

World's Largest Builders of Heavy-Duty Air-Cooled Engines

MILWAUKEE 46, WISCONSIN

A 8116-½-I

Chain Sets for Dragline Buckets

Page

WRITE FOR CATALOG

GENUINE REPAIR PARTS

CLEARING POST OFFICE • CHICAGO 38, ILL.

Steel Barges

Revolving Cranes

10 to 200 tons Capacity
Barge Mounted or on land
Stiff Leg and Guy Derricks

THE HAVRE DE GRACE SHIPYARD, INC.

Havre de Grace, Md.

(Continued from page 90)

U. S. No. 66 west of Laclede Station Rd., AFFTON (ST. LOUIS 23 P.O.), MO. CD 12/4/47.

▲ **John Epple Constr. Co.**, 1417 Hickory St., Columbia, Mo. CA $1,742,000. general contract;

C. Wallace Plumbing Co., 2224 Summer St., Dallas, Tex. CA $912,531. plumbing and heating for 5 story MEDICAL SCIENCE BLDG., COLUMBIA, MO. Curators of Missouri University, c/o Leslie Cowan, secy., Jesse Hall, Columbia, Mo. Bids Nov. 10, awarded Nov. 20. CD 11/24, under LB.

▲ **Chalmers & Borton Constr. Co.**, Box 1031, Hutchinson, Kan., CA Approx. $4,000,000. 6-million bu. GRAIN ELEVATOR, LINCOLN, NEB. C-G Grain Co., National Bank of Topeka, Bldg., Topeka, Kan. CD 9/13.

▲ **Thad Dederick Constr. Co.**, Box 13067, River Oaks Station, Houston, Tex., LB $1,148,404, 4 story, 60,000 sq. ft. HOTEL, 110 rooms, ORANGE, TEX. Orange Community Hotel Co., Orange, Tex. Holabird & Root & Burgee, 180 N. Wabash St., Chicago, Ill., consult. archts. Bids Nov. 17. CD 10/12.

▲ **Olsen Co.**, Scanlan Bldg., Houston, Tex., CA $1,125,000, recycling PLANT; CA $90,000, loading and unloading facilities for recycling plant; CA $85,500, PRODUCTS STORAGE UNIT; CA $85,000, some crude oil lines, 6 mi. southeast of SILSBEE, TEX. Grand total $1,385,500, American Republics Corp. and Houston Oil Co. of Texas, Petroleum Bldg., Houston, Tex. CD 9/23.

FAR WEST

BIDS ASKED—BUILDINGS

▲ **Wash., Seattle**—SCHOOL—BA 12/21—Highline School District, 401,253 S. 152 St., 5 rein.-con. buildings totaling 106,000 sq. ft. for Lakewood Junior-Senior High School, 10 Ave. S. W. and S. W. 116 St. with low-pressure steam heating $1,000,000. Plans deposit $50. for general; $25 each for mechanical and electrical. Steinhart, Stanley & Theriault, Medical Arts Bldg., archts. CD 4/29.

Calif., San Jose—SCHOOL—BA 12/22—San Jose City Unified School District, 408 Almaden Ave., Markham Junior High School and Willow Glen Senior High School. $750,000. Kress, Goudie & Kress, 363 Park Ave., archts. CD 2/15.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

† **Morrison-Knudsen Co., Inc.**, 411 W. 5 St., Los Angeles, Calif., CA, $634,476, est. $643,894. earthwork, concrete lateral lining, structures for Unit 4, Mohawk Distribution Sys., Gila Proj. Spec. DC 4273, ARIZONA. Bureau Reclamation, Dpt. Interior, Yuma, Ariz. Bids Nov. 18. CD 10/12.

† **Morrison-Knudsen Co., Inc.**, 411 W. 5 St., Los Angeles, Calif., CA, $816,744, est. $681,329, earthwork, concrete lateral lining, structures for Unit 2, Domean Wellton-Mohawk distribution sys., Gila Proj. Spec. DC 4258, ARIZONA. Bureau Reclamation, Dpt. Interior, Yuma, Ariz. Bids Nov. 3, awarded Nov. 18. CD 11/10, under LB.

▲ **WASHINGTON**—State Hy. Comn., Olympia,
Roy T. Earley Co., 321 Middle Waterway, Tacoma, Wash., CA, $1,008,944, rein.-con. T-beam bridge and timber pile trestle on 0.315 mi. Secondary State Hy.-1-K, approach to First Ave. S. Bridge in Seattle, Sch. D, F.A.P. U-001-3 (8), King Co. Bids Nov. 16, awarded Nov. 17. CD 11/19, under LB.

▲ **CALIFORNIA**—State Div. Hys., P. Wks. Bldg., Sacramento,
C. K. Moseman, 727 Barron Ave., Redwood City, Calif., LB $370,218, grading, surf. and 3 rein.-con. bridges 5.5 mi. Mt. Whitney Ave., Fresno Co.;
A. G. Raisch Co., Box 458, San Rafael, Calif., LB $1,192,962, surf. 3.7 mi. also line tunnels, lighting etc., Marin Co.;
Granite Constr. Co., Box 900, Watsonville, Calif., LB $1,512,027, grading, paving, 6 rein.-con. bridges 5.1 mi. Sacramento Co. Bids Nov. 17. CD 10/26.

▲ **CALIFORNIA**—State Div. Hys., 120 S. Spring St., Los Angeles,
Winston Brothers Co., 1532 S. California Ave., Monrovia, Calif., CA $2,812,322 grading 4.2 mi., 7 bridges on Ramona Freeway, West Covina, Los Angeles Co. Bids Oct. 21, awarded Nov. 16. CD 11/4, under LB.

† **Clarence Ward Constr. Co.**, 4623 E. Harvey Ave., Fresno, Calif., CA, $519,059, 4 single story concrete, masonry UNIT BLDGS., for shops, utilities, parking areas, etc., ENG-04-203-55-24, CASTLE AIR FORCE BASE, CALIF. U. S. Eng., 180 New Montgomery St., San Francisco, Calif. Bids Nov. 18, awarded Nov. 22. CD 11/4.

▲ **Pittsburgh-Des Moines Steel Co.**, Box 329, Santa Clara, Calif., CA, $2,000,000, wind tunnel, TORRANCE, CALIF. North American Aviation, Inc., 5800 Avion Dr., Torrance, Calif.

BUILDINGS

LOW BIDS AND CONTRACTS

Bell & Valdez, 1044 116 St. N. E., Bellevue, Wash., Day Labor, $817,500, 66 HOUSES, S. E. 40 and 146 Ave. S. E., BELLEVUE, WASH.

Brazier Constr. Co., 309 Pontius St., Seattle, Wash., LB, $613,000 general contract 1 story, 79,045 sq. ft. rein.-con., steel HIGH SCHOOL, East Bremerton, BREMERTON, WASH. School District No. 100C, 16 and Chester Sts., Bremerton, Wash. Bids Nov. 23. CD 10/28.

Wall, Bartram & Sanford, Junction City, Ore., LB, $736,047, 7 rein.-con. HIGH SCHOOL BLDGS., ELLENSBURG, WASH. School District No. 401, Ellensburg, Wash. Bids Nov. 23. CD 11/10.

CANADA

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ **Pressure Pipe Co. of Canada Ltd.**, 6905 Clanranald Ave., Montreal, Que., CA, $1,428,089, concrete pressure pipe for water sys., MONTREAL, QUE. Municipality, City Hall, Montreal, Que. CD 9/13/44.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Rush & Tompkins Ltd.**, 10023 103 St., Edmonton, Alta., CA, $2,339,500, CITY HALL, south of Canadian National Rys. Station, EDMONTON, ALTA. City, Civic Block, Edmonton, Alta. Bids Nov. 17, awarded Nov. 22. CD 11/24, under LB.

▲ **Edson Development Corp.**, Edson, Alta., Owner Builds, $5,500,000 HOUSING program, incl. 500 houses, EDSON, ALTA. CD 11/26.

Bird Construction Co., Ltd., 2402 2 A St. S.E., Calgary, Alta., CA, $729,950, NURSES RESIDENCE for Galt Hospital, 9 and 10 Aves., and 17 and 19 Sts., LETHBRIDGE, ALTA. Lethbridge Municipal Hospital Bd., c/o John MacKay, City Hall, Lethbridge, Alta. Bids Nov. 20, awarded Nov. 22. CD 11/12.

Gray-Shaw Construction Co., Ltd., 1747 Eglinton Ave. W., Toronto, Ont. Owner Builds, $675,000. 67-suite APARTMENT, Broadway Ave., TORONTO, ONT. Grossman & Lilitzak, 233 Spadina Ave., Toronto, Ont., archts. CD 9/9.

Silverton Construction Co. Ltd., 257 Yonge Blvd. Toronto, Ont., CA Est. $832,000, 102-suite APARTMENT, 206 St. George St., TORONTO, ONT. Owner, c/o L. E. Weinstein, 120 King St. E., Toronto, Ont. Awarded Nov. 23. CD 10/28.

Benjamin Bobidas, 164 Du Moulin St., Drummondville, Que., CA, Total est. $800,000. foundations for PLANT addn., Sylvan Road, DRUMMONDVILLE, QUE. Sylvania Electric (Canada) Ltd., 1 Sylvania Rd., Drummondville, Que. CD 3/9.

▲ **J. P. Morin Ltd.**, 528 Notre Dame St., Cap de la Madeleine, Que., CA, $1,350,000, 100-bed HOSPITAL, Macamic Rd., LA SARRE, QUE. Province of Quebec, Dpt. Health, Quebec City, Que. CD 2/25.

Monkland Constr. Ltd., 5470 Notre Dame de Grace Ave., Montreal, Que. Owner Builds. $900,000, sixty 41x29 ft., concrete, brick DWELLINGS, MONTREAL, QUE.

J. L. E. Price & Co. Ltd., 4664 St. Catherines St. W., Montreal, Que., CA, $800,000, superstructure of TOOLING BLDG. No. 119 at Plant, MONTREAL, QUE. Canadair Ltd., Montee St. Lawrence, Montreal, Que. CD 11/24, under LB.

Proposed Projects

WATER SUPPLY

▲ **Ky., Covington**—City, City Hall, imprv. water distr. sys. $2,782,000, Black & Veatch, 4706 Broadway, Kansas City 2, Mo., consult. engrs.

▲ **Tex., Fort Worth**—City, W. O. Jones, mgr., City Hall, water plant. $5,000,000. Freese & Nichols, 407 Danciger Bldg., consult. engrs. CD 2/4/49.

SEWERS, WASTE DISPOSAL

▲ **Ky., Owensboro**—City, sewage treatment plant, interceptor sewers (primary settling tanks, digesters, filter beds, concrete sewers), $1,700,000, Consoer-Townsend & Assoc., 351 E. Ohio St., Chicago, Ill., engrs.-archts. CD 4/15/46.

STREETS AND ROADS

▲ **ILLINOIS**—Illinois State Toll Highway Comn., Springfield, has received approval for 1st stage, 191 miles of turnpikes on three routes to cost $390,000,000. CD 6/4.

▲ **TEXAS**—Texas Turnpike Auth., c/o Clarence B. Kloppe, 6854 Lakeshore St., Dallas, and Armistead Rust Chn. of Authority, San Angelo.

Dallas and Tarrant Counties—approx. 29¼ mi. Dallas-Fort Worth Toll Road. $52,000,000. J. C. Dingwall, ch. engr. Coverdale & Colpitts, 120 Wall St., New York, N. Y. will make feasibility surveys. Howard, Needles, Tammen & Bergendoff, 55 Liberty St., New York, N. Y., consult. engrs. CD 6/8.

AIRPORTS

▲† **Me., Bangor**—AIRCRAFT PAVEMENTS, etc.—U. S. Eng., 857 Commonwealth Ave., Boston, Mass., aircraft pavements, lighting and utilities, Dow Air Force Base. $3,000,000. Seelye, Stevenson, Value & Knecht, 101 Park Ave., New York, N. Y., consult. engrs.

▲ **Minn., Minneapolis**—AIRPORT IMPRVS.—Minneapolis-St. Paul Metropolitan Airports Comn., R. Aldrich, exec. dir., 2429 University Ave., St. Paul, reconstr. central section of Northeast-Southwest runway at Wold-Chamberlain Field, $650,000; basic site preparation for proposed new terminal bldg. area near southeast corner of field, $1,500,000, Toltz, King & Day, 1509 Pioneer Bldg., St. Paul, consult. engrs. CD 3/24/48.

▲ **Ont., Ottawa**—PASSENGER TERMINAL—Dpt. Transport, Ottawa, 3 story passenger-terminal bldg. at airport. $2,000,000.

(*Advertisement*)

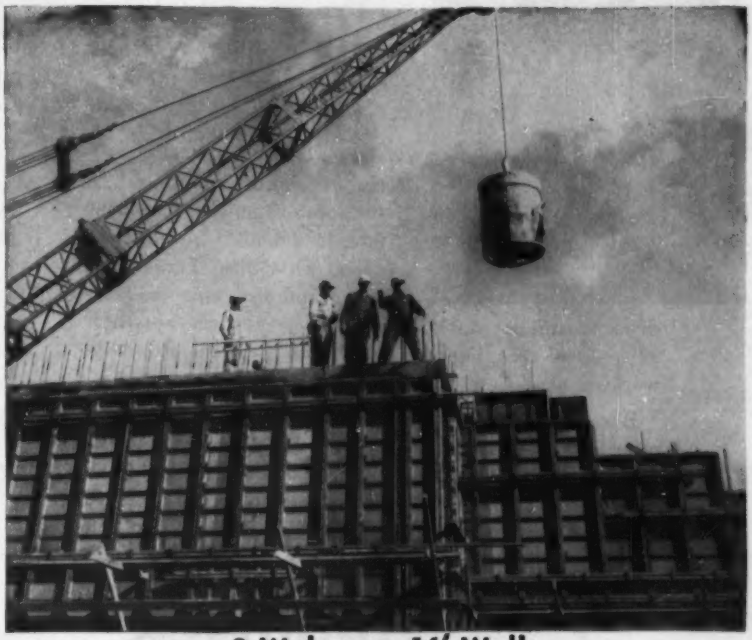

3 Walers on 16' Wall

Henry Carlson Const. Co., Sioux Falls, S. D., used only 3 walers with Symons Forms on 16' high 12" thick wall for City Water Treatment Plant. 10,000 square feet of Symons Panels were reused 12 times on the job, resulting in savings of labor, material and fast forming.

To pour these high walls certain upper panels were raised 1 foot to permit pouring through side openings for the first 8 feet of concrete.

Send the plans for your next job and get complete layout and cost sheets—no obligation. Catalog F-9 available on request. Symons Clamp & Mfg. Co., 4265-L-4 Diversey Ave., Chicago 39, Illinois.

There's **DOWN PRESSURE**

on the New* DAVIS *Loader

with these *Plus Features*

1, Double-Strength Lift Arms. 2, Built-in Strength Throughout. 3, Trouble-Free Hydraulic System. 4, High-Carbon Steel Cutting Edge. 5, Rubber Mounting and Shock Slots.

The new popular Davis Loader has every new feature you asked for. Actually inspect it from stem to stern. See how it is designed to give you greater working power with less strain on your tractor. Notice how the stength is built in with no part extending below or above the main tractor frame. Find out how the exclusive rubber mounting with shock slots "saves your tractor." Of course you get extra digging power and can maintain a grade better with the down pressure. Compare it in price and quality.

AVAILABLE WITH THESE ATTACHMENTS

- **Scarifier**
- **Crane**
- **Utility Bucket**
- **Dozer**
- **Post Driver and Hammer**

SEE YOUR DEALER OR WRITE...

***Fits* ALL POPULAR TRACTORS**

The 101-D and 101-S fit 2-3 plow tractor. The Model 102 with twin dump rams fits 3-4 plow tractors.

Send Coupon for FREE Literature

Send me literature on the Davis Loader to fit a _____ tractor.

Name _____

Address _____

Town _____ **State** _____

MID-WESTERN INDUSTRIES, INC., 1009 S. West St., Dept. N., Wichita, Kansas



Safer ups and downs!

Here's a sure way to keep accident claims down and at the same time, give employee morale a boost. Install Hendrick Shur-Site Treads for stairs and fire escapes. Hendrick treads not only improve safety records but their 90% open area lets more light and air in—improves working conditions.

Bars are square edged and uniformly spaced for extra wear and long life. A heavy flanged nosing-bar provides extra reinforcement and plainly marks the edge of each step for safety's sake. Furnished in standard sizes or in special widths and lengths, they're shipped ready to bolt direct to stair stringers. For more information write Hendrick direct.

Hendrick
MANUFACTURING COMPANY

SEE OUR CATALOG IN SWEET'S

45 DUNDAFF ST., CARBONDALE, PA. • ***Sales Offices In Principal Cities***
Perforated Metal • Perforated Metal Screens • Wedge-Slot Screens • Architectural Grilles • Mitco Open Steel Flooring • Shur-Site Treads • Armorgrids

Dewatering 58 ft. deep bridge pier coffer on Cumberland River near Gallatin, Tenn. J. M. Hickman, Contractor.

4000 gpm...at only 1500 rpm

Jaeger builds longer life into small pumps, too.

When you can move 4,000 gallons of water a minute, with diesel fuel economy *and at recommended diesel engine speed*, that's low cost pumping. Ordinary pumps can't do it but a Jaeger 10PD can—because Jaeger Sure Prime pumps are built bigger, to prime and pump at slower speeds than others. It pays off in long engine and pump life—every time.

1½" to 10"—gas, diesel, electric. Catalog P-10.

THE JAEGER MACHINE COMPANY 500 Dublin Avenue Columbus 16, Ohio

LOADERS • COMPRESSORS • MIXERS • PAVING MACHINES

PUBLIC BUILDINGS

▲ **Calif., Watsonville**—SCHOOL—Watsonville Elementary School Dist. and Watsonville High School District, Watsonville, voted $600,000 bonds for Watsonville Elementary School and $1,050,000 bonds for Watsonville High School District school addns. (Correction—status.) CD 11/8.

▲ **Conn., Greenwich**—SCHOOL—Town, S. Willard Price, supt. Schools, Greenwich, plans by J. Gordon Carr, 80 W. 40 St., New York, N. Y., Western Junior High School, Byram, $2,000,000. CD 8/12.

▲ **Conn., Hartford**—MEDICAL SCHOOL—State, c/o Gov. John Lodge, State Capitol, Hartford, regional medical school. Over $1,000,000.

▲ **Ia., Ames**—LINDEN HALL—State Bd. Educ., State Office Bldg., Des Moines, plans by Dougher, Rich & Woodburn, 302 Garver Bldg., Des Moines, Linden Hall at Iowa State College, $1,600,000.

▲ **Kan., Lawrence**—HOSPITAL—City plans by Cooper, Robison & Carlson, Commerce Trust Bldg., Kansas City, Mo., Lawrence Memorial Hospital addn. $1,000,000. CD 10/26.

▲ **Mass., Cambridge**—COURT—Comrs. Middlesex Co., Court House, superior court bldg. $1,500,000.

▲ **Mich., Big Rapids**—SCIENCE—State, Ferris Institute, Victor Spatheif, pres., Big Rapids, pharmacy and allied science bldg., Ferris Institute. $1,000,000.

▲ **Mich., Detroit**—ARMORY—U. S. Eng., 1900 Cadillac Tower, national guard armory, Eight Mile and Mound Rds., $1,500,000.

▲ **N. Y., Brooklyn**—SCHOOLS—Bd. Educ., Bureau Constr., 45-12 Crescent St., Long Island City.
Proj. E-72, Junior High School 73 addn. $1,900,000.
Proj. E-134, Junior High School 85 addn. $950,000.
Proj. E-286, Junior High School 149 addn. $675,000.
Proj. E-320, P. S. 9. $2,000,000.
Proj. E-350, Junior High School 128 addn. $475,000.
Proj. E-489, Junior High School 64 addn. $500,000.
Proj. E-629, Junior High School 38, $3,000,000. CD 9/8/48.

▲ **N. Y., Brooklyn**—LAUNDRY—Dpt. P. Wks., Municipal Bldg., New York, Zone 7, plans by Syska & Hennessy, 144 E. 39 St., New York, Proj. HO-144. laundry bldg. $4,000,000. CD 1/7/46.

▲ **N. Y., New York**—SCHOOLS—Bd. Educ., Bureau Constr., 45-12 Crescent St., Long Island City, Zone 1,
Proj. E-86, Junior High School 44 addn. $700,000.
Proj. E-120, P. S. 78 addn. $400,000.
Proj. E-183, P. S. 116 addn. $400,000.
Proj. E-194, Yorkville Vocational High School addn. $1,400,000.
Proj. E-213, P. S. 135, $1,600,000.
Proj. E-238, P. S. 15, $580,000.
Proj. E-239, P. S. 17, $1,000,000.
Proj. E-341, P. S. 57 addn. $1,000,000.
Proj. E-403, Junior High School 115 addn. $475,000.
Proj. E-598, P. S. 34 addn. $700,000.
Proj. E-649, Machine & Metal Trades High School addn. $500,000. CD 9/8/48.

▲ **Okla., Tulsa**—AUDITORIUM—City, City Hall, defeated $5,500,000 bonds Nov. 16, for civic auditorium. CD 8/17.

▲ **Pa., Doylestown**—HIGH SCHOOL—Central Bucks Joint School Bd., Doylestown, Junior High School. $1,000,000.

▲ **Tex., Austin**—AUDITORIUM—City, City Hall, plans by Jessen, Jessen, Millhouse & Greeven, 2816 Hemphill Park, and Page, Southerland & Page, 602 West Ave., municipal auditorium, $1,750,000. CD 2/10.

▲ **Tex., El Paso**—HIGH SCHOOL—El Paso Independent School Dist., El Paso, plans by Davis & Foster, Mills Bldg., 1 and 2 story masonry Cielo Vista High School addn. $1,500,000. CD 11/10.

▲ **Tex., Houston**—SCHOOLS—Houston Independent School District, 1300 Capitol St., plans by Donald Barthelme & Assocs., 3106 Brazos St., West Bellaire Junior High School, $950,000; plans by Cowell & Neuhaus, 2303 LaBranch St., Victoria-Arlington Elementary School $1,000,000, Milton McGinty, 2425 Ralph St., coord. archt.; plans by Colley & Tamminga, 3416-A Louisiana St., Oak Forest Junior High School, $875,000; plans by Emory S. White, 666 M&S Bldg., Junior High School in Sunnyside-Grimes Area, $750,000; plans by Wyatt C. Hedrick, 5201 Fannin St., Senior High School in Garden Villas-Foster Place area, $1,200,000; plans by Ralph M. Buffington, 301 Avondale St., Finnegan Park Elementary School $650,000, Milton McGinty, 2425 Ralph St., coord. archt.; plans by Hiram Salisbury & T. G. McHale, 3501 Buffalo Dr., Houston, SW Bellaire Elementary School $750,000, Milton McGinty, 2425 Ralph St., coord. archt.; plans by Wyle W. Vale, 517 W. Gray St., Clark and Cooper Road Elementary School $500,000, Milton McGinty, 2425 Ralph St., coord. archt. CD 6/23/47.

▲ **Wis., Beaver Dam**—HIGH SCHOOL—Bd. of Educ., Beaver Dam, plans by R. N. Levee & Assocs., 121 N. Story St., Appleton, high school. $1,000,000.

▲ **Man., Falcon Lake**—RESORT TOWN—Dept. Mines & Resources, Winnipeg, resort town, trailer camp, motel, shopping center, restaurants, etc. $1,000,000.

COMMERCIAL BUILDINGS

▲ **Del., Newark**—COUNTRY CLUB HOUSE—E. I. du Pont de Nemours & Co., Inc., du Pont Bldg., Wilmington, country club house, $1,000,000. H. M. Gordon, c/o owner, engr.

▲ **Ind., North Manchester**—RESIDENCE HALL, etc.—Bd. Trustees Manchester College, Dr. V. F. Schwalm,

(Continued on page 96)

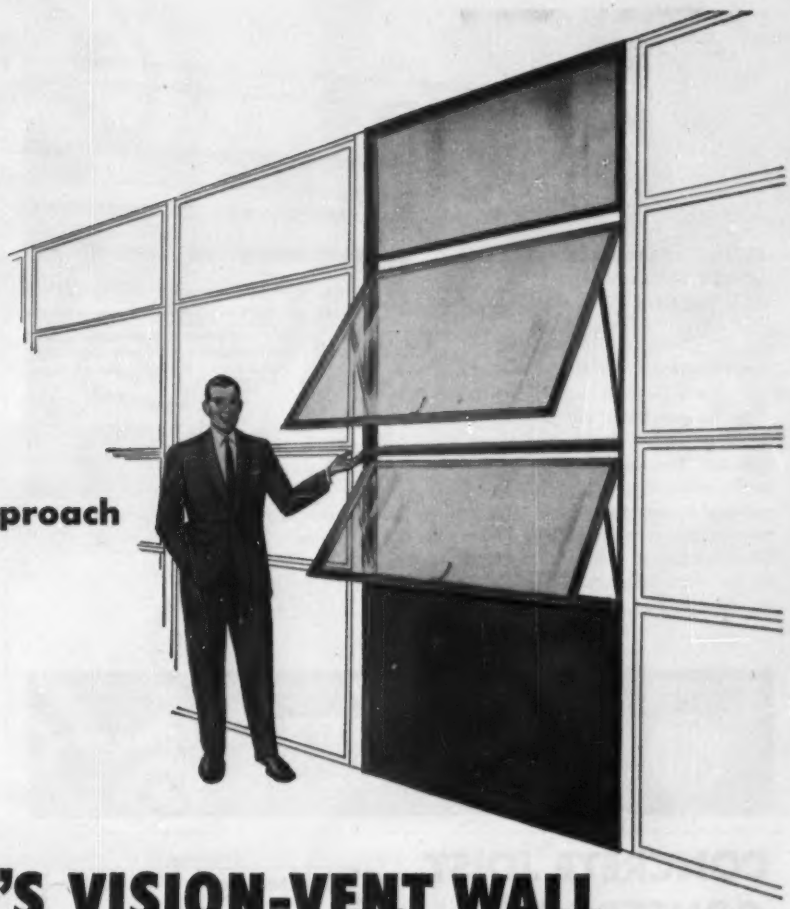

An exciting new approach to fast, economical construction...

TRUSCON'S VISION-VENT WALL



Illustrated is a recent Vision-Vent application at Clemson Barracks, Clemson College, S. C. Lyles, Bissett, Carlisle & Wolff, architects; Daniel Construction Co., contractors. Vision-Vent also is being used for a chain of hospitals.

Vision-Vent is a new building unit with all the mass-production and installation economies of standard steel windows. It is designed to enclose entire walls.

Each Vision-Vent unit is complete. Section includes fixed lights, awning-type ventilators, and insulated steel panels. Elements may be varied to meet functional and appearance requirements.

Insulated panels—in colored porcelain enamel or in stainless steel—have a "U" factor of .197, equivalent to that of an ordinary masonry spandrel wall. Vision-Vent panels retain interior heat. They provide for efficient air-conditioning. Minimum wall thickness—less than 1½"—provides extra square feet of floor space. Light weight is reflected in structural savings.

Erection is done from inside at an average rate of a floor a day. Vision-Vent is weathertight.

This exciting new Truscon development is recommended for use in the design of all types of single and multi-story buildings. Truscon window engineers will be glad to study your requirements, and develop design details and costs. More details in Sweet's, or write:

TRUSCON®

TRUSCON STEEL DIVISION
REPUBLIC STEEL
1064 ALBERT STREET • YOUNGSTOWN 1, OHIO
Export Department: Chrysler Building, New York 17, N.Y.

'a name you can **build** on

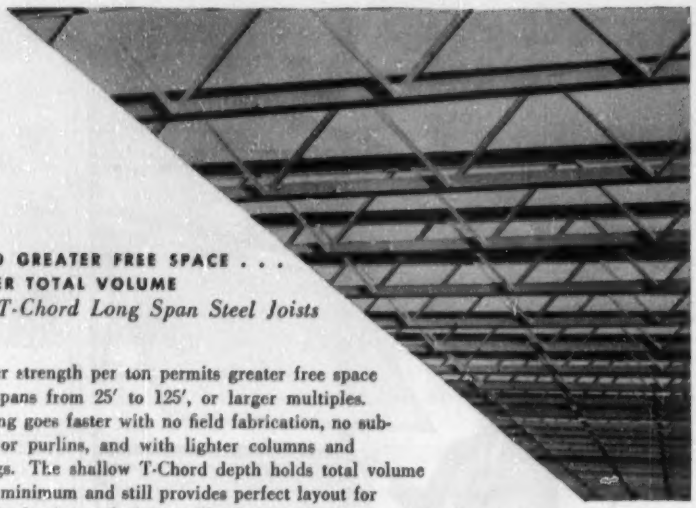

BUILD GREATER FREE SPACE . . .
LOWER TOTAL VOLUME
with *T-Chord Long Span Steel Joists*

Greater strength per ton permits greater free space with spans from 25′ to 125′, or larger multiples. Framing goes faster with no field fabrication, no sub-joists or purlins, and with lighter columns and footings. The shallow T-Chord depth holds total volume to the minimum and still provides perfect layout for conduit, ducting and piping. This low total volume cuts heating, ventilating and maintenance expenses. Let our engineers show you how to profit with T-Chord planning. Write, wire, or phone us for more information.

See Sweet's Architectural File, Sweet's Industrial File No. $\frac{2c}{Ha}$

STRUCTURAL STEEL • MISCELLANEOUS IRON • T-CHORD LONG SPAN JOISTS • ORNAMENTAL IRON

HAVEN - BUSCH COMPANY

501 Front Ave., N. W., • Phone 9-4173 • Grand Rapids 4, Michigan

CONCRETE JOIST CONSTRUCTION

RENTAL and ERECTION SERVICE

Member of CONCRETE REINFORCING STEEL INSTITUTE CRSI founded 1924

Gateway PANS

Stocked in . . .

- CHICAGO
- NEW YORK
- BALTIMORE
- CINCINNATI
- KANSAS CITY

NAILED-DOWN & SLIP-IN PANS

Ask for Catalog No. 3100

GATEWAY ERECTORS, INC.

3233 W. Grand Ave. Chicago 51, Illinois

Greater Value Per Dollar with WARREN-KNIGHT TRANSITS & LEVELS

Because Warren-Knight instruments are sold direct from factory to you —Many additional advantages are passed along free of extra cost. These extra advantages are especially designed to save you time or to save you cost. For instance, the new Warren-Knight 7eF has over 29 specific features—yet is supplied at a surprisingly low price.

Send for FREE Catalog NR418

WARREN-KNIGHT

136 NORTH 12TH STREET PHILADELPHIA 7, PA.

GUNITE Since 1915 **CONCRETE** SAND AND CEMENT "Placed by Air"

We have the equipment, personnel and experience to complete any and all GUNITE work regardless of size or location.

Send for specifications and bulletins
No obligation

See our catalog in Sweets

GUNITE CONCRETE & CONST. CO.

1301 WOODSWETHER RD., KANSAS CITY 5, MO.
2016 W. WALNUT, CHICAGO 12, ILL.
2036 ADDISON, HOUSTON 25, TEXAS
St. Louis—Minneapolis—Denver—New Orleans

(Continued from page 94)

pres., North Manchester, women's residence hall, science bldg., rehabilitation existing bldgs. on campus. $1,500,000.

▲ **Mich., Flint**—MOTEL—Jack J. Sarvis Champion Auto Supply Co., Flint, 2 story, 55,000 sq. ft. motel, 108 units, parking lot 40,000 sq. ft., Dort Hy. and Lippincott St. $1,100,000.

▲ **Mich., Kalamazoo**—DORMITORY—Bronson Hospital, Dr. William O. Perdew, supt., Kalamazoo, plans by Stapert-Pratt-Bulthuis & Sprau, 474 Academy St., steel, concrete nurses' dormitory, $1,000,000. CD 9/9.

▲ **Mich., Kalamazoo**—DEPARTMENT STORE—Sears Roebuck & Co., Kalamazoo, department store, 7 acre tract, $1,250,000.

▲ **Minn., Minneapolis**—HOTEL—Park-Plaza, Inc., F. A. Ossana, Jr., pres., County Road 60, Hopkins, plans by Thorshov & Cerny, 400 Metropolitan Bldg., remodel Plaza Hotel, incl. remodeling existing bldg., 5 story addn., 10 story bldg. on south end of block, Hennepin Ave. and Kenwood Parkway, $6,000,000.

▲ **Tex., Houston**—HOMES—A. & E. Developers, Inc., 3929 Villanova St., 22 brick homes, concrete slab $316,800; 31 frame, brick dwellings, $363,185; 27 brick, stone trim dwellings, concrete slab, $347,000 area Schaeper Road intersection, near here.

▲ **N. Y., Briarcliff and Ossining**—APARTMENT—United Nations International Community Coop., Ernest Weissman, chn., c/o Keyes, Smith, Satterlee & Lethbridge, archts., 3 duPont Circle, N.W., Wash., D. C., garden apartment proj. and 100 one family houses on 120 acre tract to be called High Meadow. $7,000,000. Ralph Eberlin, 123 E. 77 St., New York, Zone 21, consult. engr.

▲ **O., Cincinnati**—HOUSING—Gwilym E. Jones, Vernon Manor Bldg., housing development of 57 acre tract bounded by U. S. 52 and Four Mile Rd., $2,500,000.

▲ **Pa., Broomall** — SHOPPING CENTER — Owner, c/o W. J. McCarter, Liberty Title & Trust Co., Broad and Arch Sts., Phila., plans by George W. Neff, 1520 Locust St., Phila., shopping center, Springfield and Lawrence Rds. $10,000,000.

▲ **Tex., Dallas**—DISPLAY—Walter W. Ahlschlager, 2505 Turtle Creek Dr., 7 story bsmnt., 165,000 sq. ft. wholesale furniture display bldg., 1st two floors for auto parking. Fairmount and Turtle Creek. $1,750,000.

▲ **Tex., Fort Worth**—RESIDENCES, etc.—E. E. Gloer, 200 Burnett St., approx. 3,000 brick veneer residences, shopping center. $1,000,000.

▲ **Tex., Houston**—HIGH SCHOOL—The St. Pius X High School, 6501 Almeda Rd., masonry co-educational high school, N. Shepherd Dr. $1,100,000.

▲ **Tex., Houston**—APARTMENT—Kleiman A. Schuddekoph, c/o Town & Country Apartments, Inc., 2904 S. MacGregor St., plans by Kane & Fairchild, 734 Asylum Ave., Hartford, Conn., apartment. $1,000,000. CD 11/22.

▲ **Tex., San Antonio**—SHOPPING CENTERS—Barshop & Clapp Co., 1500 S. Zarzamora St., Sec. 1, shopping center, $1,100,000; Sec. 2, regional shopping center, $750,000; Sec. 3, regional shopping center, $875,000, on 75-acre tract area San Pedro Ave. and Loop 13.

▲ **Wis., Greendale**—RESIDENCES—Wisconsin Realty Co., 785 North Jefferson St., Milwaukee, plans by R. E. Rasche, 783 N. Jefferson St., Milwaukee, 325 residences. $1,000,000.

▲ **Man., Winnipeg**—MERCHANDISE MART—Manitoba Merchandising Mart, c/o John W. Harris Associates Inc., 30 Rockefeller Plaza, New York, N. Y., U.S.A. plans by Northwood, Chivers, & Casey, Nanton Bldg., 10 story, bsmnt., merchandising mart Ellice and Notre Dame Aves. $4,000,000.

INDUSTRIAL BUILDINGS

▲ **Ala., Huntsville**—INDUSTRIAL—The Norton Co., 1 New Bond St., Worcester, Mass., industrial bldg., 99-acre site on Tennessee River near Hobbs Island. $1,250,000.

▲ **Conn., Fairfield**—FOUNDRY—J. W. Bullard Mfg. Co., 1342 Kings Hy. Cutoff, Fairfield, plans by Alexander D. Crossett & Assocs., 27 William St., New York, N. Y. casting foundry adjoining present factory and west of Black Rock Turnpike. $6,000,000. CD 7/1.

▲ **Kan., Bonner Springs**—PLANT—Lone Star Cement Corp., Federal Reserve Bank Bldg., Kansas City, Mo., plant expansion, new kiln, auxiliary equip., raw ball mill, coal mill, clinker grinding mill, raw material feed bins, tanks, power distr. equip. $3,500,000.

▲ **La., Sterlington**—PLANT—Commercial Solvents Corp., Sterlington, separation and purification section of nitroparaffin plant, $2,750,000, Tears Engineers, 4617 Colt Ave., Dallas, Tex., consult. engrs.

▲ **N. S., New Glasgow**—FOUNDRY—I. Matheson & Co. Ltd., North Provost, New Glasgow, reconstr. foundry $2,000,000.

▲ **Que., Montreal**—Plant Cott Beverage of Canada Ltd., 4660 St. Lawrence Blvd., soft-drink and syrups mfg. plant. $1,000,000.

UNCLASSIFIED

▲ **Louisiana**—AERIAL TRAMWAY—The California Co., Calif. Co. Bldg., New Orleans, aerial tramway to transport personnel to and from production plant, Leeville, $1,500,000; stringing some field crude lines in Bay Marchand area, Leeville, $90,000.

▲ **N. Y., Westbury**—RACING TRACT—Roosevelt Raceway, Westbury, rehabilitation harness racing tract to include triple deck stands, new track, parking, etc. 42-acre tract. $8,000,000.

FACE LIFTING Contractor's Hill IN PANAMA

Huge rocks are blasted from benches for hauling to the spoil area in 22-ton "Eucs" that are working 20 hours a day to meet the 15 month contract deadline.

Gaillard Cut is the narrowest section of the Canal—Contractor's Hill, at left in this photo, threatens to slide into the channel. It is being benched to shift center of gravity away from the Canal.

Tecon Corp. picked "Eucs" for this big rock job

When Tecon Corp. was awarded the contract for this 2 million yard face-lifting project, they knew they had an urgent and mighty important job ahead of them. If new fissures in Contractor's Hill caused a slide into the narrow channel at Gaillard Cut, the Panama Canal could be closed to shipping for many months.

To meet the 15 month contract deadline, 8500 yds. of solid rock must be moved every day to a spoil area a mile away. Because of their experience with Euclid equipment on other tough jobs, Tecon chose Rear-Dump "Eucs" of 22 ton capacity. A fleet of nine machines with 300 h.p. engines and Torqmatic Drives were rushed to the site and are working 20 hours a day.

On big jobs like this one, as well as on more routine construction and mining operations, the dependable performance of "Eucs" gets more work done at lower cost per ton or yard. Your nearby Euclid dealer will be glad to provide facts and figures on the complete line of Euclid earth moving equipment.

EUCLID DIVISION GENERAL MOTORS CORPORATION, Cleveland 17, Ohio

Cable Address: YUKLID Code: BENTLEY

Euclid Equipment

FOR MOVING EARTH, ROCK, COAL AND ORE

GM GENERAL MOTORS

Bids—Low Bids—Contracts—Second Section

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
STREETS AND ROADS
December 14 Massachusetts

▲† N. H., Portsmouth—HANGARS—BA On Or Abou 1/7—U. S. Eng., 857 Commonwealth Ave., Boston 15 Mass., nine multi-purpose hangars, Portsmouth Air Force Base, ENG-19-016-55-62. $3,000,000-$3,500,000. Plans deposit $25. CD 12/6/51.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ MASSACHUSETTS—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston,
Charles Capone Contg. Co., Inc., 850A Providence Hy., Dedham, Mass. LB $1,641,198, est. $2,300,000. U-299 (8) hy. and bridge constr. Southern Circumferential Hy. Rte. 128, Dedham and Westwood. Bids Nov. 30. CD 11/3.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ John W. Rouse Constr. Corp., 8 Church St., Gouverneur, N. Y., LB $1,299,627. Junior HIGH SCHOOL, SPRINGFIELD, VT. Town School Bldg. Comn., Supt. Schools, Park St., Springfield, Vt. Bids Nov. 26. CD 11/19.

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
December 14 New Jersey December 21 Pennsylvania
STREETS AND ROADS
December 21 Pennsylvania December 23 New York

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ NEW JERSEY—New Jersey Turnpike Auth., Administration Bldg., New Brunswick,
American Bridge Div., U. S. Steel Corp., 525 Wm. Penn Pl., Pittsburgh, Pa., CA, $1,513,375 steel superstructures of 5 bridges in Jersey City, Contract N-16, Hudson Co. Bids Nov. 23. CD 11/4.

▲ PENNSYLVANIA—Pennsylvania Turnpike Comn., 11 N. 4 St., Harrisburg,
Lycoming Constr. Co., Inc., 127 Susquehanna St., Williamsport 19, Pa., LB $3,068,363. constr. 6.62 mi. (Sec. 37-E) Northeastern exten. in Bear Creek and Dennison Twps., Luzerne Co. Bids Dec. 1. CD 11/11.

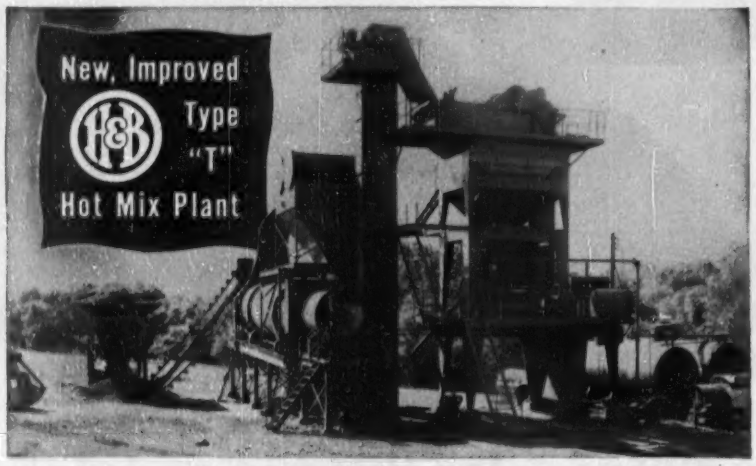

Increased Production—Lower Maintenance Costs

New Structural Design—All-welded bent plate construction.

Flat Screen—Adequate screening area on all sizes.

Self-Contained Dust Bin—Empties directly into weigh box, eliminating screw conveyor.

Trunnion Roll Drive—on dryer, eliminating vibration and reducing maintenance costs.

The new H & B Type "T" incorporates, in the basic plant, all of the major improvements of the past 20 years. New structural design and many exclusive features combine to make a plant that has already established outstanding records in both production and maintenance.

In addition to the features listed at the left, air controls and self-contained overflows are standard equipment on all Type "T" plants. No loose pieces to move or erect. 4 sizes—from 25 tons to 160 tons per hour—to meet your requirements. Available with electric, Diesel electric, Diesel or gasoline power. Factory wired plants available when electric power is used.

For specifications and complete information, write for Bulletin T-54.

HETHERINGTON & BERNER INC.
Engineers • Manufacturers
730 KENTUCKY AVENUE • INDIANAPOLIS 7, INDIANA

▲ Harry C. Erb, Inc., 29 Bala Ave., Bala, Pa., LB $1,739,450. Frankford Creek Flood Control Proj., dredging, bridges, roadway, PHILA., PA. Dpt. Procurement, City Hall Annex, Phila., Pa. Samuel S. Baxter, Water Comr. Bids Nov. 23. CD 10/21.

▲† Cramer-Vollmerhausen Co., Inc., 1919 Kenilworth Ave., Bladensburg, Md., LB, $3,919,759 Dalecarlia Pumping Station, 5900 MacArthur Blvd., CIVENG-49-080-55-3, WASH., D. C. U. S. Eng., First and Douglas Sts. N.W., Wash. 25, D. C. Bids Nov. 30.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ Briarwood No. 3 Corp., c/o Seelig & Finkelstein, archts., 153 Pierrepont St., Brooklyn 2, N. Y. Owner Builds. $2,107,500, 6 story APARTMENT for 281-families, Main St. and 84 Ave., BRIARWOOD, N. Y. CD 3/17.

▲ Briarwood No. 1 Corp., c/o Seelig & Finkelstein, archts., 153 Pierrepont St., Brooklyn 2, N. Y. Owner Builds. $1,800,000, 6 story APARTMENT for 240-families, 139 St. and 83 Ave., BRIARWOOD, N. Y. CD 3/17.

▲ Albarry Constr. Corp., 119 W. 57 St., New York 19, N. Y., LB $1,930,000, general constr. Junior HIGH SCHOOL 185, 25 Dr., 149 St., 26 Ave. and 147 St., FLUSHING, N. Y. Bd. Educ., Bureau Constr., 42-15 Crescent St., Long Island City 1, N. Y. Bids Nov. 30. CD 11/4.

▲ Psaty & Fuhrman, Inc., 369 Lexington Ave., New York 17, N. Y., LB $1,159,000, general constr., Public School 209 Utopia Parkway and 16 Ave., E-803, WHITESTONE, N. Y. Bd. Educ., Bureau Constr., 42-15 Crescent St., Long Island City 1, N. Y. Bids Nov. 26. CD 11/4.

▲ Pine Estates c/o M. Bozain, 704 Browning Rd., Pennsauken, N. J., Separate Contracts, $2,000,000. RESIDENTIAL DEVELOPMENT, Washington Ave., WEST BERLIN, N. J. Dante D'Anastasio, 1015 Federal St., Camden, N. J., archt.

▲ C. DiFelice, Inc., 24 N. Merion Ave., Bryn Mawr, Pa. Separate Contracts. $6,000,000. RESIDENTIAL DEVELOPMENT, Tredyffrin Twp., BERWYN, PA.

▲ John A. Robbins, Inc., 10 S. 18 St., Phila., Pa., CA $3,500,000. INDUSTRIAL DEVELOPMENT, Roosevelt Blvd. above Haidemann St., 16-acre tract, PHILA., PA. Owner, c/o Agent Levy-Lynch & Co., 2311 Penna. Ave., Phila., Pa. George W. Neff, 1520 Locust St., Phila., Pa., archt.

▲ Madway Engineers & Constructors, 107 Aberdeen Ave., Wayne, Pa., CA $10,000,000. four APARTMENTS, STORES and parking unit, Benjamin Franklin Parkway, 22nd to 24 Sts., PHILA., PA. Harry K. Madway, 107 Aberdeen Ave., Wayne, Pa. and Bernard Weinberg, 2409 N. Broad St., Phila., Pa. John Hans Graham & Assocs., 2430 Penna Ave. N.W., Wash., D. C., archts. CD 7/27.

▲ Schneider & Davis, 2040 Manontongo St., Pottsville, Pa., LB $1,250,000. HIGH SCHOOL, POTTSVILLE, PA. Roman Catholic Archdiocese of Phila., 310 N. 19 St., Phila., Pa. Bids Nov. 2. CD 11/5.

▲ Roslyn Homes, 3209 Brunswick Ave., Drexel Hill, Pa., Separate Contracts. $1,000,000. RESIDENTIAL DEVELOPMENT. Edgar Ave., etc., VILLAGE GREEN, PA.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
December 14 West Virginia December 15 Virginia
December 17 Kentucky
STREETS AND ROADS
December 15 Virginia December 17 Kentucky
December 22 Louisiana

BIDS ASKED—BUILDINGS

▲ La., New Orleans—CIVIC CENTER—BA 1/11—City, Bureau Purchasing, 302 City Hall, Proposal No. 2788, civic center, city hall on site bounded by Poydras, Perdido, Loyola and LaSalle Sts. $8,800,000. Plans deposit $150. Goldstein, Parham & Labouisse, 811 American Bank Bldg., archts. CD 10/19.

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† Southern Roadbuilders, Inc., P.O. Box 1129, Augusta, Ga., CA, $1,817,091, airfield paving, Pinecastle Air Force Base, ORLANDO, FLA. U. S. Eng., P.O. Box 4970, Jacksonville, Fla. Bids Nov. 10. CD 9/30.

MIDDLE WEST

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
December 15 Michigan
STREETS AND ROADS
December 15 Michigan

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲ OHIO—State Hy. Dpt., Columbus, Zone 15, D. R. Smalley & Sons, Inc., 436 W. Market St., Celina, O. LB $1,351,675, est. $1,444,600, Part 1, T-71, T-35; Part 3, T-71 and structures 3.32 mi. USR 40-(10.83-11.82) USR 40DA-0.00; USR 40-(13.43-14.10), USR 40DA-(1.59-1.68), U-556 (9), U-UG-556 (6), City of Springfield, Clark Co.;

(Continued on page 100)

PITT CHEM puts the Crimp on Sea Wall Corrosion

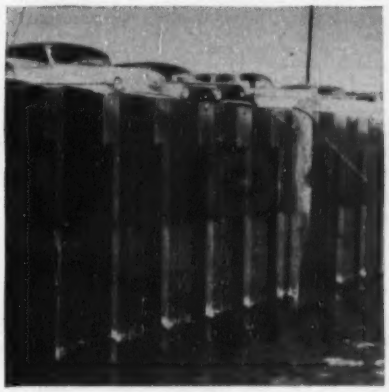

Keeping steel from being eaten alive by sea water is one of the corrosion engineer's toughest headaches. The busy Long Beach Port Harbor is solving the problem by the application of Pitt Chem Tar Base Coatings to its steel sea wall piling.

Sprayed with a 3/16" film of tar base coating, the exposed area of the 70-foot-long steel "Z" sections resist both the electrolytic action of the salt water and corrosion of the salt air. Pitt Chem Coatings also provide watertight piling joints.

No matter how tough or complex your corrosion problem may be, there's a good chance a Pitt Chem engineer can find a solution with one of the durable, economical, easy-to-apply Pitt Chem Coatings. We'll be glad to have him survey your needs—without cost or obligation.

WSO 5169

PITT CHEM 101—For Severest Conditions
PITT CHEM 102—Maintenance Coating
PITT CHEM 103—General Purpose Coating
PITT CHEM 104—Potable Water Service
PITT CHEM 105 AQUATAR—A Water Dispersion
PITT CHEM 106 TARMASTIC—Sealing Mastic
PITT CHEM 107 PACHKOTE—Specialty Coating
PITT CHEM 110—Coating Sealer

PROTECTIVE COATINGS DIVISION
PITTSBURGH
COKE & CHEMICAL CO.
Grant Building • Pittsburgh 19, Pa.

COAL CHEMICALS • AGRICULTURAL CHEMICALS • FINE CHEMICALS • PROTECTIVE COATINGS • PLASTICIZERS • ACTIVATED CARBON • COKE • CEMENT • PIG IRON

GET UP TO

200 RE-USES

With

PLYGLAZE®

CONCRETE FORM PANELS

PLYGLAZE gives you the strength and toughness of Exterior plywood—plus the *extra* stamina, *extra* durability of flint-hard, glass-smooth fused resin fiber surfaces. These tough, virtually indestructible surfaces coupled with plywood's rugged strength, mean maximum re-use—80, 150 or even up to 200. As a matter of fact, *over* 200 re-uses have been recorded. Specify Plyglaze on your next job. Treat it with care, plan and build forms for long service and you, too, can get uses up in the hundreds.

Plyglaze comes in 4' x 8' panels; ½", ⅝", and ¾" thick. For complete data, write St. Paul & Tacoma Lumber Co., Tacoma 2, Wash.

ANOTHER MEMBER OF THE FAMOUS TREE LIFE FAMILY OF FOREST PRODUCTS

ST. PAUL & TACOMA LUMBER CO. TREE LIFE FOREST PRODUCTS ESTABLISHED 1906

(Continued from page 98)

John G. Witten, Sardis, O., LB **$228,667**, est. $271,000, Type T-35 on B-119 and structure 1.358 mi. SR 76-12.42, S-181 (4), Washington Co.;

Menuez & Skemp, Millersburg, O., LB **$86,623**, est. $100,100, Type T-35 and structure 0.174 mi. SR 94-(25.80-25.85), S-828 (4), Village of Rittman, Wayne Co.;

George A. Stein Contg. Co., Chillicothe, O., LB **$101,553**, est. $114,200, Type T-35 on B-119 and structure 0.373 mi. SR 247-19.79, Adams Co.;

Walter L. Follmer, P. O. Box 173, Hamilton, O., LB **$86,586**, est. $89,000, Type T-35 on B-119 and structure 0.485 mi. SR 132-25.22, Clermont Co.;

Glen Rhoades Constr. Co., Mt. Orab, O., LB **$72,370**, est. $98,900, Type T-35, 0.273 mi. SR 222-(11.25) (18.01), Clermont Co.;

W. E. Engle, McArthur, O., LB **$73,432**, est. $83,000, Type T-35 on B-119 and structure 0.676 mi. SR 380-0.30, Clinton Co.;

The Hollinger-Davidson Co., 640 Miami St., Akron, O. LB **$167,966**, est. $185,200, Type T-71, 0.881 mi. USR 36-18.15, Coshocton Co.;

Sutton & Stewart, Inc., Main St., Bridgeport, O., LB **$75,450**, est. $77,300, Type T-35 on B-119 and structure 0.482 mi. SR 247-5.89, Highland Co.;

The Ohio Eng. Co., 105 Sixth St., Lorain, O., LB **$739,365**, est. $798,500, Type T-35 and structures, 3.487 mi. USR 20-(11.72-15.15), City of Elyria, Lorain Co.;

Wren Reese, R. R. No. 2, Napoleon, O., LB **$386,734**, est. $456,300, Type T-35 on B-119 and structures, 1.699 mi. USR 30N-(7.27-8.87) (9.03), Wyandot Co.; cancelled bids to have been opened Nov. 23, Type T-71, 0.255 mi. USR 422-(3.22-3.37), City of Youngstown, Mahoning Co. Bids Nov. 23. CD 10/28.

▲ **INDIANA**—Indiana Toll Road Comn., 309 W. Washington St., Old Trails Bldg., Indianapolis,

Louis Garavaglia, 24240 Mound Rd., Centerline, Mich., and **Pierson Contg. Co.**, 200 Eddy Blvd., Saginaw, Mich., CA **$3,865,953**. Contracts 31 and 32, Indiana East-West Toll Road, St. Joseph Co. Bids Nov. 10, awarded Nov. 23. CD 11/12.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **James McHugh Constr. Co.**, 6449 S. South Park St., Chicago, Ill., CA **$5,000,000** general contract St. Michael's HOSPITAL, MILWAUKEE, WIS. Franciscan Sisters, 1845 N. 4 St., Milwaukee, Wis. Bids Nov. 10. CD 10/27.

WEST OF MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

December 17 Kansas, Minnesota

STREETS AND ROADS

December 16, 17 Kansas December 17 Minnesota

HEAVY CONSTRUCTION

LOW BIDS AND CONTRACTS

▲† **H. B. Zachry Co.**, West Harding Blvd., San Antonio, Tex., LB, **$2,111,920**, est. $2,171,113, aircraft parking apron and maintenance aprons, Abilene Air Force Base, Inv. ENG-41-443-55-31, ABILENE, TEX. U. S. Eng., 100 W. Vickery Blvd., Fort Worth, Tex. Bids Nov. 30. CD 10/29.

▲† **C. F. Lytle & Green Constr. Co.**, Box 206, Sioux City, Ia., CA, **$6,270,790**. Glendow Dam, Power Plant foundation and roads, Oregon Trail Div., Glendow unit Missouri River Basin Proj., Spec. DC 4255, WYOMING. Bureau Reclamation, Dpt. Interior, Casper, Wyo. Bids Nov. 9, awarded Nov. 27. CD 11/11, under LB.

FAR WEST

BIDS ASKED—HEAVY CONSTRUCTION

STATE HIGHWAY LETTINGS

BRIDGES

December 16 Washington

STREETS AND ROADS

December 16 Washington

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **D. & E. Corp.**, 8956 W. Olympic Blvd., Beverly Hills, Calif., CA **$1,657,500**, 195 frame, stucco DWELLINGS, Lyndora and Adorn Sts., BELLFLOWER, CALIF. Royalty Estates, 8956 W. Olympic Blvd., Beverly Hills, Calif.

CANADA

BIDS ASKED—HEAVY CONSTRUCTION

▲ **Ontario**—BA 1/19—St. Lawrence Seaway Authority, 1225 No. 2 Temporary Bldg., Ottawa, canal and lock around Iroquois Dam at upstream end of the rapids. CD 9/9.

BUILDINGS

LOW BIDS AND CONTRACTS

▲ **Beaurivage Gardens Ltd.**, 6541 Park Ave., Montreal, Que., Owner Builds. **$3,000,000**, 300 DWELLINGS in housing project on new streets, BOUCHERVILLE, QUE.

▲ **S. D. Miller & Sons**, 6999 Cote des Neiges Rd., Montreal, Que., Owner Builds. **$2,500,000**, 200-unit HOUSING DEVELOPMENT, Beavelark and Lyall Sts., MONTREAL, QUE. Eliasoph & Berkowitz, 6931 Cote des Neiges Rd., Montreal, Que., archts.

(Proposal Advertisements see pp. 115 to 118)

DECEMBER CONSTRUCTION SCOREBOARD









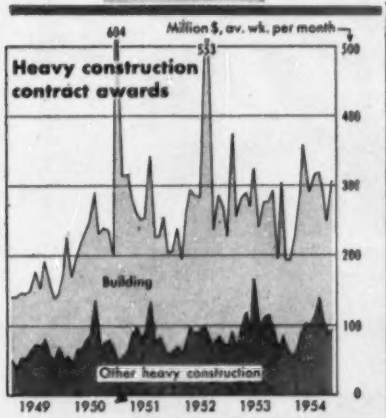

ENR INDEXES (1913=100), 20-cities' average	1954 Dec.	% Change from last Month	% Change from last Year
Construction Cost	643.31	0.0	+ 5.2
Building Cost	456.77	+0.1	+4.9
WAGE RATES, 20-cities' average			
Common	$2.022	0.0	+4.6
Skilled (aver. 3 trades)	3.186	+0.1	+3.4
Bricklayers	3.457	0.0	+2.8
Structural Ironworkers	3.164	+0.1	+4.0
Carpenters	2.936	0.0	+3.4
MATERIAL PRICES, 20-cities' average			
Cement, bulk, per bbl	3.464	0.0	+3.7
Structural Steel (3-mill aver.), per cwt	4.250	0.0	+3.7
Sand, per ton	2.251	0.0	+3.2
Lumber, 2x4 Fir, per M. ft. bm	113.222	−0.4	+14.1
Lumber, 2x4 Pine, per M. ft. bm	94.333	+1.2	+3.3
Common brick, per M	33.237	0.0	+1.0
Ready-mixed concrete, per c. y	12.237	+0.1	+2.2
Structural Clay Tile, 3x12x12 per M	162.585	0.0	+1.8

CONTRACTS AWARDED (Millions)	November	1954 11 Mos. (47 weeks)	% Change from '53 November	% Change from '53 11 Mos.* (48 weeks)
Total U. S. (ENR reported)	$1,214.6	$13,038.5	+52.9	−2.5
Private	674.2	7,366.2	+66.4	−2.8
Public	540.4	5,672.3	+38.8	−2.2
Federal	132.3	1,171.7	+76.8	−10.8
ENR Volume Index, '13=100	522	482	+47.5	−4.2
NEW CAPITAL (Millions)				
Total	640.3	10,506.4	+4.5	+0.5
State & Municipal Bond Sales	576.9	5,118.1	+30.5	+18.8
Corporate Security Sales	55.2	2,499.3	−66.6	−34.5
Federal (non-federal work)	8.2	783.0	+26.2	−9.0
Federal (federal work)	0.0	2,106.5	0.0	+34.8

*Computed on weekly average

MATERIAL SHIPMENTS & LABOR SUPPLIES (millions)	1954 Sept. (S) Oct. (O)	9 Mos. (9) 10 Mos. (10)	% Change from '53 Mo.	% Change from '53 Yr-Cum.
Cement, bbls, Bu. of Mines	29.058(S)	207.716(9)	+5.9	+4.0
Fabr. Struc. Steel, tons AISC	.255(O)	2.679(10)	−13.9	+3.3
Lumber, mil. ft. bm., NLMA	3.202(S)	27.526(9)	−0.9	−7.2
Lumber Prod., mil. ft. bm., NLMA	3.240(S)	27.505(9)	−7.1	−7.6
Contract Const. Employ., BLS	2.674(O)	2.624(10)†	−4.3	−0.3

†Average

ENR CONSTRUCTION & BUILDING COST INDEXES IN 21 CITIES (1913=100)

	Construction Cost Dec. '54	Construction Cost Sept. '54	Building Cost Dec. '54	Building Cost Sept. '54		Construction Cost Dec. '54	Construction Cost Sept. '54	Building Cost Dec. '54	Building Cost Sept. '54
Atlanta	474	474	400	400	Los Angeles	667	665	452	448
Baltimore	578	573	455	448	Minneapolis	697	697	492	491
Birmingham	507	488	420	409	Montreal	557	526	422	391
Boston	671	669	453	448	New Orleans	523	528	432	435
Chicago	734	734	468	467	New York	745	742	528	526
Cincinnati	642	641	445	444	Philadelphia	691	691	516	516
Cleveland	751	738	464	458	Pittsburgh	666	666	475	475
Dallas	484	487	402	405	St. Louis	687	684	477	473
Denver	632	633	467	468	San Francisco	649	631	443	423
Detroit	729	729	466	467	Seattle	676	682	414	419

For indexes Sept. '48 to Sept. '54 see October 7, 1954 ENR, pages 95, 97

JENKINS PRACTICAL PIPING LAYOUTS 68

How to plan a

HIGH PRESSURE — HIGH TEMPERATURE HOT WATER PIPING SYSTEM

For many applications, a high pressure—high temperature system, like the one illustrated here, offers several distinct advantages over a steam system. It provides for efficient space heating and water heating, and also for numerous processing needs, such as dye vats, plating tanks and evaporators.

Often operated at pressures up to 215 psi, with a corresponding temperature of 388°F, a HP-HT system of this type employs a simpler piping design that eliminates the need for pitch, drainage, or traps. It provides a far greater amount of heat transmission for a given pipe size and, since makeup is extremely low, requires no feed-water treatment. Also, when this system is used for processing services, there are no large pressure drops due to sudden load conditions.

The hot water is generated in a shell and tube heat exchanger by means of high pressure steam from either turbine extraction or turbine exhaust. A closed expansion tank maintains constant pressure within the system. Water is circulated by regular closed expansion tank maintains constant pressure boiler feed type centrifugal pumps to all uses. A high pressure makeup pump delivers the small amount of makeup required. As shown in the diagram a recording and integrating Btu meter indicates thermal energy consumed by equipment.

Unit heaters on the HP-HT lines provide for space heating requirements. A shell and tube heat exchanger supplies warm water for lavatories, kitchens, and processing which requires moderate temperatures.

When accumulators are used another important advantage of this system is the storage of steam in excess of the HP-HT demand. This feature is particularly desirable when the load on the turbine from which the steam is extracted or exhausted is not in coincidence with the system's demand. Under these circumstances, steam may be drawn from the accumulators to meet the increased HP-HT requirements. Thus, the need for taking additional steam directly from the steam generating source is decreased or eliminated, with a better plant heat balance as a direct result.

Jenkins Fig. 1010-CM Cast Steel Gate Valves are recommended for the thermostatic steam admission valve shutoffs in this system. For 300 lb. service, at temperatures to 850°F, they are made of carbon molybdenum alloy steel, with stainless steel wedges (up to 8" size) and H-monel seat rings. The rising spindle serves to indicate the position of the wedge. Operating threads are on the outside, allowing easy cleaning and lubrication.

Consultation with accredited piping engineers and contractors is recommended when planning any major piping installation.

To save time, to simplify planning, to get all the advantages of Jenkins specialized valve engineering experience, select all the valves you need from the complete Jenkins line. It's your best assurance of *lowest cost in the long run.* Jenkins Bros., 100 Park Ave., New York 17. Sold through Leading Industrial Distributors everywhere.

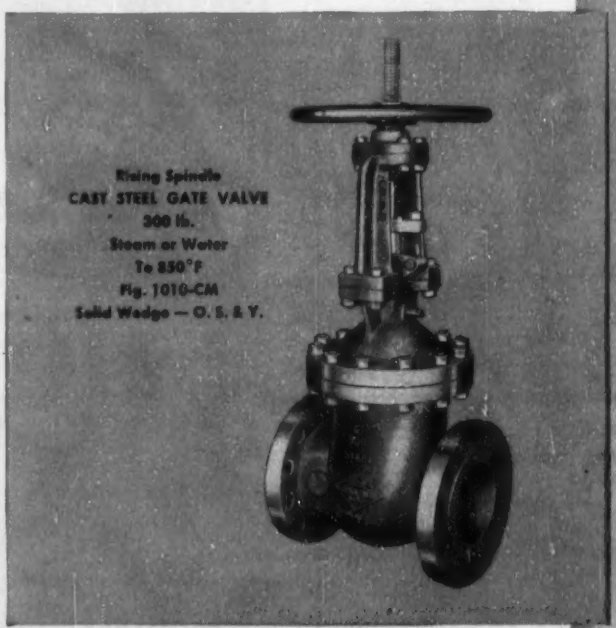

The *extra* measure of efficiency and endurance built into *all* Jenkins Valves is a distinguishing feature of Jenkins Cast Steel Valves. Compare the quality, and see why it pays to specify *Jenkins.* A new catalog of Cast Steel Valves gives detailed pressure ratings, dimensions, and other technical data covering all patterns. Send for your copy.

Jenkins Bros., 100 Park Avenue
New York 17, N. Y.
Please send folder Cast Steel Valves

Name.....

Company.....

Address.....

JENKINS VALVES

SINCE 1864 TRADE JENKINS MARK

Jenkins Bros

HIGH PRESSURE — HIGH TEMPERATURE HOT WATER PIPING SYSTEM

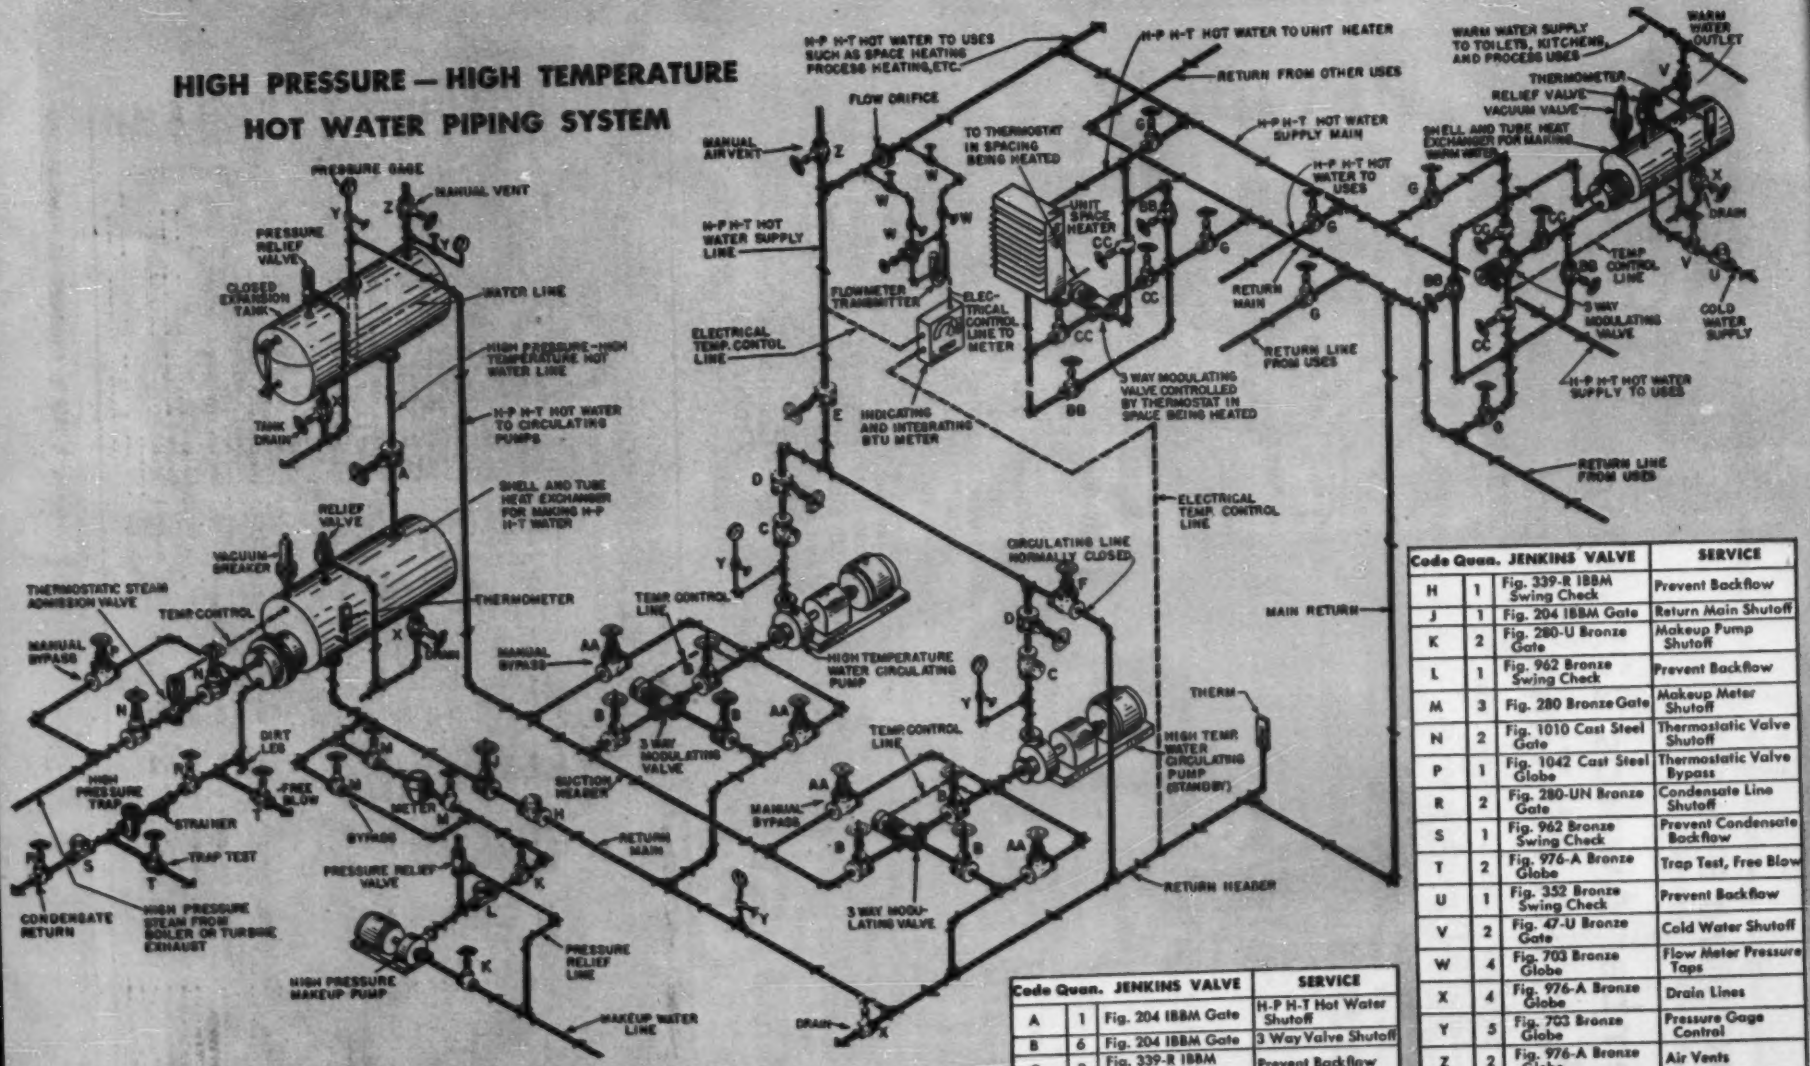

Code	Quan.	JENKINS VALVE	SERVICE
A	1	Fig. 204 IBBM Gate	H-P H-T Hot Water Shutoff
B	6	Fig. 204 IBBM Gate	3 Way Valve Shutoff
C	2	Fig. 339-R IBBM Swing Check	Prevent Backflow
D	2	Fig. 204 IBBM Gate	Pump Discharge Shutoff
E	1	Fig. 204 IBBM Gate	Supply Line Shutoff
F	1	Fig. 923 IBBM Globe	Circulating Line Shutoff
G	6	Fig. 280 Bronze Gate	Branch Shutoffs

Code	Quan.	JENKINS VALVE	SERVICE
H	1	Fig. 339-R IBBM Swing Check	Prevent Backflow
J	1	Fig. 204 IBBM Gate	Return Main Shutoff
K	2	Fig. 280-U Bronze Gate	Makeup Pump Shutoff
L	1	Fig. 962 Bronze Swing Check	Prevent Backflow
M	3	Fig. 280 Bronze Gate	Makeup Meter Shutoff
N	2	Fig. 1010 Cast Steel Gate	Thermostatic Valve Shutoff
P	1	Fig. 1042 Cast Steel Globe	Thermostatic Valve Bypass
R	2	Fig. 280-UN Bronze Gate	Condensate Line Shutoff
S	1	Fig. 962 Bronze Swing Check	Prevent Condensate Backflow
T	2	Fig. 976-A Bronze Globe	Trap Test, Free Blow
U	1	Fig. 352 Bronze Swing Check	Prevent Backflow
V	2	Fig. 47-U Bronze Gate	Cold Water Shutoff
W	4	Fig. 703 Bronze Globe	Flow Meter Pressure Taps
X	4	Fig. 976-A Bronze Globe	Drain Lines
Y	5	Fig. 703 Bronze Globe	Pressure Gage Control
Z	2	Fig. 976-A Bronze Globe	Air Vents
AA	4	Fig. 923 IBBM Globe	3 Way Valve Bypass
BB	4	Fig. 976-A Bronze Globe	3 Way Valve Bypass
CC	6	Fig. 280 Bronze Gate	3 Way Valve Shutoff

Diagram by Hurley Madeheim, Consulting Engineer

COPYRIGHT, 1953 — JENKINS BROS.

For details of valves to suit varying conditions, see Jenkins Catalog.

November Awards 22% Over October, Set All-Time Record

Nearly all major types of construction share in the rise. Total volume for 11 months is now only 3% behind last year

Construction awards reported to ENR in November set a new high for the month by a wide margin of 12% over the previous record set in 1952. The total was $1,215 million, 22% ahead of October, and a whopping 53% ahead of November 1953.

This surge in November contract volume pushes total awards for the year so far to 3% behind the same 1953 period. The gap was 6% at the end of October. For the first 11 months, contracts top $13 billion. Of this, private construction accounts for nearly $7.4 billion, 3% behind the record private volume in the same 1953 period. State and municipal awards total $4.5 billion, just 0.3% ahead of the previous high in 1953. The high volume of federal awards in November cut the decline in this category from 16% at the end of October to only 11% at the end of November.

Nearly all major types of public and private work shared in the rise from October. State and municipal awards climbed 5% to $408 million, a new record for the month and 30% ahead of November 1953. Federal work racked up $132 million in awards. That's an 11% gain from October, and 77% more than a year ago.

• **Public works**—Combining both state and municipal awards and federal contracts, nearly all types rose last month. The only exceptions: waterworks, and earthwork & drainage. Waterworks was the only major category that failed to pass the level of a year ago. Total public awards were over $540 million.

• **Private awards**—Private construction also set a new record for November, with a total of $674 million. This just topped the previous November high in 1952, and was almost 29% ahead of October 1953. Compared with a year ago, private awards were up 66%. However, the year-end figure was very low—$405 million.

Industrial and commercial building and mass housing all contributed to the high November volume with gains over October. Commercial and housing awards were also far ahead of the year-ago totals.

Housing contracts jumped to $377 million last month, more than twice the November 1953 volume and a new high for the month. Commercial awards topped $149 million, also more than double the year-ago mark. Industrial building awards were also higher in November—10% above October. However, they were 13% below last year.

• **Regions**—New England contracts continued at a fast clip last month. The 11-month total is already ahead of the record annual high set last year. And it is 18% ahead of the same 11-month period last year.

November awards were also heavy in the Middle Atlantic states, contracts there totaled $349 million, 46% more than October 1954, and more than double the year-ago volume.

Business also is continuing to improve rapidly in the West-of-Mississippi region. The total there for the year so far is now 8% ahead of 1953, which was the record year for this region.

The Far West has reduced the 1953-1954 gap to 6%, compared with a 10% decline at the end of October. And in the Mid-West, volume is only 13% behind last year. It was 15% at the end of October.

The South continues to show the greatest decline in heavy construction so far this year. Awards are down 25% at the end of the first 11 months. However, that is a slight improvement from the 26% decline at the end of October.

(*B&F continued on page 108*)

ENGINEERING CONSTRUCTION CONTRACTS—NOVEMBER 1954

ENGINEERING NEWS-RECORD *reports continental U. S. Construction projects of the following minimum costs—Waterworks, excavation, drainage and irrigation,* $34,000; *other public works,* $60,000; *industrial buildings,* $82,000; *other buildings,* $300,000

Four Weeks—Thousands of Dollars (000 Omitted)

	November, 1954						U. S. Cumulative Eleven Months		% Change	Canada
	New England	Middle Atlantic	South	Mid-West	West of Mississippi	Far West	Total U. S.	1954 (47 weeks)	1953 (48 weeks)	'53 to '54 Av. Wk.	November 1954
Public Works											
Waterworks	1,015	2,000	2,375	3,512	8,119	2,557	**19,578**	**219,619**	214,186	+ 5	3,475
Sewerage	2,175	18,734	1,275	3,356	4,872	9,733	**40,145**	**357,783**	400,642	− 9	1,462
Bridges	1,908	8,031	20,808	3,662	3,198	1,932	**39,539**	**449,340**	623,809	−26	2,662
Earthwork and drainage	136	1,724	3,450	11	7,650	2,678	**15,649**	**287,971**	335,324	−12	752
Streets and roads	6,611	51,527	22,502	34,527	18,733	15,276	**149,176**	**1,729,477**	1,646,366	+ 7	3,742
Public buildings, residential	803	1,959	10,901	.....	23,531	5,357	**42,551**	**240,838**	363,683	−32	9,035
Other public buildings	14,392	42,398	17,330	22,790	26,044	20,497	**143,451**	**1,592,736**	1,577,103	+ 3	20,993
Unclassified	1,309	8,923	25,302	20,008	21,002	13,801	**90,345**	**794,575**	702,883	+ 6	9,596
Total public	**28,349**	**135,296**	**103,943**	**87,866**	**113,149**	**71,831**	**540,434**	**5,672,339**	**5,923,996**	**− 2**	**51,717**
Federal government (included in above classifications)	2,949	19,447	27,991	20,182	38,157	23,617	**132,343**	**1,171,651**	1,341,189	−11	27,732
Private											
Bridges	2,738	.....	.....	600	100	.....	**3,438**	**10,338**	8,865	+19	.....
Industrial buildings	8,002	7,106	30,807	63,547	13,803	5,645	**128,910**	**1,701,595**	2,608,845	−33	42,564
Mass housing	4,120	150,227	3,581	51,514	129,791	37,960	**377,193**	**3,868,953**	3,224,973	+23	46,270
Commercial buildings	3,732	55,791	4,392	19,558	42,334	23,483	**149,290**	**1,272,149**	1,066,484	+22	11,429
Unclassified	.....	988	798	2,292	11,146	93	**15,317**	**513,123**	826,809	−37	7,282
Total private	**18,592**	**214,112**	**39,578**	**137,511**	**197,174**	**67,181**	**674,148**	**7,366,208**	**7,735,976**	**− 3**	**107,545**
Total Engineering Construction:											
November, 1954—4 weeks	**46,941**	**349,408**	**143,521**	**225,377**	**310,323**	**139,012**	**1,214,582**	.....	.....	....	**159,262**
October, 1954—4 weeks	40,892	239,422	152,991	153,311	276,929	132,236	**995,781**	.....	.....	.....	95,531
November, 1953—4 weeks	44,756	171,780	146,034	168,848	177,023	85,874	**794,315**	.....	.....	....	101,729
Eleven Months—1954	**662,457**	**3,380,209**	**1,776,649**	**2,612,546**	**3,059,489**	**1,546,097**	.....	**13,038,547**	.....	**− 3**	**1,492,488**
Eleven Months—1953	573,463	3,049,021	2,405,641	3,053,364	2,894,360	1,684,123	.....	.....	13,659,972	.....	1,189,867
% Change '53 to '54 (Av. Wk.)	+18	+13	−25	−13	+8	−6	.....	.....	.....	....	+28

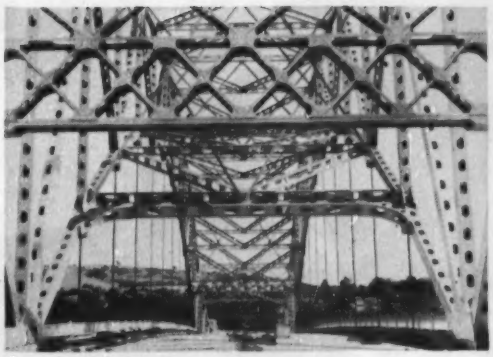

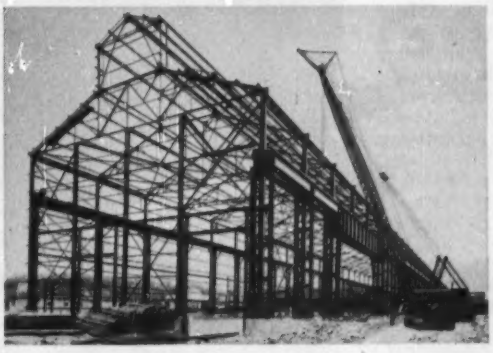

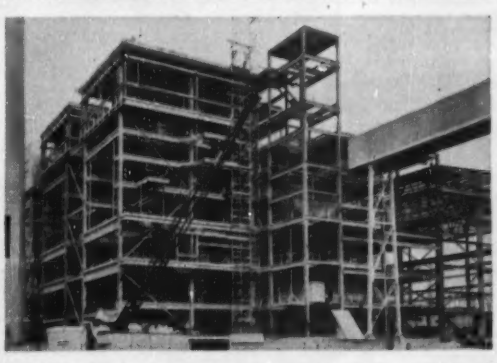

"STEEL PERMITS STREAMLINING CONSTRUCTION WITH SAFETY, ENDURANCE AND ECONOMY"

"There is no substitute for structural steel"

AISC MEMBER OF STEEL CONSTRUCTION FOUNDED 1921

SPEED DELIVERY...

REDUCE COSTS...

BUILD BETTER...

with

Fabricated Structural Steel

by

FORT PITT BRIDGE

When you want strength, endurance, versatility, economy and speed in *your* construction, specify and use Structural Steel fabricated by Fort Pitt Bridge—specialists in the engineering, fabrication and erection of all types of steel construction since 1896.

Fort Pitt **BRIDGE WORKS**

Member American Institute of Steel Construction

General Offices, PITTSBURGH, PA. • *Plant at* CANONSBURG, PA.

District Offices:

NEW YORK, N. Y. • CLEVELAND, OHIO • DETROIT, MICHIGAN

Now—a big step forward

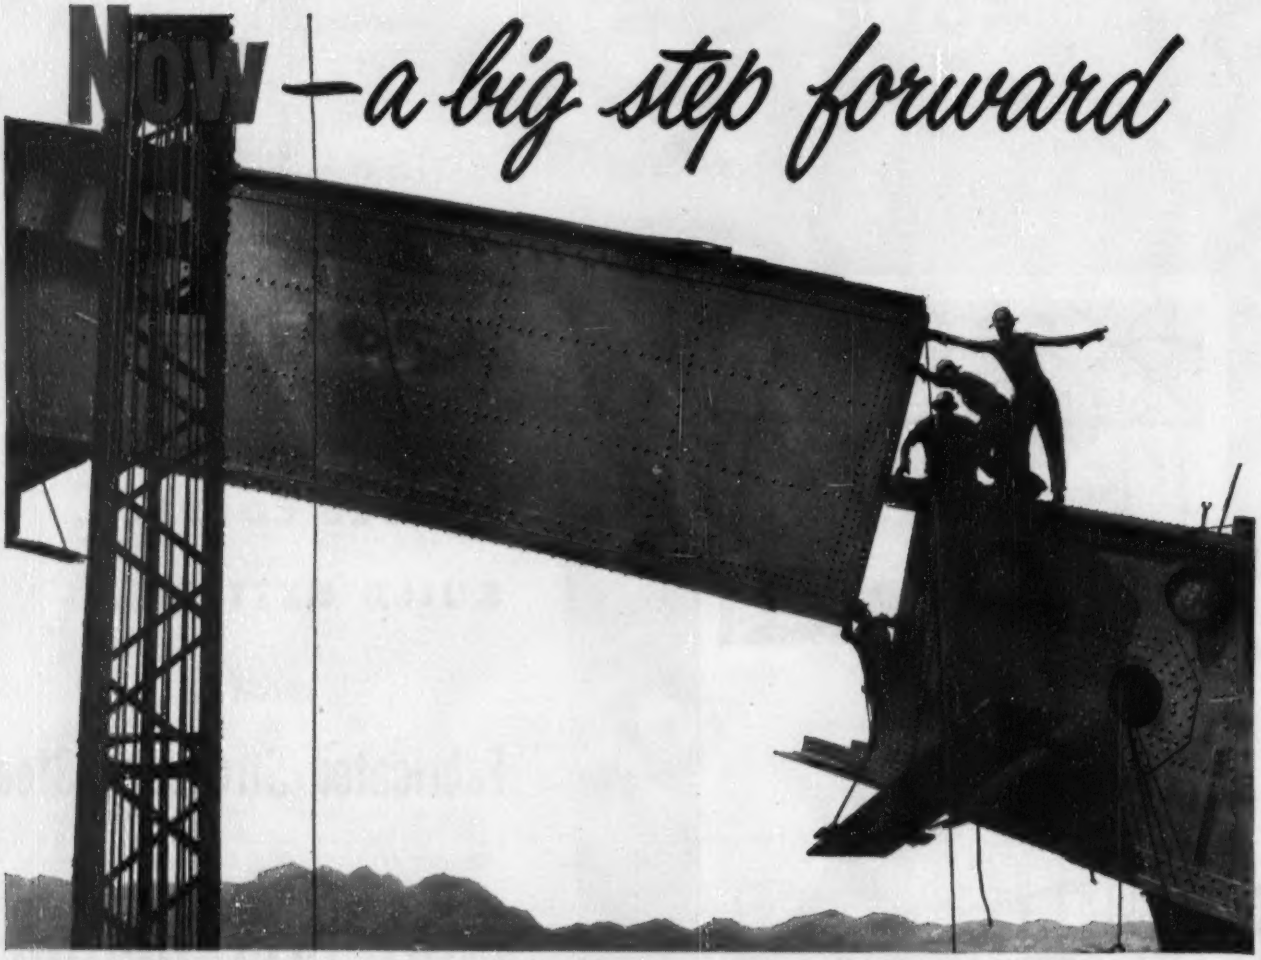

2,500 tons of USS MAN-TEN Steel—45% of the total structural steel involved—are used in this bridge spanning the Ohio River at Wheeling, W. Va. Used in the main stress-carrying members of the 580 ft. tied-arch span and for the main members of the 160 ft. to 200 ft. continuous girder spans in the approaches, USS MAN-TEN Steel gave the bridge engineers the advantages of higher yield point, greater durability and twice the atmospheric corrosion resistance of ordinary construction. It also provided the fabricator with a more easily fabricated steel at a savings in cost of material.

in bridge construction...

USS High Strength Steels

...that pay off in greater strength, easier fabrication, high corrosion resistance and lower costs

SOMETHING new and important has been happening to bridge structures. Improved design, improved fabrication techniques, improved erection methods, and lower costs—all made possible by increasing use of *stronger, more durable steels.*

For in high strength steels, like USS MAN-TEN, USS TRI-TEN "E" and USS COR-TEN, bridge engineers have found superior materials of construction with which they can build safer, more dependable structures for long term, continuous operation, often at lower costs than hitherto.

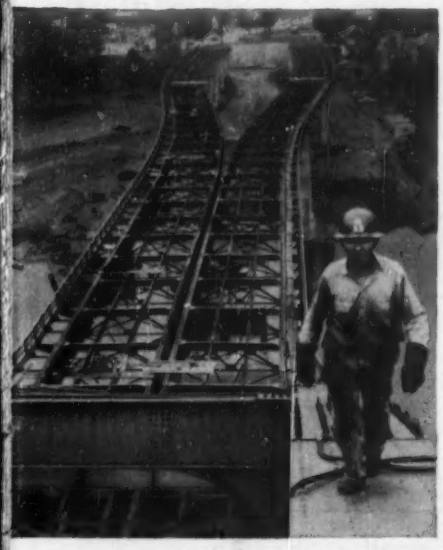

A number of bridges, both large and small, have already been constructed with these high strength steels. In many of the most important bridges now being erected or projected for the future, these superior steels are being used or are specified. And for good reason.

All these famous "steels that do more" have higher yield points than structural silicon steel in thicknesses up to and including 1½". All have at least twice the atmospheric corrosion resistance. All, regardless of thickness, have greater ductility.

As a result, their use in structural members makes it possible for the designer to obtain greater strength with no increase in weight, or to reduce weight without any sacrifice in strength. And always, to ensure greater durability.

Maximum results can be obtained from these steels by taking advantage of their specific characteristics. For example, USS MAN-TEN Steel is intended primarily for use in structural members of riveted and bolted bridges requiring high strength with atmospheric corrosion resistance equal to that of copper steel.

While USS TRI-TEN "E" Steel can also be used for riveted bridges, it is particularly applicable where *weldability* is a primary consideration, and where structural members must withstand moderately severe impacts in low temperature service. This steel combines high strength and unusual toughness with atmospheric corrosion resistance equal to that of copper steel.

USS COR-TEN Steel — which has two to three times the atmospheric corrosion resistance of copper steel—can be relied upon to materially prolong life wherever corrosive conditions are severe. For instance, it can be used for blast plates on bridges passing over railroads and for ballast plates on railroad bridges.

SOON TO BE ISSUED . . . Our new *"Design Manual for High Strength Steels"* contains comprehensive and practical information that you will find extremely useful in designing your products for greater economy and efficiency by the sound use of high strength steels. Watch our future advertisements for the announcement of the availability of this important publication.

New 9th Street Bridge at Wheeling, West Virginia

Now nearing completion, the new Ohio River crossing illustrated here is a typical example of the growing use of USS High Strength Steels in present-day bridge construction.

Owner: State of West Virginia
Consulting Engineers: Howard, Needles, Tammen & Bergendoff
Kansas City, Missouri

USS MAN-TEN Steel spans fabricated and erected by American Bridge Division of United States Steel.

UNITED STATES STEEL CORPORATION, PITTSBURGH • AMERICAN STEEL & WIRE DIVISION, CLEVELAND • COLUMBIA-GENEVA STEEL DIVISION, SAN FRANCISCO
NATIONAL TUBE DIVISION, PITTSBURGH • TENNESSEE COAL & IRON DIVISION, FAIRFIELD, ALA. • UNITED STATES STEEL SUPPLY DIVISION, WAREHOUSE DISTRIBUTORS
UNITED STATES STEEL EXPORT COMPANY, NEW YORK

USS HIGH STRENGTH STEELS

USS MAN-TEN • USS COR-TEN • USS TRI-TEN

USS

UNITED STATES STEEL

Building Cost and Price Roundup

Indexes, 1913 = 100

Weighted cost indexes	Orig. base	1954 Mar.	June	Sept.	Oct.	Nov.	Dec.
ENR Construction Cost....	1913 = 100	614	622	641	642	643	**643**
ENR Building Cost	1913 = 100	437	440	454	456	456	**457**
Assoc. Gen. Contractors...	1913 = 100	420	424	431	432	**432**	...
American Appraisal*.....	1913 = 100	586	589	**595**	...	...	...
Weighted price indexes**							
Boeckh, comm'l. & mfg....	1926-29 = 100	446	449	**454**	...	...	...
Smith, Hinchman & Grylls..	1926 = 100	496	498	501	501	**505**	...
Contractor price indexes							
Aberthaw***.....	1914 = 100	393	393	**395**	...	...	...
Austin	1926 = 100	350	352	**353**	...	...	...
Fuller	1913 = 100	448#	452†	...	**455**	...	...
Turner	1939 = 100	487#	487†	...	**487**	...	...

*Adjusted for estimated productivity.
**Includes overhead, profit; adjusted for estimated productivity.
***Indexes shown are based on 1914 = 100. #April. †July.

Costs Rise Faster This Year, Spurred on by Lumber Strike

This summer's long strike at Pacific Northwest lumber mills has pushed up ENR's cost indexes faster this year than in 1953 (charts).

While prices of other key materials used in ENR's Construction Cost Index and Building Cost Index climbed at a relatively slow pace, fir prices rocketed 14.1% because of strike-created shortages and heavy demand. Pine prices reflected the fir shortage, rising 3.5% during the year. So the combined 20-cities average of fir and pine prices, which is used in both ENR indexes, rose 9.5%. This lumber component has been more volatile than the others.

• **Wage boosts**—As expected, wage increases this year were lower than in 1953. However, many were bigger than the 7.5 cents to 10 cents per hr range which had been expected. One reason for this: the pickup in construction last spring while new contract talks were in progress.

Bricklayers, for instance, averaged higher raises this year than in 1953 in the 20 U. S. cities. But they won these boosts in only 13 cities, compared with 18 in 1953. Increases averaged 14.3 cents per hr, compared with 11.3 cents in 1953. Carpenters signed new contracts for higher wages in 16 cities, they averaged hikes of 12.1 cents per hr, compared with 16.0 cents in 1953.

Structural ironworkers had the most widespread increases of the three key trades included in ENR's skilled labor component. They got raises in 19 cities, averaging 13.2 cents per hr. Last year, the average was 18.8 cents in 19 cities.

Common labor unions in 19 cities averaged 9.4 cents per hr in boosts, compared with 11.8 cents last year.

• **New records**—The result of all this is that ENR's Construction Cost Index has reached a new high of 643.31 this December, up 5.2% this year compared with a 4.0% increase last year. The Building Cost Index also is at a new high, up 4.9% to 456.77. Its rise last year was 2.6%. Both indexes are based on 1913=100.

• **Other indexes**—The table shows what has been happening to the other indexes. The weighted index of materials and labor costs kept by Associated General Contractors has moved up about 3.3% since the start of this year. American Appraisal Co.'s weighted index covering four types of buildings also has moved up about 1.7% since the start of the year.

There are also a number of price indexes which measure what contractors charge for their finished work, as distinguished from their costs. The latest available figures show a range of increases this year that is lower than the range of increases in costs. This indicates the squeeze on contractor profit margins still continued this fall.

Of two weighted price indexes, the Boeckh Index for five types of commercial and factory buildings is up about 0.6% since the start of the year. The Smith, Hinchman & Grylls Index is up about 1.9%.

The five contractor price indexes show trends in actual prices charged for finished work. Latest available indexes show a fairly wide variance, ranging from a 2.2% decline for the Fuller Index since the start of the year, to a 2.2% gain for Turner. The Aberthaw indicator shows a 0.8% gain, and Austain is up 1%.

Annual cost trends in materials prices...

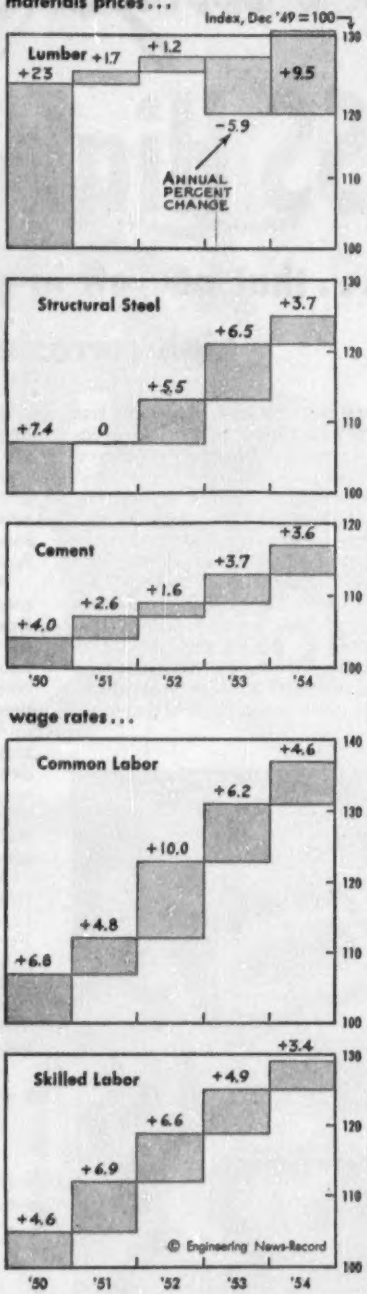

"Wolfson, Inc."

MC&S plans to acquire 3 other Wolfson interests

Louis E. Wolfson, the fabulous financier who controls Merritt-Chapman & Scott Corp., moved last week to put most of his interests under one corporate hat.

MC&S will propose a stock merger to stockholders of New York Shipbuilding Corp., Devoe & Raynolds Co., Inc., and Tennessee Products & Chemical Corp. Wolfson also controls the first two companies and has a minority interest in Tennessee Products. Directors of all three firms have approved the proposal, by which stockholders would exchange their stock for MC&S common stock.

The merger would create a many-sided firm with gross assets of more than $200 million and net worth of about $129 million. Gross 1953 revenues of these four companies were over $400 million.

• **Integration**—The four have more in common than might at first appear. MC&S has subsidiaries making steel and construction equipment, also electronic assemblies and TV cabinets. New York Ship makes heavy industrial equipment, and through its recently acquired Nesco Division produces electrical appliances, housewares, and steel containers. Through an affiliate, it makes earth-boring machines. Devoe & Raynolds makes paints and related products. Tennessee makes building materials, metallurgical and chemical products, and fuels.

When asked for a statement, Wolfson said: "The wide yet interrelated range of products and services . . . can most productively be developed by this contemplated action. Integration of skills, manpower, equipment and other resources offers each company an increased opportunity."

Along with this offer, MC&S will seek to clean up its present corporate setup by trying to acquire the few remaining outstanding shares of three recently acquired subsidiaries: Newport Steel Co., Marion Power Shovel Co., and Marion's subsidiary, Osgood Co. To get the necessary stock for all this, MC&S is filing a registration statement for 2,960,000 shares with the Securities & Exchange Commission.

The only other major Wolfson interest in a publicly owned company that is not included in the merger is Capital Transit Co., Washington, D. C.

Activity This Week

As reported to ENR
(in millions of dollars)

Amount of contracts let

	This Week	Cumulative 49 wks 1954	1953	% chge
Federal	$18.4	$1,212.2	$1,353.1	−10
State and municipal	83.6	4,668.8	4,688.4	−0.4
Total public	102.0	5,881.0	6,041.5	−3
Total private	156.3	7,718.6	7,912.8	−2
U. S. total	$258.3	$13,599.6	$13,954.3	−3

Contracts by type of work

Waterworks	$3.5	$226.3	$232.5	−3
Sewerage	4.5	367.5	406.7	−10
Bridges	7.8	476.6	644.4	−26
Highways	34.9	1,795.7	1,670.5	+7
Earthwork, waterways	8.4	299.8	341.0	−12
Buildings:				
Public, excl. hsg.	24.6	1,650.4	1,615.5	+2
Housg., public	0.9	244.3	369.0	−34
Housg., private	103.7	4,049.1	3,291.3	+23
Commercial	31.0	1,356.5	1,107.6	+22
Industrial	18.9	1,782.3	2,660.4	−33
Unclassified	20.1	1,351.1	1,615.4	−16
Total	$258.3	$13,599.6	$13,954.3	−3

NOTE: Minimum size projects included are: Waterworks and waterways, $34,000; other public works, $60,000; industrial buildings, $82,000; other buildings, $300,000.

New capital for construction

(millions of dollars)	Week of Dec. 2 1954	Cumulative 48 Wks 1954	'53-'54 % chge
Corporate securities	$18.4	$2,517.7	−35
State and municipal:			
All except housing	42.1	5,069.2	+25
Housing	...	91.0	−65
Federal loans	0.4	110.0	+2
Federal aid	...	673.0	−13
Total non-federal	$61.0	$8,460.9	−7
Federal appropriations:			
In U. S.	...	$2,073.3	+32
Outside U. S.	...	33.2	+15
Total new capital	$61.0	$10,567.4	−1

ENR cost and volume indexes, 1954

		Base years = 100 1913	1926	1949
Construction cost	12/2/54†	643.31	309.24	134.86
	10/28/54†	643.02	309.10	134.80
Building cost	12/2/54†	456.77	246.92	129.84
	10/28/54†	456.34	246.68	129.72
Volume	Nov.	522	212	151
	Oct.	423	172	122

† Official monthly indexes for Dec. and Nov. 1

TIMBER-TREATING CYLINDERS

• Whatever your need in pressure vessels—creosoting cylinders, bubble-towers, gas scrubbers, pressure spheres, gas storage tanks, etc.—you can depend on COLE for vessels that are correct in design and permanently leakproof at the welded or riveted joints.

We also design and fabricate elevated tanks, acid tanks, dye vats, digestors, standpipes, storage tanks, etc. Write for latest Cole catalog—"Tank Talk."

Established 1854

R. D. COLE
MANUFACTURING CO.
NEWNAN, GA.
TANKS • TOWERS • VESSELS
CYLINDERS

DRILLING CONTRACTORS
Diamond and Shot Core Borings
Dry Sample Borings
Grout Holes and Pressure Grouting
Foundation Testing for Bridges, Dams and other Heavy Structures

Manufacturers, also of Diamond Core Drilling Machines and complete accessory equipment, including all types of Diamond Drilling Bits. Ask for Bulletin 320.

SPRAGUE & HENWOOD, Inc.
Dept. E, Scranton 2, Penna.

GUNITE
PNEUMATICALLY PLACED CONCRETE
dense—durable—high strength

for — Swimming Pools
Fireproofing Structural Steel
Lining Steel Stacks & Bunkers
Repairing Docks, Dams & Bridges
Reservoirs
Insulating Concretes
Water Main Lining
Thin Walls
Sewer Repairs
Lining Rock Tunnels
Pile Protection
Prestressed Tanks
Stucco Coatings
Pressure Grouting

Write for the 50-page Gunite Handbook
It contains complete engineering data and specifications, and many photos of actual Gunite jobs.

GUNITE CONSTRUCTION CORPORATION
420 LEXINGTON AVE., NEW YORK 17, N. Y.
MURRAY HILL 3-7699

Check price per pound of lifting capacity

There is a very quick way to determine which crane or excavator offers you biggest production capacity per dollar of equipment investment. Compare machines on the basis of price per pound of lifting capacity.

Remember, lift capacity is *work capacity*. Obviously, the machine with the heaviest lift rating *not* only picks up larger crane loads — it also has more strength and stability to handle bigger dragline and clamshell buckets on a wider work range — more power and speed to increase shovel and hoe production.

Check the Koehring lift ratings shown below — then ask your Koehring distributor to show you the figures on price per pound of lifting capacity.

compare for yourself:

KOEHRING MODEL	SIZE DIPPER	KOEHRING LIFT CAPACITIES (Crawler ratings based on 75% of tipping load. Rubber-tired machines — 85% of tipping load)		PRICE PER POUND OF LIFT CAP.*
205 CRAWLER	½-Yd.	20,000 lbs.	30-foot boom at 10-ft. radius	?
205 ON RUBBER	½-Yd.	30,000 lbs.	25-foot boom at 12-ft. radius	?
304 CRAWLER	¾-Yd.	27,800 lbs.	35-foot boom at 12-ft. radius	?
304 ON RUBBER	¾-Yd.	50,000 lbs.	30-foot boom at 10-ft. radius	?
405 CRAWLER	1-Yd.	40,000 lbs.	40-foot boom at 12-ft. radius	?
605 CRAWLER	1½-Yds.	72,300 lbs.	50-foot boom at 12-ft. radius	?
1005 CRAWLER	2½-Yds.	159,000 lbs.	50-foot boom at 12-ft. radius	?

Figures available on request—ask your Koehring distributor to see them.

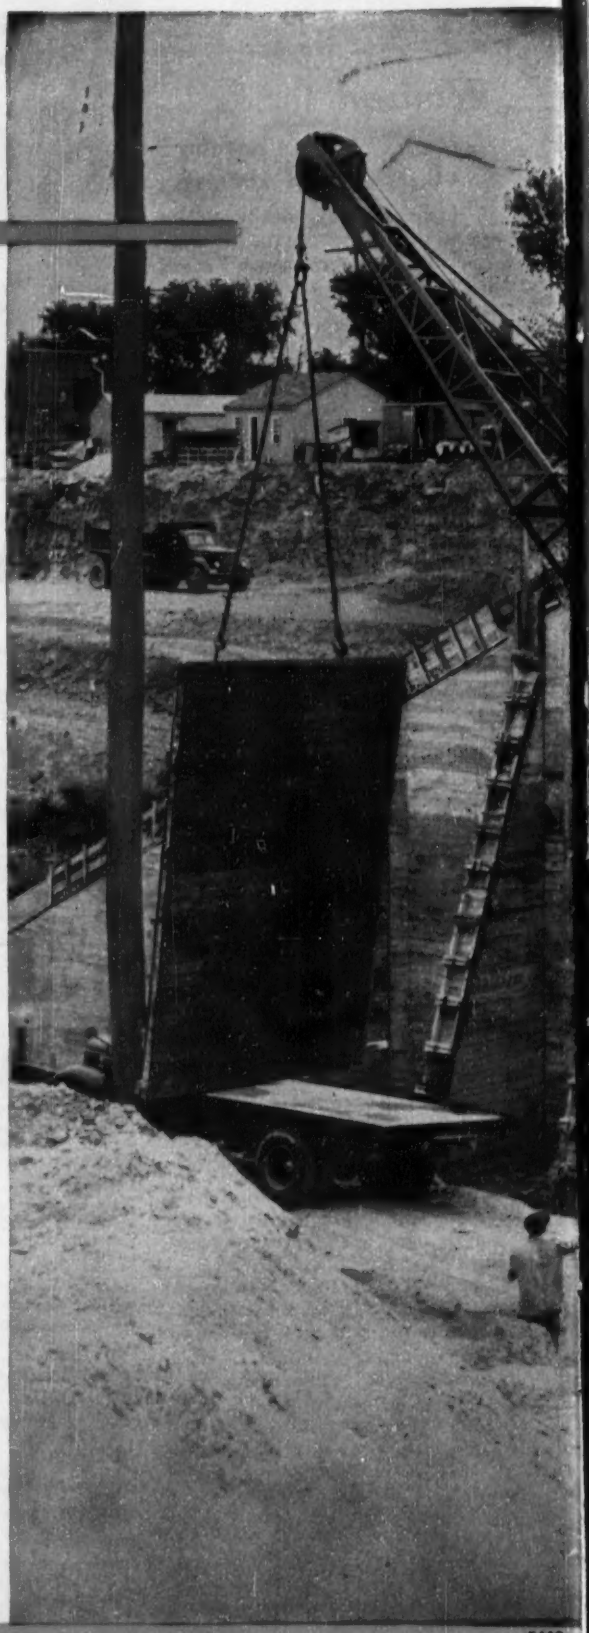

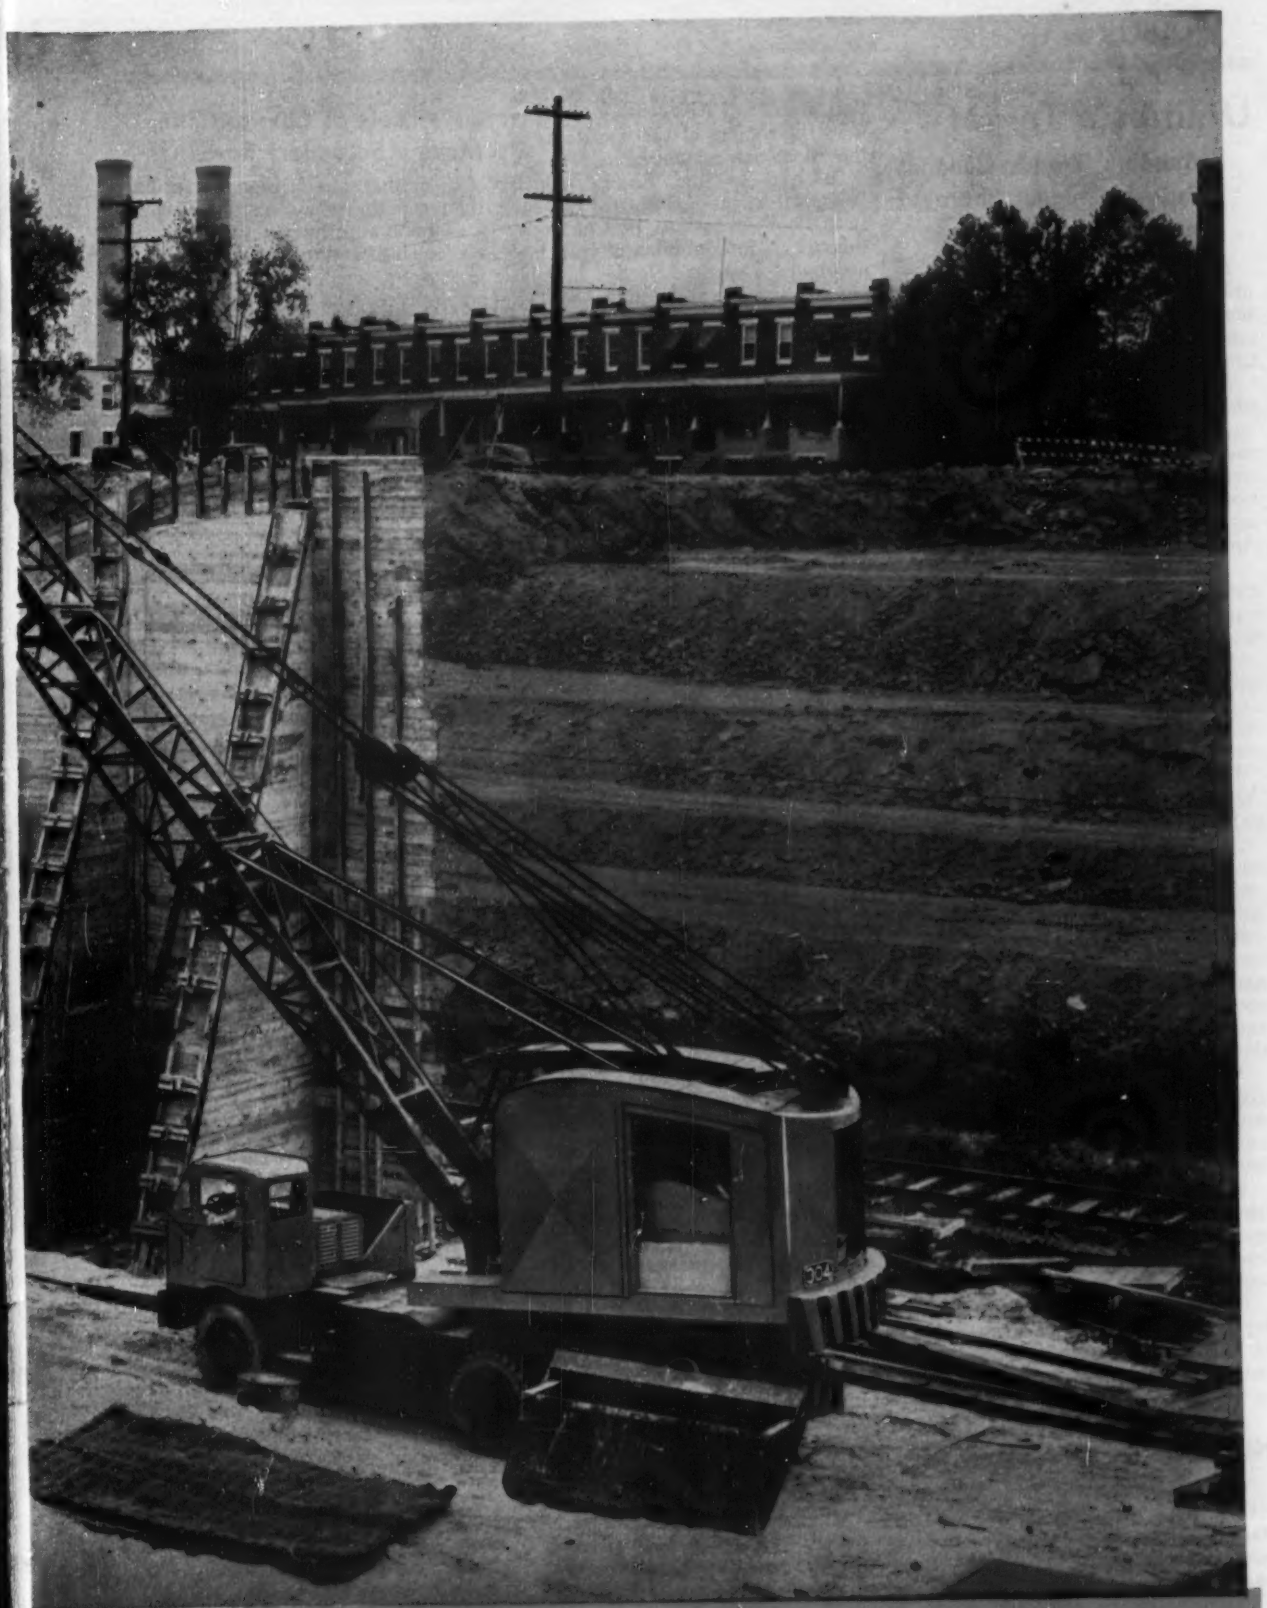

KOEHRING COMPANY Milwaukee 16, Wis. Subsidiaries: JOHNSON PARSONS · KWIK-MIX

Utilities a Target

Building Trades Councils look for bigger share of new construction work

Concerned over the way western utility companies get their construction work done, the AFL Far Western Conference of Building Trades Councils has moved into action.

It contends that new construction—which it says is a multi-million-dollar business—belongs to construction men and not to maintenance men. Its first step toward a redistribution of the work is a request to AFL headquarters in Washington to define new construction as related to utilities.

This decision was reached at the Far Western Conference's second annual convention held Nov. 27-28 in San Francisco.

A spokesman for the conference said utility companies have been hiring maintenance men to do new construction work at a lower rate than construction men would demand. "Worse yet," said the spokesman, "they have hired non-union laborers to fill out the work force."

The complaint, of course, is an old one to the construction trades. For years they have carried on at least verbal war against the force-account operations of state and other governmental construction agencies; and against major manufacturers who have made a practice of doing maintenance and other plant construction with their own maintenance forces.

Work involved in the jurisdictional dispute with the utilities includes construction of new pipelines, substations, buildings, roads and high tension lines.

Permitting maintenance men to do such work for repair purposes is the opening wedge, the spokesman said, leading to increasing use of maintenance men on new projects.

One solution to the problem, building trades feel, would be memoranda of understanding with utilities guaranteeing that new work would be let to private contractors.

NLRB Applies New Standards

To the $64 question—how will the NLRB apply its new jurisdictional standards to a dispute involving an association of employers?—the board has answered:

"Under the new standards, in determining whether to assert jurisdiction, the board will continue to consider the totality of the operations of the association members."

Involved in the dispute which evoked this announcement was the Insulation Contractors of California, Inc., which for a number of years had negotiated a single collective bargaining agreement with the union. In this type of bargaining, the board saw a desire on the part of all association members to be bound in their labor relations by joint rather than individual action. Thus, it reasoned, the association members constituted a single employer within the meaning of the Taft-Hartley Act.

Since the association members, in the aggregate, did more than $50,000 worth of business outside of California, the board was compelled to assert jurisdiction.

The standard in question—adopted by a board majority consisting of Farmer, Rodgers and Beeson—extends jurisdiction to an enterprise which annually produces or handles and ships goods out of state, or performs services outside the state, valued at $50,000 or more.

Compromise Called Key In Wage Arbitration Cases

Most arbitrated wage cases are compromises between union and management proposals—seldom is the position of either side completely sustained.

And in the mind of the arbitrator, the key question seems to be this: Who can best afford what?

That's the conclusion of Irving Bernstein, of the University of California's Institute of Industrial Relations, after analyzing 103 recent arbitration awards. He found that the arbitrator sided entirely with the union in only 11 cases—and with the employer in 16. The remaining 76 cases were compromises that were found to range from 25% to 75% of the demands.

Bernstein states in his new book, "Arbitration of Wages," (University of California Press), that only three factors appear to dominate an arbitrator's decision. These are:

1. Wage comparisons within the industry and with other industries.
2. Cost of living.
3. Employer's financial status.

Factors such as productivity, regularity of employment, strike records, and general economic considerations entered into only 3% of the cases analyzed.

Do Pickets at Common Site Make a Secondary Boycott?

In another split decision, NLRB has tightened the screws on picketing at a common construction site. Now, it says, such picketing is lawful only if it is "strictly" confined to the primary employer engaged in the dispute. Neutrals must be unequivocally disengaged.

Behind the decision was a dispute between the painters and an association of painting contractors in the Augusta (Ga.) and Aiken (S.C.) area. Because the signing of a contract had met with failure, the union tried to keep association members from doing business in the area by picketing construction jobs where an association member was doing the painting.

The mistake the union made was to give its pickets signs which read "This job is unfair . . ." Later the signs were changed to state the painting contractor in question "is unfair." But a majority of the board was unimpressed—they felt the change was not sufficient to knock out the initial impression that picketing applied to the entire job.

A minority of the board dismissed more lightly the complicated limitations on secondary boycotts and thought the majority had gone too far.

Carpenters Show Strength In Apprenticeship Record

Carpenters will remain the largest group of craftsmen in the entire construction industry—if the number of participants in their apprentice training programs is any criterion.

According to W. F. Patterson, director of the Labor Department's Bureau of Apprenticeship, more than 27% of all apprentices employed in the building trades at the present time are members of the carpentry trade—one of the first trades to adopt national apprenticeship standards for guidance of labor and contractors, in establishing apprentice training programs and joint committees.

He noted that more than 3,500 carpenter apprentices completed training last year. An additional 22,000 are still in training. Participating in the programs are approximately 19,000 contractors.

Two significant factors in the success of the programs, according to Patterson, are use of more effective preemployment tests (measuring both manual and mental ability) and increased use of visual aids, especially

(*Continued on page 115*)

WOLVERINE
. . . First in Quality

As a user of tubing you have every right in the world to expect that manufacturers, whose products you use, will do everything in their power to provide you with tubing that is consistently good —manufactured to the most rigid specifications.

That's the type of thinking Wolverine believes in. It's the reason that over the years so many plumbers, refrigeration engineers and automotive service men have come to rely on Wolverine so implicitly.

Wolverine realizes that each time you make a tubing installation you're laying your reputation on the line; that your business integrity will be judged by the service and satisfaction given by the products you use.

That's why every foot of Wolverine copper tube is quality controlled through every step of the manufacturing process. The result is tubing that will meet every demand put upon it—will never let you or your customers down.

It's this type of progressive thinking that has produced so many firsts—new ideas that have benefited the industry.

These are ideas, for example, like the introduction of cartoned tubing—introduced by Wolverine. Here was a new convenience that protected the tube, kept it clean and dry, made it easier to handle. This Wolverine innovation was so practical that it spread like wildfire through the entire industry.

There's no doubt about it. Wolverine is famous for the quality and the progressive thinking that is setting new standards in the tubing industry.

So remember when ordering tubing ask for it by name—specify Wolverine—and be sure. Remember, also, to always BUY FROM YOUR WHOLESALER. WOLVERINE TUBE, Division of Calumet & Hecla, Inc., 1425 Central Avenue, Detroit 9, Michigan.

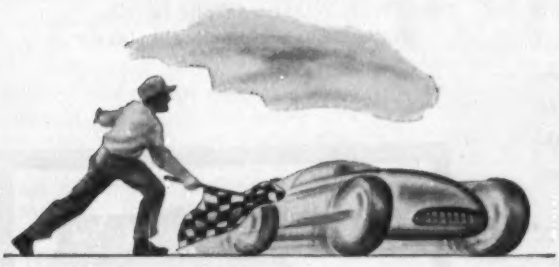

BUY FROM YOUR WHOLESALER

WOLVERINE TUBE
DIVISION OF CALUMET & HECLA, INC.
Manufacturers of Quality-Controlled Tubing and Extruded Aluminum Shapes

PLANTS IN DETROIT, MICHIGAN, AND DECATUR, ALABAMA. SALES OFFICES IN PRINCIPAL CITIES.
EXPORT DEPARTMENT, 13 EAST 40TH STREET, NEW YORK 16, N. Y.

LOCK JOINT

for efficient and easy subaqueous installation

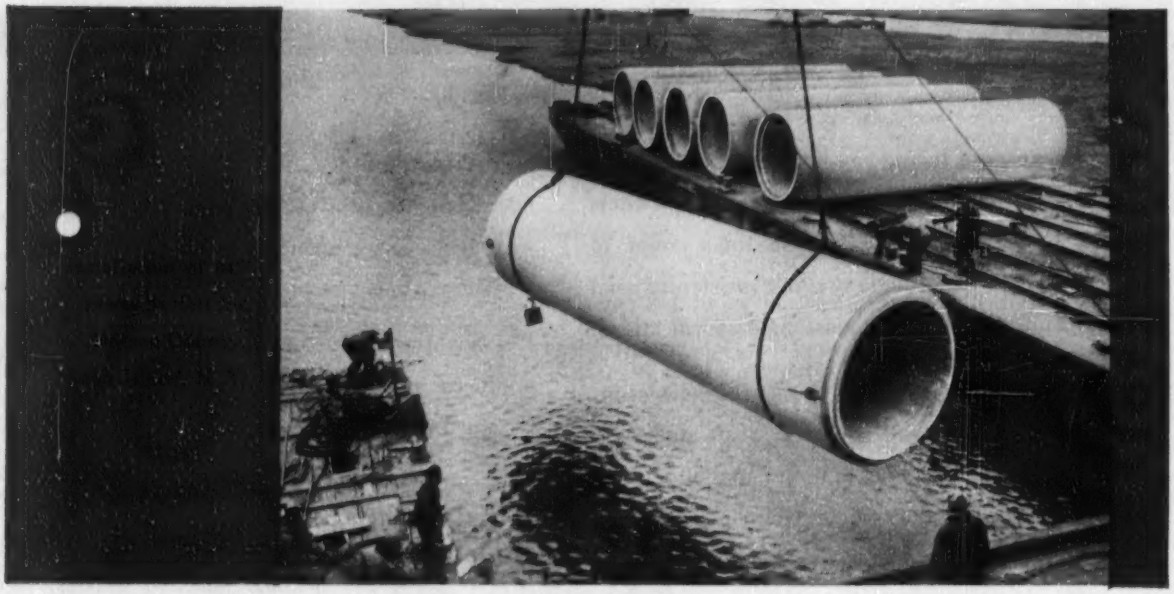

Ideal for water intakes, sewer outfalls and river crossings, Lock Joint Reinforced Concrete Subaqueous Pipe provides the simplest, most effective method of joining pipe under water. The self-centering Rubber and Steel joint can be drawn together accurately and easily by merely taking up the nuts on two draw bolts of a special joint harness. Once the joint has been pulled "home," the compressed rubber gasket seals a permanent, watertight, flexible joint which requires no further bolting, caulking or welding.

Added advantages of Lock Joint pipe are the absence of tuberculation or corrosion, long life, permanent high carrying capacity and minimum maintenance costs. If your pressure pipe project requires pipe 16" in diameter or larger, you owe it to yourself to investigate the unexcelled characteristics offered by Lock Joint.

One of the leading producers of sewer and culvert pipe, Lock Joint Pipe Co. also manufactures pressure pipe for:

- TRANSMISSION MAINS
- INDUSTRIAL INSTALLATIONS (Supply, circulating and cooling systems)
- DISTRIBUTION MAINS
- WATER WORKS OPERATIONS (Pumping and treatment plant piping)
- SEWER WORKS OPERATIONS (Force mains and treatment plant piping)

LOCK JOINT PIPE COMPANY

Established 1905

P. O. Box 269, East Orange, N. J.

PRESSURE PIPE PLANTS: Wharton, N. J., Turner, Kan., Detroit, Mich., Columbia, S. C.

SEWER & CULVERT PIPE PLANTS:

Casper, Wyo. • Cheyenne, Wyo. • Denver, Col. • Kansas City, Mo. • Kennett Square, Pa. Valley Park, Mo. • Chicago, Ill. • Rock Island, Ill. • Wichita, Kan. • Kenilworth, N. J. Hartford, Conn. • North Haven, Conn. • Tucumcari, N. Mex. • Oklahoma City, Okla. • Tulsa, Okla. • Beloit, Wis. • Hato Rey, P. R. • Ponce, P. R. • Caracas, Venezuela • Wholly Owned Subsidiary, Great Lakes Pipe Co., Plants: Buffalo, N. Y. • W. Henrietta, N. Y.

LOCK JOINT Reinforced Concrete PRESSURE PIPE

LABOR

motion pictures, in classroom work. He suggested careful consideration be given an applicant's financial ability to undertake training and noted this as an important factor in quittals (ENR Oct. 14, p. 28).

Labor Briefs . . .

• **Plattsburg dispute**—Arbitration of the upstate New York carpenters' dispute (ENR Nov. 25, p. 50) got off to a slow start on Dec. 1. After BTEA introduced some preliminary evidence, the hearing was adjourned to Dec. 17.

• **Joppa, Paducha disinterred**—Last week, the U. S. District Court in St. Louis selected the jury and started trial of Evan R. Dale and James Bateman, powerful southern Illinois labor leaders. Both are accused of violating the federal antiracketeering act during construction of atomic energy facilities at Joppa, Ill., and Paducah, Ky. (ENR Aug. 13, 1953, p. 21).

• **Why no raise?**—NLRB has ruled that an employer pleading financial inability as a reason for refusing to meet wage demands must, upon request, "attempt to substantiate his economic position by reasonable proof"—otherwise it will not be bargaining in good faith.

• **Labor Standards Board**—Philadelphia has set up a five-man Board of Labor Standards, representing the city, labor and industry, to serve in an advisory capacity in construction contract awards by the city.

• **Railway engineers**—A new union has come into being under the aegis of Engineers and Scientists of America with organization of Railway Technical Engineers—ESA. Formed by the engineering employes of Chicago and Northwestern Railroad, it will attempt to organize the estimated 10,000 civil, mechanical and electrical engineers now on U. S. railroad payrolls.

• **Atom strike ends**—The short-lived strike of 300 guards that halted construction of the atomic energy plant in Ohio's Pike County ended in a wage settlement with Peter Kiewit & Sons Co., prime contractor.

• **Workmen's compensation**—Tennessee's State Medical Assn. is drafting new legislation designed to knock out the ceiling on the amount of hospital and medical expenses payable under the present workmen's compensation law. A 1953 amendment put the ceiling at $1,500.

OFFICIAL PROPOSALS

Bids: December 21, 1954

New Jersey Turnpike Authority

CONTRACTS NOS. N-49A & N-49B

Proposals are invited for Contract Nos. N-49A & N-49B which, in connection with the Newark Bay-Hudson County Extension of the New Jersey Turnpike, involves the construction of water supply and sewerage systems and the construction of electrical distribution, street and perimeter lighting and fire alarm systems, respectively, and other incidental work on U. S. Government property at Caven Point Terminal, Jersey City, New Jersey.

Proposals will be received at the New Jersey Turnpike Authority Administration Building, New Brunswick, New Jersey, until 11:00 o'clock Eastern Standard Time on the morning of December 21, 1954, at which time and place said proposals will be publicly opened and read.

Bidders must submit with their proposal a Contractor's Financial and Equipment Statement.

Contract documents may be examined during office hours after December 6, 1954, at the office of the Authority and at the office of the Consulting Engineers, Howard, Needles, Tammen & Bergendoff, 55 Liberty Street, New York 5, New York. Contract documents will be furnished upon payment of Ten Dollars ($10.00) for each set, upon application to the Authority. Contract documents are not required to be returned and the payment will not be refunded.

NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast, Chairman

December 3, 1954

Bids: January 6, 1955

New Jersey Turnpike Authority

CONTRACT NO. N-20

Proposals are invited for Contract No. N-20 which involves the fabrication and erection of superstructure steelwork for the Bayview Viaduct, extending from the Caven Point Road Interchange to Bayview Avenue, in Jersey City, Hudson County, New Jersey, in connection with the construction of the Newark Bay-Hudson County Extension of the New Jersey Turnpike.

The Principal items of work include:

Structural Steel	4,295,000 Lbs.
Furnishing Metal Railing	3,300 Lin. Ft.

Proposals will be received at the New Jersey Turnpike Authority Administration Building, New Brunswick, New Jersey, until 11:00 O'Clock Eastern Standard Time on the morning of January 6, 1955 at which time and place said proposals will be publicly opened and read.

Bidders must submit with their proposal a Contractor's Financial and Equipment Statement.

Contract documents may be examined during office hours after December 8, 1954, at the office of the Authority and at the office of the Consulting Engineers, Howard, Needles, Tammen & Bergendoff, 55 Liberty Street, New York 5, N. Y. Contract documents will be furnished upon payment of Fifteen Dollars ($15.00) for each set, upon application to the Authority. Contract documents are not required to be returned and the payment will not be refunded.

NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast, Chairman

December 9, 1954

U. S. Government

Department of Commerce, Bureau of Public Roads, November 30, 1954. SEALED BIDS will be received at the office of the Division Engineer, Bureau of Public Roads, 1440 Columbia Pike, Arlington, Virginia, until 11:00 a.m., E.S.T., JANUARY 11, 1955, for Project 3B7C5D4, Shenandoah National Park, Albemarle and Augusta Counties, Virginia. 16.252 miles paving and other work from Big Flat Mountain to Jarman Gap. The approximate quantity of the principal item is 30,500 tons Type H-1 Asphalt Pavement, Liquefier Type. Minimum wage rates have been fixed as required by law. Plans, specifications, and proposal forms are available upon request at the address given above or Bureau of Public Roads, 920 South Jefferson Street, Roanoke, Virginia. · H. J. Speiman, Division Engineer.

OFFICIAL PROPOSALS

Bids: January 5, 1955

The Hydro-Electric Power Commission of Ontario

ST. LAWRENCE POWER PROJECT
TENDERS FOR PROVISION
OF
CRUSHED ROCK OR CRUSHED GRAVEL AND SAND

SEALED TENDERS, in quadruplicate, will be received by The Hydro-Electric Power Comission of Ontario up to 4:30 o'clock P.M. Eastern Standard Time on

Wednesday, January 5, 1955

for the provision of crushed rock or crushed gravel and sand, to be used as concrete aggregate in the construction of the Commission's St. Lawrence Power Project and associated work in the vicinity of Cornwall, Ontario. Details of optional conditions and quantities are shown in the Tendering Documents.

Copies of Tendering Documents may be obtained on and after December 1, 1954, at the office of the Director of Supply, The Hydro-Electric Power Commission of Ontario, 620 University Avenue, Toronto 2, Ontario, on payment of $10.00 per set, no part of which will be refunded.

Tendering Documents may be inspected at the above location and at the offices of the following: The Commission's Field Office, Mille Roches, Ontario; Power Authority of the State of New York, 270 Broadway, New York 7, New York; and Uhl, Hall and Rich, 230 Congress Street, Boston 10, Massachusetts.

Each tender must be accompanied by a certified cheque for the sum of Fifty Thousand Dollars ($50,000.00). Provisions as to the return of the cheque appear in the tendering documents.

The successful tenderer will be required to furnish a performance bond, in the form approved by the Commission, and issued by a bonding company, licensed as such in the Province of Ontario and acceptable to the Commission, for One Hundred per cent (100%) of the total amount of the contract.

The lowest or any tender will not necessarily be accepted.

Robert H. Saunders, C.B.E., Q.C.,
Chairman, and Members of
The Hydro-Electric Power Commission of Ontario,
620 University Avenue,
Toronto 2, Ontario.

Bids: January 6, 1955

Construction of Bridge

SEALED PROPOSALS will be received by the undersigned, acting for Lehigh County and the City of Allentown, at his office in the Lehigh County Court House Annex Bldg., Allentown, Pa., for the construction of a new bridge, with approaches, and Lawrence Street overpass, leading from South 15th Street to Wyoming Street, via Ward Street, Allentown, Pa., until 11:00 o'clock A.M. (E.S.T.) January 6, 1955 and publicly opened after 11:15 o'clock A.M. (E.S.T.) of the same day in the office of the County Commissioners.

Copies of plans, specifications and proposal forms may be obtained at the Office of G. Edwin Pidcock Co., Consulting Engineers, B. & B. Building 546-548 Hamilton St., Allentown, Pa., upon payment of Two Hundred Dollars ($200.00) for each set. Any Bidder, upon returning such set in good condition within ten (10) days after the opening of the proposals will be refunded One Hundred Fifty Dollars ($150.00) of his payment. If he submits no bid, only One Hundred Dollars ($100.00) of his payment will be refunded. Proposals may be submitted for any one, any two, or all three of the types of construction stated in the Proposal Forms provided.

Each Bidder must deposit with his proposal, a certified check or Surety Company's Bond in an amount of not less than five (5) percent of the base bid in the form as outlined in the "Instructions to Bidders".

Proposals must be sent in on regular forms prepared by the Consulting Engineers, in an envelope properly identified, and in the hands of the County Controller at or before the time above mentioned.

No Bidder may withdraw his proposal within fifteen (15) days after the actual date of the opening thereof.

The Board of Commissioners of Lehigh County, reserves the right to waive any informalities in, or to reject any or all proposals.

Alan F. Weinsheimer,
County Controller

(Continued on following page)

OFFICIAL PROPOSALS

(Continued from page 115)

Bids: December 23, 1954

New York State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.,—Pursuant to the provisions of the Highway Law, Public Buildings Law, and Article 2, Title 9 of the Public Authorities Law, and special provisions for projects financed with Federal Aid Funds, sealed proposals will be received until ten-thirty o'clock A.M., eastern standard time on the 23rd day of DECEMBER 1954, by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects:

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
DISTRICT No. 1, N. F. Ronan, District Engineer (Acting), 353 Broadway, Albany, N. Y.						
Albany Greene Schenectady	CT 54-6 MT 54-9	New York State Thruway–Catskill and Mohawk Sections 1, 2, 3, 3A, 5, 6, 7 and 8 (Ulster County Line to Montgomery County Line)		Furnish & Erect 408,000 L. F. Fence	$32,000 Plans $15	$597,000
DISTRICT No. 2, Wm Robinson, District Engineer, 301 E. Water Street, Syracuse, N. Y.						
Onondaga	FAC 54-16 FGSH 54-17	City of Syracuse: State Fair Boulevard Lake Onondaga West Shore Development, Northwest Arterial Connection (Cont. 1) Proj. U & UG991(4)	(0.30 Acc.) 1.30	Grading, Drainage & Sand Drains R. R. Sep. Comp. I-Beam 212'	$120,000 Plans $25	2,326,000
DISTRICT No. 5, C. R. Waters, District Engineer, 65 Court Street, Buffalo, N. Y.						
Erie	FA NTC 54-2	New York State Thruway–Niagara Section–Sub. N4 (Court St. to Main St.); Fuhrmann Blvd. Interchange Proj. U865(6)	(0.69 Acc.) 0.82	Two Cnc. Cem. Conc. Pvt., 2 at 37' Var. Wide=0.155 Mi., Asp Conc. Ty. 2A (Access)=0.69 Mi.; 58 Span Cem. Conc. Paved Viaduct=0.665 Mi.	$420,000 Plans $100	7,639,000
DISTRICT No. 6, J. H. Thomas, District Engineer, 30 West Main Street, Hornell, N. Y.						
Chemung	FATC 54-4	Horseheads Village, FASH 53-5, 5162; Elmira-North Elmira Ext. FASH 54-16; Horseheads-Corning, SH 358 Elmira-North Elmira, SH 1378; Horseheads-Montour Falls, SH 5206; Elmira-Horseheads Connection, Pt. 2, FASH 54-15; Horseheads Village: South Main & Main Streets, SH 9228; Proj. No. U221(7); U479(12); U661(5)		Traffic Signal & Lighting System	$3,500 Plans $10	59,000
Steuben	FARC C54-108	City of Corning: Denison Parkway Extension F.A.C. 49-4 Proj. U225(9)	0.21	Storm Water Sewer	$2,400 Plans $10	41,000
DISTRICT No. 7, R. W. Sweet, District Engineer, 444 Van Dusee Street, Watertown, N. Y.						
Franklin	FARC 54-107	Nicholville-Dickinson, Pt. 2, SH 9265 Dickinson-West Bangor, Pt. 2, SH 9076 Malone-Dickinson, Pt. 2, SH 1383 Proj. S 305(3)	0.99	Asp. Conc. Opt.=0.97 Mi. Misc. Work=0.02 Mi.	$11,000 Plans $15	205,000
DISTRICT No. 8, J. S. Bixby, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.						
Ulster	CT 54-4	New York State Thruway–Catskill Section–Subs. 1 & 2 (Kingston-Saugerties-Greene Co. Line)	9.77	Furnish & Install 51,600 Fencing	$4,500 Plans $10	79,000
Westchester	FA NETC 54-10 FA NET 54-11	New York State Thruway–New England Section, Sub. 4 (Mamaroneck Av.-Central Av.)Proj. F and FI-1068(8)	(2.37 Acc.) 2.84	9 Cem. Conc. Pavt., 2 at 37' Var. Wide=4.20 Mi. Asp. Conc., Opt.=0.82 Mi. Misc. Work=0.19 Mi. 7 Hy. Sups. Comp. I-Beams, 169', 172', 172.2', 107.7' 114', 62' & 119.2'; 2 Brs. Reinf. Conc. Slabs 56.8' & 36'; 1 R.R. Sep. Comp. I-Beam, 152'	$350,000 Plans $100	6,485,000
DISTRICT No. 9, F. W. Donovan, District Engineer, 71 Frederick St., Binghamton, N. Y.						
Broome	FARC C54-108 FAC 54-17	Binghamton City: Vestal Ave. Bypass, FAC 49-8 Binghamton City: Court St.–Rte 17 Connection Susquehanna River Bridge Project U1019(4)	(3.28 Acc.) 0.91	Asp. Conc. Type 2A=0.91 Mi. Asp. Conc. Type 2A (Access)=2.17 Mi. Asp. Conc. Opt. (Access)=0.11 Mi. Br. 5 Span Deck Girder 642' Hy. Sep. Comp. I-Beam 165.4'	$250,000 Plans $50	4,460,000
Delaware	54 BWS 3, 3D, 10, 10A, 10AT	New York City Board of Water Supply (Pepacton Reservoir) Rds. 3, 3D, 10, 10A and 10AT	7.34	Bit. Mac. Ty. 1 (Pen. Meth.)=7.30 Mi. Found. Course Gravel=0.04 Mi. 2 Box Brs. 33.8' and 20.5'	$91,000 Plans $25	1,658,000
Sullivan	RC 54-102	Narrowsburg-Callicoon, Pt. 3, S.H. 8449 Callicoon-Long Eddy, Pt. 2, S.H. 8494	0.33	Repair, Clean & Paint 2 Bridges	$1,700 Plans $10	31,000
DISTRICT No. 10, M. E. Goul, District Engineer, Montauk Highway at Little E. Neck Rd., Babylon, L. I., N. Y.						
Bronx	FA NETC 54-13P	New York State Thruway–New England Section Sub. 6 (Cont. 2) Proj. UI-1068(9)	(6.58 2.00	9" Cem. Conc. Pavt. Var. Wide=5.38 Mi. Asp. Conc. Opt.=2.13 Mi. Sheet Asp. Pavt.=1.96 Mi. Misc. and Electrical Work=0.01 Mi.	$215,000 Plans $50	3,904,000
Queens	FA HHE 54-1	Horace Harding Expressway, Sect. II (Cont. No. 3A) Proj. U862(5)	(0.40 Acc.) 0.53	Grad., Drain. & Misc. Work=0.53 Mi. Cem. Conc. Pavt. (Access)=0.23 Mi.; Asp. Conc. Opt. (Access)=0.17 Mi. Hy. Sep. Comp. I-Beam 242'	$144,000 Plans $100	2,626,000

Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts and Accounts, Albany, N. Y., and at the office of the District Engineers noted above, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated above. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement, and to the special provisions applying to projects financed with federal funds. Award of a contract is subject to priorities and allocations under the Defense Production Act of 1950, as amended, and all regulations issued thereunder.

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Laws, as set forth in "Instructions to Bidders."

When optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated.

The right is reserved to reject any or all bids.

B. D. TALLAMY
SUPT. OF PUBLIC WORKS

Bids: December 16, 1954

Joint Meeting, City Hall, East Orange, N. J. New Joint Trunk Sewer—Section VI

Sealed proposals for the construction of a new Joint Trunk Sewer, Section VI will be received for the following municipalities:

The City of East Orange, Township of Hillside, Town of Irvington, Township of Maplewood, Township of Millburn, City of Newark, Borough of Roselle Park, Village of South Orange, City of Summit, Township of Union, and Town of West Orange, New Jersey, organized in Joint Meeting under the provision of an Act entitled,

"An Act to authorize two or more municipalities in this state to jointly construct and maintain outlet or trunk sewers" approved March 15, 1899, and the supplements and amendments thereto, hereinafter referred to as the Joint Metting.

Said proposals will be received in the Council Chamber, City Hall, East Orange, New Jersey, at four o'clock P.M. (4:00 P.M.) Eastern Standard Time on Thursday, December 16, 1954 and at that time and place will be publicly opened and read aloud. The proposals shall be in accordance with the specifications, plans, terms of the proposed contract, and form of bond on file with the Joint Meeting.

The contract involves construction of a trunk sewer complete with appurtenances approximately 10,000 feet in length and 42 inches to 24 inches in diameter along a route located in the Township of Millburn, N. J. No bids will be received unless made in writing on forms furnished, and unless accompanied by a certified check made payable to the Treasurer of the Joint Meeting for an amount not less than ten per cent (10%) of the amount of the bid.

Bidders shall enclose as part of their sealed proposal a statement of commitment by a corporate surety company authorized to do business in New Jersey that such company will underwrite and issue to the Joint Meeting a performance bond in statutory form in behalf of the contractor.

Bidders will be required to file with their bid a standard form of questionnaire and financial statement containing a complete statement of the bidder's ability, available equipment, financial standing and experience in performing work of the type contemplated.

The Joint Meeting reserves the right to reject any or all bids, and to accept that one which, in its judgment, best serves the interests of the contracting municipalities.

Plans and specifications may be seen at the office of Edward P. Decher, Secretary of the Joint Meeting, City Hall, Newark, New Jersey. They may be seen or obtained at the office of the Consulting Engineer, Elson T. Killam, 529 Millburn Ave., Millburn, N. J.; upon payment of $15.00 for each set. The deposit will be returned only to Contractors submitting bona fide proposals who return the plans and specifications in good condition within ten (10) days after opening of bids.

By Order of the Joint Meeting.
Milo S. Borden
Chairman
Edward P. Decher
Secretary

Elson T. Killam
Consulting Engineer

OFFICIAL PROPOSALS

Bids: December 20, 1954

Charleston, W. Va.

SECTION ONE: UNIT ONE
KANAWHA EAST INTERCEPTORS,
CAPITOL STREET TO ELK RIVER
CHARLESTON, W. VA.

The Sanitary Board of the City of Charleston, Charleston, West Virginia, will receive sealed bids for "Kanawha East Interceptors, Capitol Street to Elk River", until 2 P.M. Eastern Standard Time on the 20th day of December, 1954, at the office of the Sanitary Board, Room 15, City Building, at which time and place all bids will be publicly opened and read aloud.

The successful bidder will be required to furnish a satisfactory performance bond in the amount of 100 per cent of contract.

Liquidated damages for delay will be One Hundred Dollars ($100.00) per day for each calendar day beyond the date specified in the contract.

The contract documents, including plans and specifications are on file at the office of the Sanitary Board, City Building, Charleston, West Virginia, and at the office of Settle Engineers, Inc., 2nd Floor Peoples Building, Charleston, West Virginia, where they may be examined free of charge.

Copies of the documents may be obtained by depositing Forty Dollars ($40.00) with Settle Engineers, Inc., 2nd Floor Peoples Building, Charleston, West Virginia, for each set of documents so obtained. The amount of the deposit for one (1) set of documents will be refunded to each actual bidder who returns the plans and documents in good condition within five (5) days after the opening of bids.

The Sanitary Board of The City of Charleston reserves the right to reject any or all bids and to waive any informalities in bidding.

A certified check or cashier's check, payable to The Sanitary Board of The City of Charleston, West Virginia, or a satisfactory bid bond executed by the bidder and a surety company authorized to do business in West Virginia, in an amount of dollars at least equal to five per cent (5%) of the bid or an equal amount of U. S. Government Bonds, shall be submitted with each bid.

No bid may be withdrawn, after the scheduled closing time for receipt of bids, for at least sixty (60) days thereafter.

THE SANITARY BOARD OF THE
CITY OF CHARLESTON
By: Donald C. Shonk
Secretary

U. S. Government

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4306) will be received at Superior, Nebraska, until January 18, 1955, for furnishing labor and materials for earthwork and structures, Franklin Canal, Station 2178/20 to End, and Franklin Laterals, Second Section. Location: vicinity of Red Cloud, Nebraska, in Franklin and Webster counties. Principal items are: excavation, 400,000 cu. yds; concrete, 1,140 cu. yds; furnishing and laying 1,275 lin. ft. (18 inch to 36 inch diameter) concrete culvert pipe; furnishing and laying 14,200 lin. ft. (18 inch to 30 inch diameter) concrete pressure pipe; and other work. The work is divided into 2 schedules. Completion time 430 days. For particulars, address Bureau of Reclamation, Superior, Nebraska; or Building 53, Denver Federal Center, Denver, Colorado. W. A. Dexheimer, Commissioner.

DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-4302) will be received at Sargent, Nebraska, until January 6, 1955, for furnishing labor and materials for Gavins Point-Belden, 115-kilovolt Transmission Line, Transmission Division, Nebraska, Missouri River Basin Project. Location: Gavins Point Switchyard (proposed) to Belden Substation, near Belden, Nebraska, in Cedar County. Principal items are: 286 structures furnishing and construction various H-frame, wood pole structures; 250 X-Braces furnishing, assembling, and attaching X-Braces; 867 assemblies furnishing additional hardware, assembling, and attaching insulator assemblies; 32.5 miles of line furnishing and stringing three 556,500 circular mil ACSR conductors; 32.5 miles of line furnishing and stringing two 3/8 inch, galvanized steel overhead ground wires; and other work. Completion time 180 days. For particulars, address Bureau of Reclamation, Sargent, Nebraska; or Building 53, Denver Federal Center, Denver, Colorado. W. A. Dexheimer, Commissioner.

OFFICIAL PROPOSALS

Bids: December 21, 1954

Fairfax County, Virginia
Integrated Sewerage System

Sealed bids will be received by the Board of County Supervisors of Fairfax County, Virginia, at the Office of the Sanitary Engineer, County of Fairfax, Virginia, until Tuesday, December 21, 1954, at 2:00 o'clock, P.M., Eastern Standard Time, for the construction of:

CONTRACT NO. 35: Approximately 45,700 lineal feet of 8 to 30 inch sanitary sewers and appurtenances.

Promptly thereafter they will be publicly opened and read in the Board of County Supervisors Room, County Office Building, Fairfax, Virginia.

Plans, specifications, and contract documents may be examined and copies thereof may be obtained at the Office of the Sanitary Engineer, upon payment of Ten Dollars ($10.00) per set, which amount shall not be returnable.

All bids must be on separate form furnished by the County.

Contractors, whether resident or nonresident in Virginia, will be required to show evidence of a Certificate of Registration as required by Chapter 7 of Title 54 of the Code of Virginia before their bids will be considered, if the bid is $20,000 or more.

Each bid must be accompanied by cash, or by the certified check of the bidder, made payable to the Director of Finance, County of Fairfax, Virginia, or by an acceptable bidder's bond in an amount of not less than Five Percentum (5%) of the amount of the total bid. The successful bidder will be required to furnish a performance and maintenance bond in a penal sum equal to the full contract price.

No bid may be withdrawn for a period of thirty (30) days after the actual opening thereof and the right is reserved to waive any informality therein and to reject any or all bids.

COUNTY OF FAIRFAX, VIRGINIA
By: Harry L. Hale
Sanitary Engineer

Dated: Dec. 1, 1954

Bids: December 23, 1954

Construction of Sanitary Sewers

CONSTRUCTION OF SANITARY SEWERS
IN SOUTHWEST SECTION
CITY OF POUGHKEEPSIE,
DUTCHESS COUNTY, NEW YORK

Sealed bids for construction of sanitary sewers in the Southwest Section of the City of Poughkeepsie will be received by the Commissioner of Finance, City Hall, Poughkeepsie, New York until 10:00 A.M., Eastern Standard Time, Thursday, December 23, 1954, and there at said office and at said time will be publicly opened and read aloud.

This Contract includes the construction of approximately 425 linear feet of 10-inch sewer and approximately 20,000 linear feet of 8-inch sewer and appurtenances, together with a small sewage lift station and approximately 900 linear feet of 4-inch cast iron force main.

Plans and Documents may be examined at no expense at the office of the Commissioner of Finance, City Hall, Poughkeepsie, New York, and copies of the same obtained there upon payment of $10.00 for each set. Any bidder upon returning said set in good condition within thirty (30) days of the date of receiving bids will be refunded his payment, and any non-bidder upon so receiving said set will be refunded $5.00.

The Plans and Documents may be examined in the office of the Superintendent of Public Works, Eastman Park, Poughkeepsie, New York, or at the office of O'Brien & Gere, Consulting Engineers, 204 East Jefferson Street, Syracuse 2, New York.

Each bid must be accompanied by security in amount not less than five per centum (5%) of the amount of the bid in the form and subject to the conditions provided in the Information for Bidders contained in the Contract Documents.

The right is reserved to waive any informalities in the bids and to reject any or all bids.

DEPARTMENT OF FINANCE OF THE
CITY OF POUGHKEEPSIE
By: AUBREY B. COONS
Commissioner of Finance

Dated: December 2, 1954

Bids: December 30, 1954

Fairfax County, Virginia
Integrated Sewerage System

Sealed bids will be received by the Board of County Supervisors of Fairfax County, Virginia, at the Office of the Sanitary Engineer, County of Fairfax, Fairfax, Virginia, until Thursday, December 30, 1954, at 2:00 o'clock, P.M., Eastern Standard Time, for the construction of:

CONTRACT NO. 36: Approximately 55,000 lineal feet of 8 to 16 inch sanitary sewers and appurtenances.

Promptly thereafter they will be publicly opened and read in the Board of County Supervisors Room, County Office Building, Fairfax, Virginia.

Plans, specifications, and contract documents may be examined and copies thereof may be obtained at the Office of the Sanitary Engineer, upon payment of Ten Dollars ($10.00) per set, which amount shall not be returnable.

All bids must be on separate form furnished by the County.

Contractors, whether resident or nonresident in Virginia, will be required to show evidence of a Certificate of Registration as required by Chapter 7 of Title 54 of the Code of Virginia before their bids will be considered, if the bid is $20,000 or more.

Each bid must be accompanied by cash, or by the certified check of the bidder, made payable to the Director of Finance, County of Fairfax, Virginia, or by an acceptable bidder's bond in an amount not less than Five Percentum (5%) of the amount of the total bid. The successful bidder will be required to furnish a performance and maintenance bond in a penal sum equal to the full contract price.

No bid may be withdrawn for a period of thirty (30) days after the actual opening thereof and the right is reserved to waive any informality therein and to reject any or all bids.

COUNTY OF FAIRFAX, VIRGINIA
By: Harry L. Hale
Sanitary Engineer

Dated: December 9, 1954

Bids: December 30, 1954

New Jersey Turnpike Authority

CONTRACT NO. N-27A

Proposals are invited for Contract No. N-27A which involves the fabrication and erection of the superstructure steelwork for a portion of the North Terminal Ramps, extending from Pier 27 of the West Viaduct at Second Street to Pier SB 25 on the Southbound Ramp and Pier NB 24 on the Northbound Ramp, both at Tenth Street, and other incidental work, in Jersey City, Hudson County, New Jersey, all in connection with the construction of the Newark Bay-Hudson County Extension of the New Jersey Turnpike.

The principal items of work include:

Structural Steel	6,815,000 Lbs.
Furnishing Metal Railing	7,900 Lin. Ft.

Proposals will be received at the New Jersey Turnpike Authority Administration Building, New Brunswick, New Jersey, until 11:00 O'Clock Eastern Standard Time on the morning of December 30, 1954 at which time and place said proposals will be publicly opened and read.

Bidders must submit with their proposal a Contractor's Financial and Equipment Statement.

Contract documents may be examined during office hours after December 3, 1954, at the office of the Authority and at the office of the Consulting Engineers, Howard, Needles, Tammen & Bergendoff, 55 Liberty Street, New York 5, New York. Contract documents will be furnished upon payment of Fifteen Dollars ($15.00) for each set, upon application to the Authority. Contract documents are not required to be returned and the payment will not be refunded.

NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast, Chairman

December 2, 1954

OFFICIAL PROPOSAL

RATE: $1.80 per line (or fraction) per insertion.

CLOSING DATE: 10:30 a.m. Friday for issue out following Thursday.

SEND COPY: Official Proposal Division, Engineering News-Record, 330 W. 42nd St., New York 36, N. Y.

OFFICIAL PROPOSALS

Bids: January 6, 1955

Infirmary Building
Willowbrook State School
Staten Island, N. Y.

NOTICE TO BIDDERS

Separate sealed proposals covering Construction, Heating, Sanitary, Electric and Refrigeration Work for Infirmary Building, (Building No. 10), Willowbrook State School, Staten Island, N. Y., in accordance with Specifications Nos. 18211, 18212, 18213, 18214 and 18216 and accompanying drawings, will be received by Henry A. Cohen, Director, Bureau of Contracts and Accounts, Department of Public Works, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., on behalf of the Department of Mental Hygiene, until 2:00 o'clock P.M., Eastern Standard Time, on Thursday, January 6, 1955, when they will be publicly opened and read.

Each proposal must be made upon the form and submitted in the envelope provided therefor and shall be accompanied by a certified check made payable to the State of New York, Commissioner of Taxation and Finance, of 5% of the amount of the bid as a guaranty that the bidder will enter into the contract if it be awarded to him. The specification number must be written on the front of the envelope. The blank spaces in the proposal must be filled in, and no change shall be made in the phraseology of the proposal. Proposals that carry any omissions, erasures, alterations or additions may be rejected as informal. The State reserves the right to reject any or all bids. Successful bidders will be required to give a bond conditioned for the faithful performance of the contract in the sum of 100% of the amount of the contract, and a separate bond for the payment of laborers and materialmen as follows: on contracts not more than $500,000.00, 100% of the amount of the contract: on a contract in excess of $500,000.00, the bond shall be in the amount of $500,000.00. Drawings and specifications may be examined free of charge at the following offices:

State Architect, 270 Broadway, New York City
State Architect, The Gov. A. E. Smith State Office Bldg., Albany, N. Y.
District Engineer, 109 N. Genesee St., Utica, N. Y.
District Engineer, 301 E. Water St., Syracuse, N. Y.
District Engineer, Barge Canal Terminal, Rochester, N. Y.
District Engineer, 65 Court St., Buffalo, N. Y.
District Engineer, 30 West Main St., Hornell, N. Y.
District Engineer, 444 Van Duzee St., Watertown, N. Y.
District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y.
District Engineer, 71 Frederick St., Binghamton, N. Y.
N. Y.
District Engineer, Babylon, Long Island, N. Y.
Willowbrook State School, Staten Island, N. Y.

Drawings and specifications may be obtained by calling at the Bureau of Contracts and Accounts, Department of Public Works, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., or at the State Architect's Office, 18th Floor, 270 Broadway, New York City, and by making a deposit for each set as follows: Construction, $40.00; Heating, $20.00; Sanitary, $15.00; Electric, $10.00; Refrigeration, $5.00; or by mailing such deposit to the Albany address. Checks should be made payable to the State Department of Public Works. Proposal blanks and envelopes will be furnished without charge.

DATED: 11/18/54
MFM/N

U. S. Government

Department of Commerce, Bureau of Public Roads, November 18, 1954. SEALED BIDS will be received at the office of the Division Engineer, Bureau of Public Roads, 1440 Columbia Pike, Arlington, Virginia, until 11:00 a.m., E.S.T., DECEMBER 21, 1954, for Project 1D5-1E1, Colonial Parkway, James City County, Virginia. Length: 1.936 miles. The approximate quantities of the more important items are: 1,680,000 cu. yd. Hydraulic Embankments, 18,000 lin. ft. Untreated Timber Piling, 36,000 sq. ft. Untreated Timber Sheet Piling and 34,000 sq. ft. Treated Timber Sheet Piling. Minimum wage rates have been fixed as required by law. Plans, specifications, and proposal forms are available upon request at the address given above or Bureau of Public Roads, 920 South Jefferson Street, Roanoke, Virginia. H. J. Speiman, Division Engineer.

SEARCHLIGHT SECTION

(Classified Advertising)

EMPLOYMENT: BUSINESS: **"OPPORTUNITIES"** :EQUIPMENT :USED OR RESALE

UNDISPLAYED RATE

$1.80 a Line, minimum 3 lines. To figure advance payment count 5 average words as a line.

Discount of 10% is allowed if full payment is made in advance for 4 consecutive insertions.

POSITION WANTED undisplayed rate is one-half of above rate, payable in advance.

Box Numbers in care of our New York, Chicago and San Francisco Offices count as one additional line.

Replies are forwarded each day as received at each of the offices mentioned without additional charge.

EQUIPMENT WANTED or FOR SALE Advertisements acceptable only in Displayed Style.

DISPLAYED RATE

The advertising rate $30.50 per inch for all advertising appearing on other than a contract basis. Contract rate quoted on request.

An advertising inch is measured ⅞ inch vertically on one col. 3 col.—30 inches to a page. R.N.B.

SEND NEW ADVERTISEMENTS to N. Y. office, 330 W. 42nd St., N. Y. 36, for December 23rd issue, closing December 13th.

YOUNG AGGRESSIVE SALES ENGINEER

With concrete pipe manufacturing background. This is an excellent opportunity for top-notch man possessing engineering experience and sales ability. Must have the technical knowledge to negotiate with consulting engineers and sell them on the use of a proven product. Territory is the South and Southeast. Reply fully, giving age, experience, education and salary requirements, to

P-4737, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

SALES ENGINEER TRAINEES

Men, if you have civil or architectural engineering degrees or equivalent training and experience in building construction, here is a stimulating challenge to utilize this knowledge in a sales capacity. Because we are expanding our MILCOR line of engineered metal products for the building industry, there are additional openings for qualified candidates in our sales training program. Excellent outlook for advancement. Salary open.

INLAND STEEL PRODUCTS COMPANY
4101 West Burnham St.
Milwaukee 1, Wisc.

GENERAL MANAGER

for small, conservative corporation operating throughout the Southeast in the production of concrete pipe and sand and gravel. Must be capable of assuming full responsibility. Reply fully, giving age, experience, education and salary requirements to

P-4738, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

CIVIL ENGINEERS

Junior positions in California's huge highway program. High level professional experience with excellent promotional opportunities offered to recent college graduates in civil engineering. $376 to start with raise after six months. Positions open at this level only. Write Section E, State Personnel Board, 1015 L Street, Sacramento 14, Calif.

NEW BUSINESS ENGINEER

Established engineering-construction management firm has opportunity for Engineer who has successful background in selling services for design of industrial chemical plants, public works, architectural. Write fully giving details of past similar selling.

P-4618, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

CONSTRUCTION SUPT.

For General Contractor

Must be familiar with concrete construction, brickwork, etc. and capable of coordinating subcontractors work. State experience, when available and salary requirements.

P-4223, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

WANTED

STRUCTURAL ENGINEER

With 5-10 years experience in steel and concrete design to work on design of pulp mill construction. Permanent position. Write: H. J. Kutchera, Chief Engineer

RAYONIER INCORPORATED
Hoquiam, Washington

SALES REPRESENTATIVE WANTED

TO RENT & SELL STEEL SHEET PILING IN ME., N.H., VT., MD., N.C., S.C., GA., NO. FLA., VA., ALA., TENN., KY.

R. C. STANHOPE, INC., 60 E. 42nd, N.Y. 17, N.Y.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS VACANT

BRIDGE—HIGHWAY Engineers—Designers—Draftsmen. For work on bridges, expressways and turnpikes. Location Midwest. Permanent positions with periodic promotions depending on experience and ability. Paid vacations, sick leave, hospitalization and life insurance. Include education, experience, reference and salary expected in application letter. P-4280, Engineering News-Record.

CHIEF ENGINEER with substantial process experience in petroleum and chemicals for Chicago based contractor. Furnish qualifications, experience, salary, availability, etc. P-4724, Engineering News-Record.

WANTED: YOUNG engineer to do design and layout work for precast products plant in Central Pa., now entering prestress to keep abreast of present day precast and prestress designs. P-4707, Engineering News-Record.

WANTED STRUCTURAL Engineer — Three years experience in structural steel design and detailing required. Mechanical Engineer—must be experienced in design for all mechanical trades. Experience with Indiana and Ohio codes desirable. Architectural Draftsmen and Detailers—A real opportunity for qualified men with one of the Mid-West's fastest growing designing and engineering firms. Call or write Auferoth & Fanning, Celina, Ohio.

REGISTERED CIVIL Engineer (Michigan) for municipal engineering office. Desire a young man with a general background. Work primarily in street and sewer design. Future bright for capable man. State experience, availability and salary requirements. Write to Civil Service Office, City Hall, Dearborn.

CONCRETE PIPE Plant Superintendent with pressure and prestressed pipe experience capable of operating a large modern concrete pipe plant located in the South. Excellent opportunity for a top level production manager. Write fully, giving age, past experience, education, availability, salary requirements to P-4778, Engineering News-Record.

SELLING OPPORTUNITY OFFERED

SALES TRAINEE—Nationally-known company engaged in the manufacture and distribution of fabricated metal products has opening in New York City office for sales trainee with civil engineering degree. SW-4692, Engineering News-Record.

(Continued on following page)

EMPLOYMENT AGENCIES

WANTED ENGINEERS, Designers, Draftsmen-Structural, Architectural, M. E., C.E., E.E., and Ind., also Teachers and Chemists, Cleveland Engineering Agency, 2132 E. 9, Cleveland.

POSITIONS WANTED

SUPERINTENDENT — 25 YEARS experience, desires steady employment. Thorough knowledge of heavy excavation projects. Work consisting of Road grading, and drainage, superhighways, railroad, earthfill dams, tunnels, mine stripping both coal and iron ore, iron ore mining including crushing, grading, sampling and shipping, and large solid rock excavations. Supervision and maintenance of all types construction equipment, estimating. Available now will go anywhere. A-1 references. PW-4552, Engineering News-Record.

SUPERINTENDENT OR General Foreman — Age 42 — Over 20 years heavy construction experience. Excavation grading, drainage and paving. Know men, methods, equipment & cost. Have following competent foremen. Available December 10th. PW-4575, Engineering News-Record.

OFFICE MANAGER Capable of assuming full responsibility for operation of contractor's office. Fourteen years experience in Government and private contracts. PW-4659, Engineering News-Record.

CONSTRUCTION MANAGER, Superintendent 51 yrs. C. E. Twenty five yrs. experience in charge for contractors. Capable and experienced in the estimating, planning, and all phases construction of dams, power houses, bridges marine and subaqueous works. PW-4628, Engineering News-Record.

ELECTRICAL STAFF Engineer & Draftsman over 10 years industrial experience in power wiring, lighting layouts, automatic control wiring, estimating and supervision of electrical installations. Married, age 33, desires responsible position with future. PW-4740, Engineering News-Record.

CONSTRUCTION EXECUTIVE and Superintendent now in the midwest desires permanent location in the Pacific Northwest with contractor engaged in Industrial, Commercial, Municipal, or heavy construction. All replies answered. Address PW-4743, Engineering News-Record, 520 North Michigan Ave., Chicago, Illinois.

SALESMAN AVAILABLE for N. Y., N. J., Pa. area. Know building materials and equipment and their uses. Have sold to contractors and industrial plants. Wish to locate with materials or equipment manufacturer. PW-4654, Engineering News-Record.

WANTED GROWING contractor seeking an ambitious capable assistant—varied field and office experience B.C.E. Reg N.Y.S. Age 28. PW-4803, Engineering News-Record.

POSITIONS WANTED

CIVIL ENGINEER MSCE 31 8 years design and construction experience. PW-4792, Engineering News-Record.

CHIEF ESTIMATOR, thoroughly experienced all phases construction industry including buying sub contracts, materials, managing field to produce good costs and soliciting new business. PW-4764, Engineering News-Record.

CONSTRUCTION ENGINEER—Graduate C.E. desires position as field or office engineer, U.S.A. or foreign. 25 years experience large building, housing projects and heavy construction. Fluent Spanish. PW-4763, Engineering News-Record.

CONTROLLER — ADMINISTRATIVE Ass't — Business Mgr. 12 yrs. construction experience —executive capacity. Specialist Gov't Contracts —excellent references. Available 30 days, possibly sooner if required. Age under 50 yrs.—health good—will relocate. PW-4787, Engineering News-Record.

CONSTRUCTION EXECUTIVE, available as project manager, on large operation, chief estimator for large organisation or in other executive position where scope warrants employment of top man, thoroughly experienced on all types of construction and in every phase of general contracting. PW-4807, Engineering News-Record.

PART TIME WORK WANTED

ENGINEER—18 YRS. Experience desires Part Time Work designing, drafting or planning. Steel or concrete oil refineries, power and industrial plants, bridges, etc. PTWW-4553, Engineering News-Record.

SELLING OPPORTUNITY WANTED

GRADUATE CIVIL Engineer, 18 years experience now selling to heavy construction field and consulting engineers in Maryland, Dist. of Columbia, Virginia. Wants lines in field of heavy construction on straight commission basis. Through contacts can guarantee quick results in promotion of sales. SW-4761, Engineering News-Record.

FOR A FEW SPECIAL CONSTRUCTION PRODUCT LINES

An Eastern Representative with 25 years of specialized sales experience will establish and handle distributor relations or talk directly with your customers. If you want to build up your sales volume or strengthen your distributor organization along the Eastern seaboard write to

RA-4797, Engineering News-Record
330 W. 42 St., New York 36, N. Y.

It's Here... Contractors, Estimators

New Book
ESTIMATING PRODUCTION AND CONSTRUCTION COSTS
Never Goes Out of Date

Estimate general construction costs. More Accurate. Write for 10 day free exam. $15 postpaid from:

THE DALLAVIA CO.
Dept. E 2110 Elmen, Houston, Texas

ENGINEERS

STRUCTURAL STEEL SALES PROMOTION

To meet requirements of an expanded program several engineers are needed immediately for technical and promotional work with customers of the structural steel fabricating industry. These are permanent positions with a national trade and technical organization.

Positions are in field offices in central and midwestern states. Some travel required. Excellent opportunities for advancement and for showing initiative and judgment.

Applicants should have B.S. in Civil Engineering, preferably with a major in structural. Experience in design and construction in structural steel, and promotional contact with architects, engineers and contractors desirable.

Field engineers—Under 30 years old
District engineers—30-45 years. Salaries open, depending on experience. Insurance and retirement plans available.

Send complete resume, recent photograph if available and salary requirements by mail to:

AMERICAN INSTITUTE OF STEEL CONSTRUCTION
101 Park Avenue, New York 17, New York

LEARN ESTIMATING

Complete Building Estimators Course, also Building Labor Calculator for practicing estimators. Thirty-fourth year serving the building industry. For free trial and all particulars write:

TAMBLYN SYSTEM
1420 Gilpin St. Denver 6, Colorado

WANTED

WANTED TO BUY
4000' 15 or 16" CONCRETE FORMS
WILLIAMS CONSTRUCTION CO.
Box 145 Baltimore 20, Md.

WANTED

Symons 3 ft. standard cone crusher with extra coarse bowl. Also—2 cy. Sauerman slack line cableway excavator 70 ft. mast.

P. O. Box 314, Chester, New York

Wanted to Buy
USED DRIER
For asphalt plant, size 5' x 20'
GENERAL CONSTRUCTION CO.
(Alberta) Ltd.
Lethbridge, Alberta, Canada

Don't forget the

BOX NUMBER

When answering the classified advertisements in this magazine don't forget to put the box number on your envelope. It's our only means of identifying the advertisement you are answering.

Engineers—Foremen—Office Men

Learn latest methods to organize and run work. Prepare for the top jobs.
Send post card for details.
GEO. E. DEATHERAGE & SON CONSTRUCTION CONSULTANTS
411 So. 5th Ave. Lake Worth, Florida

STRUCTURAL ENGINEERING
ARCHITECTURAL ENGINEERING
OUR COURSES of instruction by mail HAVE HELPED THOUSANDS to better positions and to pass State Board Examinations. Forty-third year.
WILSON *Engineering Corp*
Home Study Office: HARVARD SQ. CAMBRIDGE MASS.

SHOVELS — BACKHOES — CRANES

1—Link-Belt Model LS-80, ¾-yard crawler backhoe-clamshell combination with General Motors 4-cylinder diesel engine..... $4800.00
2—Lorain 75-D, 1½-yard crawler crane with 60' boom. Waukesha gas engine. $6500.00
3—Buckeye Clipper ¾-yard crawler backhoe. Gas power. (Lancaster yard)... $3500.00
4—Lorain Model 50-I one-yard crawler clamshell with Owens Bucket. Cat. diesel engine. 80% new..... $18,500.00

Will consider Allis-Chalmers Tractors or Scrapers offered in trade.

FRANTZ EQUIPMENT COMPANY
50th & Wynnefield Avenue Philadelphia 31, Pennsylvania
GRanwood 7-7200

CONCRETE PLANT EQUIPMENT

1—Johnson 150 cubic yard Concrete Plant. 3 aggregate and 1 cement compartment. 2 cubic yard aggregate and cement weight batchers. 520 barrel auxiliary cement bin with truck hopper, elevator and screw conveyor. Outfit has aggregate truck hopper and bucket elevator. Plant includes 2 each of Ransome 28S Mixers.

Subject to prior sale

FRAZIER-DAVIS CONSTRUCTION COMPANY
1319 Macklind Avenue, St. Louis, Mo. STerling 1-1950
Box 188—Grahamsville, New York Grahamsville 2861

"BEST BUYS IN MIDDLE WEST"

★ CAT D8 DOZER
"BONDED BUY"
★ ALLIS-CHALMERS HD 19 DOZER
"BUY & TRY"
★ ALLIS-CHALMERS HD 15 DOZER
"CERTIFIED"
Write or Call (MA 6-1860)
For Your Needs
DEPT. E
PATTEN TRACTOR & EQUIPMENT CO.
620 South 25 Ave., Bellwood, Ill.

TRENCHERS

Cleveland 95 S/N 3195, Model 95 S/N 2661; Buckeye C-15 S/N 3288, Buckeye 160 S/N 3887, Buckeye 410 S/N 4226, Buckeye 401 S/N 43; P&H 1030 S/N 2163; Pioneer Model 170 S/N 6033 dies 1; Longhorn S/N CX-1040; Parsons 25 S/N 1495.
AIR COMPRESSOR RENTAL COMPANY
19615 Nottingham Road, Cleveland 10, Ohio

STOCK SPECIALS

For Sale or Rent

1—P & H Model 255 Crawler Shovel, 2 yd. capacity. Cat Diesel power. Reconditioned. Crane boom available.
1—P & H 655B Crawler Crane, 1½ yd. capacity. Cat. diesel. Late Model. Reconditioned.
1—Osgood 1 yd. Crawler Hoe & Crane, 50' boom. Gas Power. Good Condition.
1—Bay City Model 45 Crawler Shovel, ¾ yd. Cat. Diesel. Late Model. Reconditioned.
1—Bay City Model 42, ¾ yd. Crawler Hoe-Shovel-Grader. Thoroughly reconditioned. Gas Power Cat. Diesel available.
1—Link Belt LS-71 Crawler Crane, ¾ yd. capacity, 45 ft. crane boom. Late model in excellent condition.
1—P & H Model 255 A Crawler Hoe or Shovel, ¾ yd. Cat. Diesel. Late Model in excellent condition.
1—Link-Belt Speeder Model D-4 Crawler Crane, 40 ft. boom. Cat. D-7700 diesel engine. Reconditioned.
1—Northwest Model 3 Crawler Shovel ¾ yd. Gas Power. Good running condition. Boom available.
1—Buckeye Model 70 ¾ yd. Crawler Hoe or Crane. Gas Power. Reconditioned.
1—Bay City Model 30, ½ yd. Crawler Shovel. Gas Power. Late Model fully reconditioned.
1—Bay City Model 25, ½ yd. Crawler mounted hoe or shovel, gas power. Completely rebuilt. Late model.
1—Michigan C-16, ½ yd. Crawler Hoe. Late model, fully rebuilt. Gas power.
1—Koehring Model 205, ½ yd. Crawler Hoe, Gas Power. Late model fully rebuilt.
1—Bay City Model 20, ⅝ yd. Crawler Shovel or Hoe, gas power. Rebuilt.
1—Bay City Tractor Shovel ⅝ yd. Capacity. Hoe, Shovel or Crane. Reconditioned.
1—Lorain Moto Crane Model MC-4 on factory carrier — 11:00 x 20 tires. Gas power. In excellent operating condition.
1—Bay City Model 20, ⅝ yd. Crane on Mack Chassis. 40 ft. Crane Boom.
1—Allis Chalmers HD 14 Tractor with Baker Hydraulic Blade.
1—Caterpillar D-8 Tractor I-H Series DD-PCU.
Clamshell Buckets, ⅜ to 2 cu. yd., also several Crane Booms — Trench Hoes and Shovel Attachments — Assorted makes.
Quickway Model E—Hoe & Shovel attachments.
LeTourneau Model "C" Tournadozer.

Check on what you may require

EUGENE P. READING, INC.
Walnut St. B. & O. R. R.
Roselle, New Jersey
P. O. Box GHestnut 5-0200

SALE

Rental-Purchase
RENT

KOEHRING, 605, 1½ Cu. Yd., 30 ton, Clamshell, dragline, hoe, D-1300A Cat. Diesel, 75 ft. boom, power lowering-suspension step. Retractable A frame, long and wide mountings, excellent condition, new 1952, "A Ditch Digger's Dream," $38,000.00.

JAEGER, 210 Air Compressor, gasoline, 4 pneumatic wheels, excellent condition, bargain, $2,500.00.

WANTED

AIR COMPRESSOR, 250 or 365, diesel power, should be late model with little use.

COLUMBIA CONSTRUCTION CO., INC.
2108 Columbia Ave.—WAlnut 3-1367
Indianapolis, Indiana

FOR RENT OR SALE
MANITOWOC CRANES

Models 2000-B or 3500—25 T. to 60 Ton Capacity—50' to 125' booms—20' or 30' jibs—manual controls — independent booms —torque converters.

McCARRICK BROTHERS
1700 E. Ridge Pike P.O. Box 291
Norristown, Pa. Phone: 8-4231

FOR SALE
LOCOMOTIVES

Diesel electric
25 - 44 - 45 - 65 - 70 tons

Write for Details

FRANK M. JUDGE & CO., INC.
7010 Empire State Building
New York 1, N. Y.

FOR SALE
Caterpillar Pull Grader Model 66

Never used Army surplus. No rust. 12 ft blade needs D8 or equal tractor for power. Has self-powered controls. Perfect machine for bank sloping or pioneer road building. Cost $5000.00, asking $1000.00, FOB Cranford, New Jersey.

EDWARD E. BAHR
32 West Holly St. Cranford, New Jersey

International Bulldozer TD14A

Excellent Condition, 2½ Yrs. Old

DON and LOU EXCAVATORS
85-45 262nd St. Floral Park, New York
Tel: Fieldstone 7-0311

SKIP HOIST UNIT

60 cu. ft. Electric Driven, with 70 ft. Elec. Tower and Cone shaped steel storage bunker. Catenary suspension for truck or car loading. Complete. Located Albany, N. Y.

PHILADELPHIA TRANSFORMER CO.
2829 Cedar St. Phila. 34, Pa.

Caterpillar D7 Cable bulldozer (rebuilt)
Hyster 5 Ton Karry Krane
Ross 7½ ton Forklift
D7N Hyster winch

WINFIELD
47-19 69th St. Woodside 77, N. Y.
Illinois 7-0844

FOR SALE or RENT
With Option to Purchase
Rebuilt—A1 Condition

42B Bucyrus Erie Shovel 2 cy diesel
Model 28 N. W. Shovel ¾ cy diesel
Caterpillar D8 Bulldozer
Shovel Front for Model 28 N.W.
6 wheel Mack Tractor 40 ton Rogers Low Bay

WILLIAMS CONSTRUCTION COMPANY
Box 145 Balto. 20, Md. Murdock 6-6800

50 ton SCREW JACKS—NEW

12 ea. BUDA #5010 Journal Jacks
28 ea. DUFF-NORTON #5027 (27" high—with foot lift; 13½" rise)
2000—Turnbuckles ¾"x12" eye & eye-forged—Chicago Hdwe. $1.10 ea. for the lot
Steam Hose—1000'—150 & 300 lb. pressure. 1" I.D. New—Closeout.

TOOL DESIGN & EQUIP. CO.
225 Lafayette St., N. Y. 12, N. Y.

MONTGOMERY ENGINEERING CO. — **SAVE up to 1/2** ON NEW GOVT. SURPLUS
• SALES
• RENTALS
• TRADES
• TERMS
AIR TOOLS

SNOW PLOWS

2—Baker Heavy Duty 9 ft. blades—Bumper type mounting with monarch 12 v. electric-hydraulic controls — New 2 years ago, never used. Paid $1350.00 for pair will sacrifice for first $800.00.

DANIEL GLERUM & SON
195 Sargeant Avenue Clifton, New Jersey
GRegory 3-0318

SAVE EITHER WAY
with
ECA REBUILT EQUIPMENT
Rent it or BUY IT!

Partial list only

If what you need issn't listed, just contact our nearest plant. We'll gladly quote on your requirements.

CRANES, CRAWLER

Mdl. 304 Koehring, ¾ yd., #C5934, 35-50' boom, w/jib & backhoe, wt. 20 ton.

Mdl. 255A P&H #8243, 30-40' boom, Chrysler gas eng., cap. 8½ ton @ 12'.

Mdl. 501 Koehring #1071, 1¼ yd., Mdl. K Wisc. gas. eng., 60-80' boom, 18' jib cap., 20 ton @ 12'.

Mdl. 77 Lorain, 1½ yd., Diesel Crawler Crane, Ser. 9163, 45-85' boom, 20' jib. wt. 40 ton.

Mdl. 78 Lorain, 1½ yd. Diesel Crane, up to 100' boom, 15' jib, w/fairleads for drag work, hi gantry. Contact Chicago plant for new low price.

655-A P&H, 1½ yd., Diesel Crane, Ser. 6246, Cat. D-13000 eng., hi gantry, 80' boom.

CRANES, LOCOMOTIVE

30 ton Mdl. F OHIO #3266, 50' boom, oil fired, 200# boiler, beautiful shape.

DERRICKS, GUY & STIFFLEG

20 ton American Terry Steel Erectors Guy Derrick, 110' mast, 100' boom.

25 ton Wiley Mdl. E Steel Stiffleg, cap. 25 ton with 60' boom.

30 ton Wiley Mdl. F Stiffleg, 60, 80 or 100' boom; rated with 60' boom 30 ton @ 38' or 15 ton @ 57'.

PUMPS

8" Mdl. 125 Gorman Rupp, 6 cyl. Hercules gas eng, 2300 TPM @ 20' to 600 GPM @ 110'. Self-priming, 4 steel wheels.

Hundreds of pumps available for rent or sale.

AIR COMPRESSORS, PORTABLE, DIESEL

NEW Chgo. Pneumatic 315 cu. ft. Diesel Air Compressor, 4 spring suspended pneu. tires, sacrifice at $6,900 f.o.b. Chicago.

100 Compressors, electric, Diesel and gasoline, ranging from 60 to 600 cu. ft., for rent or sale.

THIS MONTH'S SPECIALS

HOISTS

9½x12 Lambert 2/drum steam, modern heavy duty frictions, 6 ton @ 175 FPM. Sacrifice.

80 HP Lambert 3/drum, 3/60/220/440, 9,000# @ 225 FPM.

80 HP Mundy 1/drum, gasoline, 9,000# @ 225 FPM. Silent chain drive.

100 HP American 2/drum, gasoline, 3 ton @ 270 FPM. With or w/o swingers.

Lidgerwood 3/drum, attached swinger, 8,000# @ 215 FPM. With or without power.

11x12 3/drum American, steam, 15,000# single line pull.

1, 2, 3/drum hoists, all sizes and makes, gas, electric, steam and Diesel powered.

BOILERS

125 HP Erie City 100#, 1250 sq. ft., horiz.
125 HP Penn. loco. type, 125#.
115 HP Marion loco. type, 150#.
50 HP International vertical type, 150#, 54"x95½".

CLIFTON HEIGHTS, PA.
Box J-608, Sub. of Phila.
MAdison 6-2200

CHICAGO 12, ILL.
1155 S. Washtenaw Ave.
NEvada 8-2400

ECA
EQUIPMENT CORPORATION OF AMERICA

PITTSBURGH 30, PA.
Box J-833
FEderal 1-2000

NEW YORK 7, N. Y.
30-J Church St.
WOrth 2-0936

SEA MULES FOR SALE
(Located West Coast)

All steel twin screw tug boats. 38'x13'x6'. Powered by two 142 HP Chrysler engines. 9 to 1 reduction gear.

New, still in the original crates. $6500 each.

MISSISSIPPI VALLEY EQUIPMENT CO.
511 Locust St. St. Louis 1, Mo.

DIRTMOVERS SPECIAL

2—**Allis Chalmers Model TS-200 Motor Scrapers** in very excellent condition, slightly used but priced at a great saving to you.

1—**Allis Chalmers Model TS-300 Motor Scraper** used one month, available at considerable saving to contractor.

Call
Linden 4-5600, Extension 7, Bellwood, Ill.

Service to the Marine Industry on The Great Lakes

B & V EQUIPMENT COMPANY, Inc.
Rentals on Barges, Tugs & Scows
39 West Main St. Williamson, N. Y.
Phone 7131

COMPRESSOR: Ingersoll Rand PRE-2, cap. 1000 CFM @ 100 lbs., 2300 volt, complete.

BLAST HOLE DRILLS:
Bucyrus Erie 42-T diesel, 9" bit and tools; also, electric.

SHOVELS AND DRAGLINES:
Bucyrus Erie 100-B, 3 yd., rock dipper
Bucyrus Erie 120-B, 4 yd., rock dipper
Bucyrus Erie 170-B, 6-½ yd., rock dipper
3 phase, 60 cycle, 2200/4000 volt.
Northwest 78-B, 2 yd. capacity, Murphy diesel motor, rebuilt.

TRANSITE PIPE: 7000 ft. 10" and 14", Class 100, 150 and 200. (NEW).

OVERHEAD ELECTRIC CRANE: Shepard Niles 8 ton, 54' span, 4 motor, clam shell bucket operating, 440 volt, 3 phase, 60 cycle, 1—2 5 ton, 60' span, 3 motor, 440 volt.

LOCOMOTIVE CRANE: Link Belt 25 ton capacity, standard gauge, gasoline powered, cast steel trucks, air brakes, with or without 1-¼ yd. Williams clam shell bucket, thoroughly modern, excellent condition. Located Minnesota. For sale or rent.

LOCOMOTIVES: 2—65 ton diesel electric, standard gauge, thoroughly modern, excellent condition. For sale or rent.

MINE HOISTS: Single and double drum, 100 to 1500 H.P. with all electrical equipment. Complete specifications, drawings and photos available.

HOIST MOTORS:
300 H.P., 435 RPM. 600 H.P., 710 RPM.
400 H.P., 588 RPM. 1200 H.P., 444 RPM.
2200 volt, A.C., with controls.

SINK FLOAT PLANT: Mobil two-unit with two 7 ft. dia. HMS Separating Cones with screens, pumps, magnetic separators, densifiers, demagnetizing coils, pump, piping, valves, framework, etc. with all control equipment.

ROLL CRUSHERS: Single roll 30" x 48" and 36" x 60", heavy duty.

JAW CRUSHER SPECIALS: Allis Chalmers 42" x 40", 48" x 36" and 36" x 24"; with motors and drive. Rebuilt.

WE BUY AND SELL EQUIPMENT THROUGHOUT NORTH AND CENTRAL AMERICA

A. J. O'NEILL
Lansdowne, Pa.
Phila. Phones: MAdison 3-8300—3-8301

Need Air?
CALL
AMERICAN AIR of JERSEY
AIR FOR SALE or RENT SINCE 1902
GAS • DIESEL • STEAM • ELECTRIC
NEW AND QUALITY REBUILTS

STATIONARY

60 CFM	6x5 Worthington HB—10 HP Elec
122 CFM	7x7 Worthington HB—20 HP Elec
170 CFM	6¼x4½ Davey VBS—25 HP Elec
242 CFM	125 PSI 8x7 Joy WG-9—40 HP Elec
270 CFM	WL-60 Joy Gas and Elec 50 HP
294 CFM	125 PSI 10x11 Worthington HB
364 CFM	20 PSI 12x7 Gardner Denver RX
368 CFM	100 PSI 12x10 IR-ER-1
852 CFM	125 PSI 13/8x10 Ingersoll Duplex
931 CFM	85 PSI 17x13 Chicago T-B
1085 CFM	35 PSI 20x12 Pennsylvania

MANY OTHERS TO CHOOSE FROM
AFTERCOOLERS • AIR RECEIVERS

PORTABLE

55 CFM	Lindsay (Gas)
60 CFM	LeRoy-Worth (Gas)
105 CFM	Joy-Worth-CPT (Gas)
160 CFM	Worthington (Gas)
210 CFM	Worthington (Gas & Diesel)
270 CFM	Joy w/Buda Power Unit-Skids
315 CFM	Worthington (Gas & Diesel)
500 CFM	Worthington (Diesel)
600 CFM	Worthington (Diesel)

VACUUM PUMPS

180 CFM	10x4 Ingersoll—10 HP
354 CFM	14x5 Penn—15 HP
434 CFM	14x7 Ingersoll—15-20 HP
800 CFM	18x9 Worthington—30 HP
1635 CFM	24x11 Chicago—60 HP
5881 CFM	30 & 30x12 Ingersoll XVH

American
AIR COMPRESSOR CORP.
DELL AVE. & 48th ST., NORTH BERGEN, N. J.
Telephone UNion 5-4848

FOR SALE

New and Used material—Immediate delivery from stock Angles, Channels, I and WF Beams, especially for Contractors needs

H BEAMS PILE SECTIONS

50 pcs	10" B P S	42#	48/60'
46 "	10" B P S	57#	40/67'6"
69 "	12" B P S	53#	60'
63 "	14" B P S	73#	60/75'

Phone or Wire your steel requirements

We are also interested in purchasing your surplus material.

We assure you our prices will be the best obtainable.

HY DRACHMAN STEEL CORP.

Warehouse 1423 34th Avenue, Astoria, New York AStoria 8-4484 8-8023

Sales Office 563 East Tremont Ave., New York City, N. Y. CYpress 9-3440

FOR SALE

BARGAIN

1½ Cubic Yard Blaw-Knox R46, Bottom Dump Concrete Buckets.

$250.00 each

Subject to prior sale

FRAZIER-DAVIS CONSTRUCTION CO.
1319 Macklind Ave., St. Louis, Mo. ST. 1-1950
Box 188, Grahamsville, New York..... 2861

PILING

SURPLUS NEW and USED For Sale or Rent

LOW COST INSTALLATION AND OPERATION

CABLEWAYS

IMMEDIATE SHIPMENT

ELECTRIC, STEAM or DIESEL CAPACITY 5 to 20 TONS SELL, RENT or BUY

FOR DAMS BRIDGES BREAKWATERS FILTRATION AND SEWERAGE PLANTS

FOR SPEED ECONOMY EFFICIENCY FLOOD SAFETY LABOR REDUCTION

AMBURSEN DAM CO. INC. 295 MADISON AVE NEW YORK

We do a Nation-Wide business in

STEEL SHEET PILING

IMMEDIATE SHIPMENT

685 pcs. 68-38 ft. Carn. MP-101—West Coast
396 pcs. 60-50 ft. M-116 & M-115—Illinois
400 pcs. 60-30 ft. Beth. DP-2—New York
504 pcs. 60 ft. M115, M112, M116—Kansas City
80 pcs. 50 & 40 ft. Carn. M-112—N. Dakota
196 pcs. 60 ft. Beth DP-2—Alabama
130 pcs. 30 ft. Carn M-115, Ohio.

Other Lengths & Sections at Various Locations

PILE DRIVING EQUIPMENT

Vulcan and McKiernan-Terry Steam Pile Hammers and Extractors Hoists and Boilers

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., Chestnut 1-4474, St. Louis, Mo.

STEEL SHEET PILING

600—Pcs. M-116 in 40 to 60'—Chicago
130—Pcs. M-115 in 50 to 60'—Chicago
140—Pcs. M-112 in 60' —Chicago
300—Pcs. M-116 in 50 to 60'—Kansas City
100—Pcs. M-115 in 50' —Kansas City
105—Pcs. M-112 in 60' —Kansas City
83—Pcs. M-112 in 25 to 50'—North Dakota
100—Pcs. I-23 in 12 to 16'—Illinois
86—Pcs. M-116 in 29 to 30'—Southern Illinois
49—Pcs. I-22 in 30' —Wisconsin

Available for Prompt Shipment
Other Lots at Various Locations

CONTRACTORS MACHINERY CO.
Phone VAlentine 4740 2637 SOUTHWEST BLVD KANSAS CITY 8, MO

FOR SALE OR RENT

One (1) complete set Twindrills equipped with Schramm 4" Drifters.

Two (2) Joy Model D J B Drill Jibs with 4" Feeds and Drifters.

One (1) Army half track with mountings for 600 Cu. Ft. Air Compressor and Drills.

All equipment except Halftrack new and used only four months.

We sell half price or rent, subject to prior sale.

McDONOUGH CONSTRUCTION COMPANY OF GEORGIA
7 Baltimore Place, N. W.
Atlanta, Georgia
Telephone: ELGIN 4861 or ATWOOD 9864

RENT STEEL SHEET PILING

Get the exact lengths and sections you need from Foster—all standard makes, delivered *on time*—and at Foster's standard low rental rates. Also Rental Pile Hammers & Extractors.

L.B. FOSTER co.
PITTSBURGH 30 • NEW YORK 7 • CHICAGO 4
HOUSTON 2 • LOS ANGELES 5

GREENHEART

Piling Timber and Lumber

Specified for heavy-duty marine Construction by U. S. Navy, Corps of Engineers, Coast Guard.

GREENHEART (Demerara) Inc.
52 Vanderbilt Ave., New York MU 6-0410

FOR SALE

Carn. MP112 new Steel Sheet Piling

550 pcs. 46 ft. and 600 pcs. 45 ft.

Can ship immediately—in carload lots.

FS-4874, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

FOR SALE

STEEL SHEET PILING

AT CHIEF JOSEPH, WASHINGTON

Shipped New—Used Only One Job

CARNEGIE Length	MP-101 Pcs.	MP-102 Pcs.	TEES Pcs.
72-65 ft.	105	100	2
65-60 ft.	210	80	9
60-50 ft.	210	5	18
50-45 ft.	290	2	7
45-40 ft.	120	1	13

Also quantity shorter than 40 ft.—Quick shipment regardless of job location, write, wire or phone.

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., CHestnut 4474, St. Louis 1, Mo.

FOR SALE

10" H-beam 42# Piling 6 pieces 55'-0"

GEO. SHEAF & COMPANY
449 Neilston St., Columbus, Ohio
CApitol 8-4337

When you need PILING . . . fast

use this section, as many contractors do, as a piling buying directory. It can save you time when you want to know, quickly, where to buy good new or used piling.

RAILS-TIES

TRACK ACCESSORIES

NEW and RELAYING

NEW—RAILS—Relayers

All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK

480 Lexington Ave., New York, N. Y. Reno, Nevada
Park Bldg. Pittsburgh, Pa. Carnegie, Pa.

RAILROAD Cross and Switch TIES

Promptly from adequate stocks

NEW and USED *(as available)*

GILLIS & COMPANY

29 East Madison St. Chicago 2

RAILS

NEW — RELAYING — TRACK ACCESSORIES

MIDWEST STEEL CORP.

502 DRYDEN STREET

CHARLESTON, W. VA.

IMMEDIATE DELIVERY

PILE DRIVING EQUIPMENT

Vulcan and McKiernan-Terry
Steam Pile Hammers and Extractors
Drop Hammers - Driving Caps
Steel Leads - Pile Driver Hose
Hoists and Boilers

CONTRACTORS MACHINERY CO.
Phone: VAlentine 4740
2637 SOUTHWEST BLVD.
KANSAS CITY 8, MO.

Plymouth 35 ton gas locomotive, std. gauge.
Other locos., 7 to 100 tons, diesel, gas (15).
B.-Monighan Walking draglines, 8W-7W-5W-200W.
Page 10-yd. diesel Walking dragline, 150' bm.
Shovels, draglines, cranes, 1/2 to 10 yds. (15).
Whirley portal gantry cranes, 30-60 tons (4).
Dredges, diesel, elec., steam, 20", 16", 14", 12".
Bucyrus 2-1/3 yd. shovel att. only, 52B-55B.
H. Y. SMITH CO.
828 N. Broadway — Milwaukee 2, Wis.

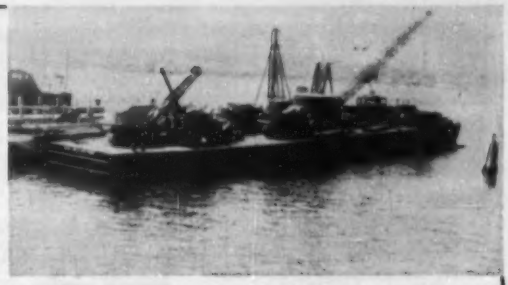

Contractors:

for efficiency and economy . . . let us move your equipment or construction materials direct to job site

Consult us without obligation regarding requirements for any job, large or small. 60 years' experience and a variety of modern workboats, tugs, scows, etc., are at your service.

HUGHES BROS. Inc.
17 Battery Place,
New York 4, N. Y.
Tel. WHitehall 4-1048

Clearing House for Marine Difficulties Since 1894

EQUIPMENT FOR SALE AT ATTRACTIVE PRICES

All in excellent condition

Two (2) Northwest Model 25 Crane/Draglines
One (1) P&H Model 255 Crane/Dragline
One (1) Northwest Model 95 Dragline with Murphy Diesel Engine, 75-foot Boom, Serial #12717.
One (1) P&H Model 955 A. L. C. Dragline, with Waukesha Diesel Engine, 70-foot Boom, Serial #14579.
Nine (9) Euclid 22-ton, End Dump Trucks, powered with Cummins 275 horsepower Diesel Engine.
Three (3) Gar Wood Model 625 25-yard Scrapers.
Five (5) Euclid Single Engine Scrapers.
A-C HD-20 Tractors with Dozers and Push Plates.
CAT D-4, CAT D-6, CAT D-7, CAT D-8 Tractors.

Contact us for complete details.
OFFERED subject to PRIOR SALE

FEHRS TRACTOR & EQUIPMENT CO.
1809-11 Cumming Street,
Omaha, Nebraska
Telephone—Atlantic 3127

DEPENDABLE USED MACHINES

Special:—Link Belt LS-75 crane with generator and controls for magnet work. Come see it!

Bay City 1/2 yd. hoe	Pioneer port. Diesel gravel plant	5x12 Mesabi screen
Byers 1/2 yd. shovel	Lorain 3/4 yd. dragline; 30" shoes	4x16 Mesabi screen
Insley 1/2 yd. dragline	Koehring 503 crane; Caterpillar power	16x16 roll crusher
Lorain 1/2 yd. dragline	Link Belt LS-85 crane; Cat. power	Lessman loader
Bay City 3/4 yd. dragline	40' bucket elevator; 12" buckets	1.5 KW light plant

For rent,—Cranes, truck cranes, buckets, frost balls, floats and other accessories.

10002 Southwest Highway **TRACTOR & EQUIPMENT CO.** Oak Lawn, Ill.

PIPE

SURPLUS NEW and USED FOR SALE

Pipe Sizes 1/8" to 72" OD

CUTTING-THREADING-FLANGING-WELDING
BEVELING-BENDING-COILING-LINING
TO ALL STANDARD SPECIFICATIONS

PIPE, VALVES & FITTINGS
pipe piling • culverts • valves
specialists in prefabricating pipe

ap

"one call gets them all"
fittings • FLANGES • WELDING • IRON-STEEL
SPEEDLAY pipe systems

ALBERT PIPE SUPPLY CO., INC., Berry at North 13 Sts., B'klyn, N. Y.

CRANES FOR RENT

CRAWLERS — Capacities to 60 tons, Booms to 180 ft.
TRUCK CRANES — Capacities to 35 tons, Booms to 130 ft.

P and H, Lima and Manitowoc.
Top-Condition erection cranes

ROGER SHERMAN TRANSFER COMPANY
East Hartford, Connecticut JAckson 8-4106

FOR SALE—IMMEDIATE DELIVERY

C.I. Water Pipe and Fittings-AWWA-Std.

We specialize in Hard to Get—C.I. Pipe and Fittings—such as the following
SL—60" B&S Pipe 12' L. Class D.
2,000 Ft.—30" Pipe—Class B. 12' L.
Pitcast—Reconditioned.
3—60", 24—18", 12—20", 12—24".
Solid Sleeves, all 24" Long Class D.
1—24" True "Y" Branch
Flanged F & D. 125 lbs. also "Y" Branches 5" to 30" B&S Type 2
B&S 45 deg. Bends, 20" to 36" Dia.
1,200—6"—45 deg Bends, 300—8"—90 deg. Bends B&S. Class D.
Also C.I. B&S Pipe 3" to 36"—C.I. Flange Pipe 3" to 24" Dia. Complete line of C.I. Fittings always in stock. B&S and Flanged

TAGCO, INC.
111 Front St., Hempstead, L. I., New York
Telephone—Hempstead 2-5535—6857

PIPE

15,000 feet 6" steel pipe
10,000 feet 4" steel pipe

Both equipped with roller grip couplings suitable for air or water.

Subject to prior sale

FRAZIER - DAVIS CONSTRUCTION CO.
1319 Macklind Avenue, St. Louis, Mo.
STerling 1-1950
Box 188 Grahamsville, New York
Grahamsville 2861

For Sale—Reasonable

TD 9 Int. Bucyrus-Erie A/Dozer, wide gauge
3/4 yd. LS 71 Link-Belt Shovel, Cat. Diesel, 40 ft. crane attach't, 1/2 yd. dragline bucket & fairleads, counterwts.

CONRAD J. ENGELKE, Stamford, New York
Allis-Chalmers Sales & Service Phone 6231

GLOBE PIPE & FITTING CO.
VALVES FITTINGS NEW **PIPE** USED FOR ALL PURPOSES
785 Metropolitan Ave., Brooklyn 11, N. Y.
EVergreen 7-6220

EST. 1904

DAVIDSON PIPE COMPANY INC.
One Of The Largest Stocks In The East
Seamless and Welded 1/8" to 36" O.D. All wall thickness Manufactured. Specialty large sizes. Cutting — Threading — Flanging — Fittings — Valves.
Call GEdney 9-6300
80th St. & 2nd Ave., B'klyn 32, N. Y.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on following pages

NEW ENGLAND

Engineering Services Inc.

Foundation Investigations,
Soil Testing & Test Borings
Minerals Exploratory
Service

110 New London Trnk. Glastonbury, Conn.

Goodind & O'Dea

Consulting Engineers

Design and Supervision

Foundations, Structures, Highways
1214 Dixwell Ave. Hamden, Conn.
125 Church St. Malverne, N. Y.
313 Hoover Ave. Bloomfield, N. J.

Fay, Spofford & Thorndike

Engineers

John Ayer — Ralph W. Horne
Bion A. Bowman — William L. Hyland
Carroll A. Farwell — Frank L. Lincoln
Howard J. Williams
Members, American Society of Civil Engineers

Airports, Bridges, Turnpikes
Water Supply, Sewerage and Drainage
Port and Terminal Works
Industrial Buildings

Designs — Investigations
Supervision of Construction
Boston — New York

Jackson & Moreland

Engineers and Consultants

Design and Supervision of Construction
Reports—Examinations—Appraisals
Machine Design—Technical Publications
Boston — New York

Chas. T. Main, Inc.

Engineers

Design and Supervision of
Construction for Industrial Plants
Electrical, Steam and
Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
80 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS

Investigations — Reports — Design
Supervision of Construction
and Operation
Management — Valuation — Laboratory

1300 Statler Building, Boston 16

C. W. Riva Co.

Engineers

Edgar P. Snow — Robert C. Barker
John F. Westman — John H. Grasso

Highways, Bridges, Tunnels, Airports,
Foundations, Sewerage, Water Supply.

511 Westminster St., Providence 3, R.I.

MIDDLE ATLANTIC

Airways Engineering Corp.

Airports, highways, dams, fuel storage,
pipe lines, aerial topographic mapping.
1212 - 18th St., N.W.,
Washington 6, D. C.
Phone: REpublic 7-8131.

Alster & Associates, Inc.

Photogrammetric Engineers

Topographic Mapping, Planning, Surveying. Map Consultants, Photo Mosaics.
6135 Kansas Ave., N. E.
Washington 11, D. C.
Phone: Taylor 9-1167

Oscar Sutermeister

Consultant on Defense Planning

Reduction of Vulnerability to Atomic and Hydrogen Bomb Attack—Industrial and Urban Dispersion—Protective Construction—Underground Relocation

5923 Johnson Ave. Bethesda 14, Md.

Whitman, Requardt & Associates

Engineers—Consultants

Civil—Sanitary—Structural
Mechanical—Electrical

Reports, Plans, Supervision, Appraisals
1304 St. Paul St., Baltimore 2, Md.

Edwards, Kelcey & Beck

Reports, Design Supervision, Expressways, Port & Harbor Works, Terminals, Tunnels, Bridges, Water Supply, Industrial Plants, Traffic and Management Studies.

3 William Street — Newark 2, N. J.
New York — Boston — Philadelphia

Porter, Urquhart & Beavin

O. J. Porter & Co.
Consulting Engineers
Airports-Highways-Dams-Structures
Foundations-Stabilization-Pavements
415 Prelinghuysen Ave., Newark 5, N.J.
76 Ninth Ave., New York 11, N. Y.
3563 West Third St., Los Angeles 5, Calif.
516 Ninth St., Sacramento 14, Calif.

Greer & McClelland

Consulting Foundation Engineers

SOIL INVESTIGATIONS

Borings
Laboratory Tests
Foundation Designs & Analyses
Reports

99 Greenwood Ave. — Montclair, N. J.
2040 N. Main St. — Houston, Texas

Boswell Engineering Company

Engineers — Surveyors

Topographic, Highway and Property Surveys, Tax Maps, Design, Supervision, Highways, Industrial Buildings, Sewers, Garbage Disposal Municipal Improvements, Airports
Ridgefield Park, New Jersey
Phone Diamond 3-6343

Frank E. Harley and Associates

Consulting Engineers

Design, Surveys, Plans and Construction Highways, Sewerage and Sewage Treatment, Water Supply and Purification, Municipal Problems.
Harley Bldg., 360 Godwin, Wyckoff, N. J.

B. K. Hough

Consulting Engineer
Soils & Foundation Engineering

Site investigations, soil testing, design analysis for earthworks, foundations and pavements, field inspection, engineering reports, consultation.
121 E. Seneca St., Ithaca, New York

Ammann & Whitney

Consulting Engineers

Design — Construction Supervision
Bridges, Highways, Expressways,
Buildings, Special Structures,
Airport Facilities
76 Ninth Avenue, New York 11, N. Y.
724 E Mason Street, Milwaukee 2, Wis.

Barker & Wheeler

Water Supply — Utility and Industrial
Sewerage — Valuations
Sewage Disposal — Reports
Power Systems

New York City, 11 Park Place
Albany, N. Y. 30 State St.

Bogert and Childs

Consulting Engineers

Clinton L. Bogert — Fred S. Childs
Ivan L. Bogert — Donald M. Ditmars
Robert A. Lincoln — Charles A. Manganaro
William Martin

Water & Sewage Works — Refuse Disposal
Drainage — Flood Control
Highways & Bridges — Airfields

624 Madison Avenue, New York 22, N.Y.

Bowe, Albertson & Associates

Engineers

Water and Sewage Works—Industrial Wastes—Refuse Disposal—Municipal Projects—Airfields—Industrial Buildings—Reports—Designs—Estimates—Valuations—Laboratory Service.

110 William St., New York 7, N. Y.

Brown & Blauvelt

CONSULTING ENGINEERS

Expressways, Highways, Parkways
Airports, Bridges, Dams, Water Supply

Industrial and Chemical Plants
Sewage Disposal

Preliminary Reports, Engineering
Design, Construction Supervision

489 Fourth Ave., New York 16, N. Y.

Buck, Seifert & Jost

Consulting Engineers
(Formerly Nicholas S. Hill Associates)

Water Supply — Sewage — Hydraulic Developments, Reports and Valuations. Chemical and Biological Laboratories.
New York City, 113 E. 19th St.

Cotton, Pierce, Streander, Inc.

Associated Engineering Consultants

Water Supply, Treatment, Distribution
Sewage, Sewage Treatment
Refuse Disposal, Trade Wastes
Power Plants
Reports, Plans, Supervision

123 Nassau St., New York, N. Y.
PO Box 198, Hyde Park 36, Mass.
1405 W. Erie Ave., Phila. 40, Pa.
55 Caroline Rd., Gowanda, N. Y.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS

Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering

Two Rector Street — New York
360 N. LaSalle Street — Chic. 4, Ill.
1625 I Street, N.W. — Wash. 6, D. C.

Hardesty & Hanover

Consulting Engineers

Bridges
Long Spans of All Types
Movable—Lift, Bascule and Swing
Hanover Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Expressways and Thruways
Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

F. H. Dechant, E. J. Quirin,
E. H. Harlow

Harbors, Piers & Bulkheads, Drydocks.
Foundations, Soil Mechanics.
Sanitary & Industrial Waste Disposal.
Water Supply, Flood Control.
Airports, Highways, Bridges.
Power, Industrial Plants, Buildings.

27 William Street — New York
9 William Street — Newark
Fidelity Phila. Trust Bldg. — Philadelphia

Hazen & Sawyer

Engineers

Richard Hazen — Alfred W. Sawyer
Water and Sewage Works,
Industrial Waste Disposal,
Drainage
Reports, Design, Supervision
of Construction and Operation

110 East 42nd St., New York 17, N. Y.

Howard, Needles, Tammen & Bergendoff

Consulting Engineers
Bridges and Structures

New York, N. Y., 55 Liberty St.
Kansas City, Mo., 1805 Grand Ave.

Knappen-Tippetts-Abbett-McCarthy

Engineers

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

Moran, Proctor Mueser & Rutledge

Consulting Engineers

Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures; Soil Studies and Tests; Reports, design and supervision.

New York 17, N. Y. 420 Lexington Ave.

PARDO, PROCTOR, FREEMAN & MUESER
Ap. Correo 614 — Caracas, Venezuela

Parsons, Brinckerhoff Hall & Macdonald

ENGINEERS

Bridges, Highways, Tunnels, Airports, Subways, Harbor Works, Dams, Canals, Traffic, Parking and Transportation Reports, Power, Industrial Buildings, Housing, Sewerage and Water Supply.

51 Broadway, New York 6, N. Y.

E. Lionel Pavlo

Consulting Engineer

Design, Supervision, Reports
Bridges, Highways, Expressways
Marine Structures, Public Works
Industrial Construction, Airports

7 E. 47th St. — New York 17, N. Y.

Malcolm Pirnie Engineers

Civil & Sanitary Engineers

Malcolm Pirnie — Ernest W. Whitlock
Robert D. Mitchell — Carl A. Arenander
Malcolm Pirnie, Jr.

Investigations, Reports, Plans
Supervision of Construction
and Operations.

Appraisals and Rates

25 W. 43rd St., New York 36, N. Y.

The Pitometer Associates

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Water Measurements & Special
Hydraulic Investigations

New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Waste, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts Assoc.

Weston Garett-Stanley N. Williams
Consulting Sanitary Engineers

Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals

30 Church Street, New York 7

Preload Engineers Inc.

Founded - 1934

Consultants in Prestressed Design

Designers of more than 800 prestressed concrete bridges, buildings, tanks and high pressure pipe lines erected in North America since 1934.

Carson Dalell — *Cedric Steiner*
Morris Schupack — *R. H. Thwaits*

2333 Connecticut Ave., N.W.,
Washington 8, D. C.

Sanderson & Porter

Engineers and Constructors

Reports and Surveys

New York, New York

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names — Additional cards on preceding and following pages

Seelye Stevenson Value & Knecht
Consulting Engineers

Richard E. Dougherty, Consultant

Airports, Highways, Bridges, Dams, Water Supply, Sanitation, Railroads, Piers, Industrial Plants, Reinforced Concrete, Steel, Industrial Waste Disposal, Foundations, Soil Studies, Real Estate Development

Civil — Mechanical — Electrical

101 Park Avenue New York 17, N. Y.

Scheidenhelm, F. W.
Consulting Engineer

Hydraulic Engineering; Hydro-electric Development; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Law; Appraisals. 50 Church Street, New York 7, N. Y.

Severud-Elstad-Krueger
Consulting Engineers

Structural Design - Supervision
Reports - Buildings - Airports
Special Structures

415 Lexington Avenue
New York 17, N. Y.

Singstad & Baillie
Consulting Engineers

Ole Singstad David G. Baillie, Jr.

Tunnels, Subways, Highways
Foundations, Parking Garages

24 State St. New York 4, N. Y.

Frederick Snare Corporation
Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.
Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela,
San Juan, Puerto Rico, Guayaquil, Ecuador.

D. B. Steinman
Consulting Engineer

BRIDGES

Design, Construction
Strengthening, Investigations,
Reports, Advisory Service

117 Liberty St., New York 6, N. Y.

Henry W. Taylor
Consulting Engineer

Water Supply, Sewerage
Refuse Disposal, Incineration
Industrial Developments

151 W. Merrick Rd, Freeport, N.Y.

The J. G. White Engineering Corporation

Design - Construction
Reports—Appraisals

80 Broad Street, New York

Keis & Holroyd
Consulting Engineers

Formerly Solomon & Keis
since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings.

Troy, N. Y. Ft. Lauderdale, Fla.

Capitol Engineering Corporation
Engineers—Constructors—Management

Bridges — Dams
Planning — Airports
Sewage Systems — Water Works
Design and Surveys — Roads & Streets
Executive Offices: Dillsburg, Penna.

Modjeski and Masters
Consulting Engineers

Design, Supervision, Reports, Inspection and Investigations, of Bridges, Structures, and Foundations.

State Street Bldg. 32rd and Arch Sts.
Harrisburg, Pa. Philadelphia 4, Pa.

Gannett Fleming Corddry & Carpenter, Inc.
ENGINEERS

Dams, Water Works, Sewage, Industrial Wastes & Garbage Disposal, Highways, Bridges & Airports, Traffic & Parking -Appraisals, Investigations & Reports.

Harrisburg, Penna.

Branch Offices
Pittsburgh, Pa. Philadelphia, Pa.
Daytona Beach, Fla., Pleasantville, N. J.

Aero Service Corporation
Photogrammetric Engineers

Aerial Topographic Maps
Precise Photo Mosaics
Plastic Relief Models

226 E. Courtland St.
Philadelphia 20, Pa.

Albright & Friel, Inc.
Consulting Engineers

Water, Sewage and Industrial Wastes Problems, Airfields, Refuse Incinerators, Dams, Power Plants, Flood Control, Industrial Buildings, City Planning, Reports, Appraisals and Rates. Laboratory.

121 So. Broad St., Philadelphia 7, Pa.

Day & Zimmermann, Inc.
Engineers

Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials

New York Philadelphia Chicago

Frederick H. Dechant
Consulting Engineer

Chairman of the Board
Frederic R. Harris Inc.
Water Works, Industrial Wastes, Sewerage, Recovery Processes, Hydraulic Works, Gas Plants.
Philadelphia: Fidelity Phila. Trust Bldg. New York: 37 William St.

Fridy - Gauker - Truscott & Fridy
Architects & Engineers

Water Sewerage - Industrial Waste
Incineration - Power & Distribution
Airport - Building - Town Planning
1321 Arch Street - Philadelphia 7, Pa.

Yule, Sticklen, Jordan & McNee
ENGINEERS

(Formerly General Industries Engineering Company)
Bridges, Highways, Airports
Design, Investigations, Reports
Supervision of Construction
Civil, Structural, Mechanical & Electrical

309 South Broad St. 23rd & Market Sts.
Philadelphia 7, Pa. Camp Hill, Pa.

Hunting, Larsen & Dunnells,
Engineers

Industrial Plants—Warehouses, Office and Commercial Buildings, Steel and Reinforced Concrete. Design and Supervision. Reports.

1150 Century Bldg., Pittsburgh, Pa.

Morris Knowles Inc.
Engineers

Water Supply and Purification Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.

Pittsburgh, Pa.

Peter F. Loftus Corporation
Engineering and Architectural Consultants and Designers

First National Bank Bldg.,
Pittsburgh 22, Pennsylvania

Cable Address—
"LOFTUS Pittsburgh"

Gilbert Associates, Inc.
Engineers • Consultants • Constructors

607 Washington St., Reading, Pa.

Engineering • Construction Supervision
Sanitary • Power • Water • Sewerage
Industrial Relations • Rate-Research

New York • Philadelphia • Washington

Michael Baker, Jr., Inc.
Consulting Engineers

Civil Engineers, Planners, Surveyors; Airports, Highways, Water & Sewerage Design; Aerial Topographic Maps; Dams; Irrigation; Reports; All types surveys. Home Office: Rochester, Pa.; Branch Offices: Jackson, Miss., Harrisburg, Pa.

Weigle Engineering Co.
CIVIL ENGINEERS

William E. Weigle Donald K. Weigle
Sewers, Bridges, Municipal Work
Design and Construction Supervision
Estimates and Flood Control

30 N. Duke St., York, Pa.

SOUTH

Ewin Engineering Corporation

Designers of Port Facilities, Foundations, Industrial Plants, Bridges, Highways, Sewage Disposal and Municipal Projects.
P O Box 361, Mobile, Alabama
Jackson, Mississippi, Washington, D.C.

Polk, Powell and Hendon
Consulting and Designing Engineers

Municipal and Industrial Works.
Investigations and Reports
621 Stallings Building,
Birmingham 3, Alabama

Palmer and Baker, Inc.
Consulting Engineers - Architects

Surveys-Reports-Design-Supervision Consultation

Transportation and Traffic Problems
Tunnels-Bridges-Highways-Airports
Industrial Buildings
Waterfront and Harbor Structures
Graving and Floating Dry Docks
Complete Soils, Materials and Chemical Laboratories

Mobile, Ala. New Orleans, La.
Harvey, La.

James and Baxter Associates, Inc.
Architects & Engineers

A complete professional service
Architectural, Civil, Industrial, Municipal

2962-64 Coral Way Miami 34, Fla.

Duval Engineering & Contracting Co.
General Contractors

FOUNDATION BORINGS
For Engineers and Architects.

Jacksonville, Florida

Rader Engineering Co.

Water Works, Sewers, Refuse Disposal, Ports, Harbors, Flood Control, Bridges, Tunnels, Highways, Airports, Traffic, Foundations, Buildings, Reports, Investigations, Consultations.

111 N.E. 2nd Ave., Miami 32, Florida

Law-Barrow-Agee Laboratories, Inc.
Soils Engineers & Consultants

Soil Testing—Soil Boring—Rock Drilling—Load Testing—Field Control —Engineering Studies—Chemical Analysis—Physical Testing
Box 15556 Atlanta 7, Ga.
Serving the entire South

Patchen & Zimmermann
Engineers

Construction Plans, Cofferdams, Structures, Industrial Plants, Dams, Sewerage and Sewage Treatment, Water Supply and Treatment. Supervision, Surveys, Reports.

Augusta, Ga. Anniston, Ala.

Paulson Engineering Services, Inc.
Consulting Engineers

Marine Engineering, Dredge Design, Dredging Job Estimates, Land Reclamation Development.

P. O. Box 341 Charleston, S. C.

Eustis Engineering Company

FOUNDATION AND SOIL MECHANICS INVESTIGATIONS

Soil Borings — *Laboratory Tests*
Foundation Analyses — *Reports*

1625 Airline Highway
New Orleans 24, La.

Schmidt Engineering Co.
Consulting Engineers

Investigations, Reports, Designs, Supervision Heavy Construction—Dams and Hydroelectric Projects—Foundation Explorations and Treatment—Water and Sewerage Works — Bridges & Highways

817 Broad St. Chattanooga 2, Tenn.

MIDDLE WEST

Alvord, Burdick & Howson
CONSULTING ENGINEERS

Water Works	Sewerage
Water Purification	Sewage Treatment
Flood Relief	Power Generation
Drainage	Appraisals

20 North Wacker Drive, Chicago

A. J. Boynton & Co.
ENGINEERS

Fixed and Movable Bridges
Structures
Foundations

Design
Construction

100 N. Wabash Ave., Chicago 2.

Consoer, Townsend & Associates

Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.
351 East Ohio St., Chicago 11, Illinois

Ralph H. Burke, Inc.
CONSULTING ENGINEERS

Complete Architectural and Engineering Services
Plans, Supervision, and Reports

Expressways - Grade Separations
Traffic Studies - Parking Structures
Underground Garages- Shore Protection
Parks-Field Houses-Municipal Works
Airports and Air Terminal Buildings

20 North Wacker Drive, Chicago 6, Ill.

Greeley and Hansen
Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal

220 S. State Street, Chicago 4

Consult these Specialists:

Let them save your time by bringing their broad experience in their specialty to bear on your problems.

PROFESSIONAL SERVICES

Cards arranged by areas, states, cities, names

Additional cards on preceding pages

De Leuw, Cather & Company

CONSULTING ENGINEERS

Transportation, Public Transit and Traffic Problems

Industrial Plants — Grade Separations
Railroads — Expressways
Subways — Tunnels
Power Plants — Municipal Works

150 North Wacker Drive
Chicago 6, Ill.

79 McAllister Street
San Francisco 2, Calif.

Harza Engineering Co.

Consulting Engineers

Calvin V. Davis — E. Montford Fuetik
Richard D. Harza

Hydroelectric Plants and Dams
Transmission Lines
Flood Control, Irrigation
River Basin Development
400 West Madison Street — Chicago 6

Kornacker & Assoc., Inc.

Engineers

Bridges, Highways, Expressways and Railways, Building Structures, Industrial Plants, Supervision, Foundations and Soils, Investigations and Reports, Sewerage and Sewage Disposal, Surveys.

53 West Jackson Blvd. — Chicago 4, Ill.

Hazelet & Erdal

CONSULTING ENGINEERS

Fixed Bridges, Movable Bridges, Industrial Plants, Expressways, Airports, Dams

Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Commerce Bldg., Louisville 2, Ky.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations - - - Purchasing
Steam - - Hydraulic - - Gas
Public Utilities - - Industrials

231 So. La Salle St. — Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities—Industrials
Studies—Reports—Design
Supervision

Chicago

Chas. W. Cole & Son

Engineers - Architects

Sewerage, Water Supply, Bridges, Highways, Toll Roads, Industrial, Municipal and Commercial Buildings

220 W. LaSalle Ave., Central 4-0127
South Bend, Indiana

Testing Service Corporation

Testing Engineers - Engineering Geologists

Foundation Investigations—Laboratory analyses and Evaluation of Construction Materials—Soil Mechanics, Concrete and Asphalt Technology. Field Inspection and Consultation. Special Investigations for Dams, Turnpikes, Airports.

710 N. Brookfield, South Bend 28, Ind.

The H. C. Nutting Co.

Engineers — Chemists

Investigations - Reports
Inspection - Testing

Soils - Foundations - Building Materials
Water — Sewage

4120 Airport Rd. — Cincinnati 26, O.
2145 N. W. 2nd Ave. — Miami 37, Fla.

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Reports and Plant Location Surveys

New York — CLEVELAND — Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — C. A. Emerson
A. A. Burger — F. C. Telles — F. W. Jones
H. H. Moseley — J. W. Avery
E. S. Ordway — F. S. Palmeny

Consulting Engineers

Water, Sewerage, Garbage, Industrial Wastes, Valuations—Laboratories

Leader Bldg. — Woolworth Bldg.
Cleveland 14 — New York 7

The Osborn Engineering Co.

DESIGNING-CONSULTING

Industrial Plants — Office Buildings
Stadiums — Grand Stands — Field Houses
Bridges — Garages — Laboratories

7016 Euclid Ave. — Cleveland 3, Ohio

Jones, Henry & Williams

Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal

Security Building — Toledo 4, Ohio

Toledo Testing Laboratory

Engineers—Chemists

Concrete — Soils — Asphalt
Inspection — Research
Tests — Development

Foundation Investigation
Borings — Diamond Drilling — Load Tests
Soils Mechanics Laboratory

1810 North 12th St. — Toledo 2, Ohio

WEST OF MISSISSIPPI

Heron Engineering Co.

Consulting Engineers

For all types of Aerial Tramways, Cableways, and Suspended Structures

2000 South Acoma St.
Denver 19, Colorado

Stanley Engineering Company, *Consulting Engineers*

Airports - Drainage - Electric Power
Flood Control - Industrial - Rate Studies - Sewerage - Valuations - Water Works
Hershey Building — Muscatine, Ia.

Black & Veatch

Consulting Engineers

Water - Sewage - Electricity - Industry Reports, Design, Supervision of Construction, Investigations, Valuation and Rates.

4706 Broadway, Kansas City 2, Mo.

Burns & McDonnell

Consulting and Designing Engineers

P. O. Box 7088, Kansas City 2, Mo.

1404 E. 9th St., Cleveland 14, Ohio

Harrington & Cortelyou

Consulting Engineers

Frank M. Cortelyou

E. M. Newman — F. M. Cortelyou, Jr.

Movable and Fixed Bridges of All Types, Foundations, and Related Structures.

1004 Baltimore — Kansas City 6, Mo.

Russell and Axon

Consulting Engineers

Civil — Sanitary — Structural
Industrial — Electrical
Rate Investigations

401 Olive St. — St. Louis 2, Mo.
Municipal Airport, Daytona Beach, Fla.

Sverdrup & Parcel, Inc.

Consulting Engineers

Bridges, Structures and Reports, Industrial and Power Plant Engineering.

Syndicate Trust Bldg., St. Louis 1, Mo.
324 Bush St., San Francisco 4, Calif.

CHECK this section whenever you need professional advice.

Benham Engineering Co.

Established in 1909

Design and Construction Engineering Services for Water and Sewage—Highways and Structures—Airports—Power and Heating Plants

215 N E 23rd Street
Oklahoma City 5, Oklahoma

Huston Engineering

Engineers and Consultants

Dredging - Filling - Land Reclamation
Channels - Rivers - Harbors

Corpus Christi, Texas — P. O. Box 1437

Lockwood & Andrews

Consulting Engineers

Airports, Paving, Industrial Plants, Drainage & Sewerage, Site Locations, Soils & Foundations, Water Supply, Structures, Harbor Works, Valuations, Reports — Design — Supervision

Union Nat'l Bank Bldg., Houston, Tex.

FAR WEST

International Engineering Company, Inc.

ENGINEERS

Investigations - Reports - Design
Procurement - Field Engineering
Domestic and Foreign

74 New Montgomery St.
San Francisco 5, California.

FOREIGN

The Foundation Engineering Company of Puerto Rico

Consulting Engineers

Foundation and Soil Mechanics Investigations, Laboratory analyses, reports and recommendations, design of structures, Supervision.

P. O. Box 821, San Juan, Puerto Rico

INSPECTION & TEST

Robert W. Hunt Company

Inspection and Testing of Engineering Materials & Equipment

New York • Chicago • San Francisco and other Principal Cities

Johnson Soils Engineering Laboratory

Foundation Design - Highway & Airport Pavements - Construction Control - Load Tests - Shear & Consolidation Tests - MOBILE LABORATORIES

103 West Shore Ave., Bogota, N. J.
Bogota-Hubbard 7-4405

Engineers Testing Laboratory, Inc.

Foundation and Soil Mechanics Investigations

Soil Borings — Laboratory Tests
Foundation Analyses — Reports
3313 Main St. — Houston, Texas

THIS SECTION is available to consulting engineers to contact prospective clients everyweek or every other week.

SEARCHLIGHT SECTION

This index is published as a convenience to the reader. Every care is taken to make it accurate but SEARCHLIGHT SECTION assumes no responsibility for errors or omissions.

Air Compressor Rental Co. 120
Albert Pipe Supply Co., Inc. 123
Ambursen Dam Co., Inc. 122
American Air Compressor Corp. 121
American Institute of Steel Construction 119
Bahr, Edward E. 126
B & V Equipment Co., Inc. 121
California Division of Highways 118
Columbia Construction Co., Inc. 120
Contractors Machinery Co. 122, 123
Dallavia Co., The 119
Davidson Pipe Co., Inc. 123
Deatherage & Son Inc., Geo. E. 119
Don & Lou Excavators 120
Drachman Steel Corp., Hy. 122
Engelke, Conrad J. 123
Equipment Corp. of America 121
Fehrs Tractor & Equipment Co., Inc. .. 123
Forsythe Equipment Co., Inc. 122
Foster Co., L. B. 122
Frank, M. K. 122
Frantz Equipment Co. 119
Frazier-Davis Construction Corp. ..120, 122, 123
General Construction Co. 119
Gillis & Co. 122
Glerum & Son, Daniel 120
Globe Pipe & Fitting Co. 123
Greenheart Inc. 122
Hughes Bros. Inc. 123
Inland Steel Products Co. 118
Judge & Co., Frank M. 120
McCarrick Brothers 120
McDonough Construction Co. of Georgia 122
Midwest Steel Corp. 122
Mississippi Valley Equipment Corp. .. 121, 122
Montgomery Engineering Co. 120
O'Neill, A. J. 121
Philadelphia Transformer Co. 120
Patten Tractor Co. 120
Rayonier Inc. 118
Reading Inc., Eugene P. 120
Sheaf & Co., George 122
Sherman Transfer Co., Roger 123
Smith Co., H. Y. 123
Stanhope Inc., R. C. 118
Tagco, Inc. 123
Tamblyn System 119
Tool Design & Equipment Co. 120
Tractor & Equipment Co. 123
Williams Construction Co. 120
Wilson Engineering Co. 119
Winfield Welding Co., Inc. 120

ADVERTISERS IN THIS ISSUE

Adams Mfg. Co., J. D. 18
Allis-Chalmers Mfg. Co. (Tractors) 1
Allison Engine Div., G.M.C. 60
Aluminum Co. of America 55
Barber-Greene Company 32
Bayley Co., The Wm. 85
Bethlehem Steel Co. 36
Bucyrus-Erie Co. 16
Butler Bin Co. 75
Butler Mfg. Co. 69
Carter Waters Corp. 38
Cast Iron Pipe Research Assoc., Inc. 12, 13
Caterpillar Tractor Co. 28, 29
Cement Gun Company 87
Chicago Bridge & Iron Co. ..... 2nd Cover
Clark Equip. Co., Automatic Div. 31
Cleveland Tramrail Div., Cleveland Crane & Eng. Co. 83
Cleveland Trencher Co. 66
Cole Mfg. Co., R. D. 109
C. I. T. Corp. 56
Concrete Reinforcing Steel Institute 77
Connors Steel Div., H. K. Porter Co. 87
Continental Motors Corp. 30
Cummins Engine Co. 10, 11
Detroit Steel Products Co. 73
Dresser Mfg. Div., Dresser Industries 91
Electric Tamper & Equipment Co. 58
Erie Strayer Co. 90
Euclid Div. G.M.C. 97
Fennel Instrument Corp. of America 57
Foote Constr. Equip. Div., Blaw Knox Co. 40
Fort Pitt Bridge Works 105
Gateway Erectors, Inc. 96
General Electric Company, Electronics Dept. 68
Griffin Wellpoint Corporation 6
Gunite Concrete & Construction Co. 96
Gunite Construction Corp. 109
Hamilton Kent Mfg. Co. 7
Hartford Fire Insurance Co. 76
Hartford Accident & Indemnity Co. 76
Haven Busch Co. 96
Havre De Grace Shipyard, Inc. 92
Hendrick Mfg. Co. 94
Hetherington & Berner, Inc. 98
Hose-McCann Telephone Co., Inc. 46
Hyatt Bearings Div., G.M.C. 8
Insley Mfg. Corp. 39
International Harvester Co. 4, 5
International Salt Co., Inc. 81
International Steel Co. 71
Jackson Vibrators, Inc. 58
Jaeger Machine Co. 94
Jenkins Bros. 102, 103
Johns-Manville Corp. 67
Koehring Co., The 110, 111
Koppers Co., Wood Preserving Div. 3
Layne & Bowler, Inc. 9
Leschen Wire Rope Div., H. K. Porter Co. 52
Link Belt Speeder Corp. 20
Lock Joint Pipe Co. 114
Longyear Co. 88
Masonite Corp. 72
Mayo Tunnel & Mine Equip. Co. 86
McDonough Steel Co. 63
McKiernan-Terry Corp. 54
Midwestern Industries Inc. 93
Mississippi Glass Co. 127
Moretrench Corp. 49
Nat'l Clay Pipe Mfgrs., Inc. 78
Naylor Pipe Co. 34
Page Engineering Co. 92
Pittsburgh Coke & Chemical Co. 99
Pittsburgh Corning Corp. 15
Pittsburgh-Des Moines Steel Co. 59
Raymond Concrete Pile Co. ..... 3rd Cover
Ric-Wil Co. 62
Rogers Bros. Corp. 27
St. Paul & Tacoma Lumber Co. 100
Smith, Gordon & Co. 90
Snow-Nabstedt Gear Corp. 88
Sprague & Henwood, Inc. 109
Staeddler Co., J. S. 2
Stone & Webster Engineering Corp. 70
Superior-Lidgerwood-Mundy Corp. 86
Symons Clamp & Mfg. Co. 93
Taller & Cooper, Inc. 47
Tectum Corp. 51
Templeton Kenly & Co. 88
Thew Shovel Co., The 35
Timken Roller Bearing Co. ..... 4th Cover
Truscon Steel Company 95
Union Metal Mfg. Co. 30
Union Oil Co. 14
U. S. Steel Corp. 64, 65, 106, 107
Universal Sewer Pipe Corp. 53
Warren Knight Co. 96
Westinghouse Electric Corp. 42, 43
White Co., David 74
White Motor Co. 89
Wisconsin Motors Corp. 92
Wolverine Tube Division 113

Professional services ... 124, 125, 126

SEARCHLIGHT SECTION
(Classified Advertising)
H. E. Hilty, Mgr.

Employment 118, 119
Educational 119
Notices
Proposal 115, 116, 117
Equipment
(For Rent, Sales, Wanted) ... 119-123

ENGINEERING NEWS-RECORD
330 West 42 St., New York 36—LOngacre 4-3000

ABP Member

Number of copies of this issue printed 65,466
D. S. Robertson, Advertising Mgr.
Howard T. Olsen, Business Manager

ADVERTISING REPRESENTATIVES
New York, 36—300 W. 42 St.,
M. J. Storz, C. D. Neulan
S. Kennedy
Chicago, 11—520 No. Michigan Ave.,
L. H. Hunt, W. G. Payne
San Francisco, 4—68 Post St.,
R. E. Dorland
Philadelphia, 3—17th and Sansome Sts.,
A. B. Cozzens, D. G. Jensen
Cleveland, 15—Hanna Bldg.,
E. E. Duff, Jr.
Detroit, 26—Penobscot Bldg.,
J. A. Houghton
St. Louis, 8—Continental Bldg.,
B. F. Horn
Los Angeles, 17—1111 Wilshire Blvd.,
H. L. Keeler
Atlanta, 3—Rhodes-Haverty Bldg.,
W. D. Lanier
Dallas, 1—First National Bank Bldg.,
J. H. Cash

OTHER SALES OFFICES:
Pittsburgh, 22—738-39 Oliver Bldg.,
Boston, 16—350 Park Square Bldg.,
London, McGraw-Hill House

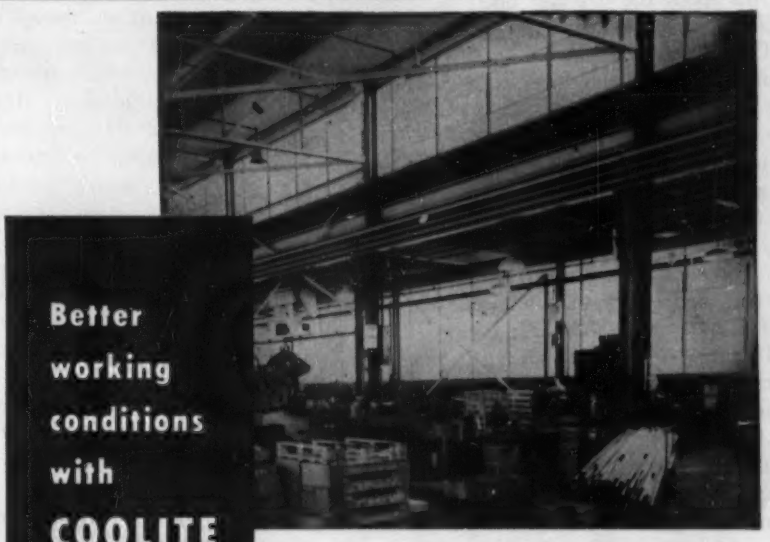

Better working conditions with COOLITE

General Contractor—
Joseph Bucheit & Sons, Youngstown, Ohio
Glazing—Pittsburgh Plate Glass Company, Youngstown, Ohio

Employes of the General Fireproofing Co., modern office furniture and fixtures manufacturer in Youngstown, Ohio, see better, feel better, work better in areas flooded with conditioned daylight. Eye comfort is an important factor in improved working conditions; so approximately 29,000 sq. ft. of Coolite, Heat Absorbing and Glare Reducing Glass were installed to provide copious quantities of natural illumination at low cost. For Coolite removes the harmful elements of "raw" sunlight...cuts glare that causes eye fatigue and costly mistakes...absorbs up to 50% of solar heat to make interiors more comfortable.

Rolled, Figured and Wired glass by Mississippi is "visioneered" for better daylight illumination. Available in a wide variety of surface finishes all scientifically designed to distribute light to best advantage. In your building or remodeling projects specify Mississippi Glass.

Send for free catalog, "Coolite Heat Absorbing and Glare Reducing Glass."

MISSISSIPPI Glass COMPANY
88 ANGELICA ST. SAINT LOUIS 7, MO.
NEW YORK • CHICAGO • FULLERTON, CALIF.
WORLD'S LARGEST MANUFACTURER OF ROLLED, FIGURED AND WIRED GLASS

EDITORIALS

Planning for Helicopters

A LIVELY DISCUSSION is going on between the operators and the manufacturers of helicopters as to whether landing facilities—heliports as they are coming to be called—should be definitely planned for now or wait on the future development of these useful flying machines. The operators, represented by the helicopter group in the International Air Transport Association, say plan now. The Helicopter Council of the Aircraft Industries Association says wait until more is known about the size and operating characteristics of these rotary-wing aircraft.

The operators, in our opinion, have the better argument. It was possible in the case of airports to permit the airplane to influence their location and size, since these could be varied over a wide range. Heliports, to be useful, must be in or near the center of cities. Also, because of this location, a rather definite limit is placed on their size. Under such circumstances it is the design of the machine that must be fitted to the heliport, not vice versa. There may be a place for large freight-carrying helicopters that can use outlying fields, but that is another question.

The aircraft people say that it would be a mistake to freeze the design of heliports on the basis of present knowledge of the machines. But this is no more than the kind of logic that should be applied to the problem at almost any stage. A lot can be done before detail designs are irretrievably set.

In this connection it seems providential that new interest is just now being generated in slum clearance as a result of the new federal urban renewal legislation. The open areas, many right in the hearts of cities, which would result from slum clearance would be potential sites for heliports. Now, therefore, is the time to plan for them.

It is not as if the helicopter were still a dream-form of transportation. Already in this country we have a few examples of both intracity and intercity movement of freight by helicopter, and there have been some experiments with and some actual operation of passenger service. One such service, for example, operates regular scheduled passenger flights among New York's three widely scattered major airports.

Abroad, the development has progressed even farther, notably in the case of Sabena Belgian Airlines which operates regular helicopter passenger runs touching such cities as Brussels, Antwerp, Liege, Rotterdam, Cologne and Bonn. A recent report says that 30,000 passengers have been carried by Sabena in seven-seat copters during the past year. Another contains the news that Sabena has ordered several two-engine helicopters that will carry 40 passengers. Significantly, the machines are U. S.-made, by Sikorsky.

Some guesswork is still necessary as to heliport requirements, but a surprising amount of information firm enough for planning purposes is available. Strangely enough, some of the best of this was advanced by a member of the aircraft manufacturers' Helicopter Council, John P. W. Vest of the Sikorsky Company, in a paper at the ASCE convention a year ago.

One basic heliport requirement is a suitable access path, which for safety and clearance reasons, should be over a river, along railroad rights-of-way or over parks or parkways. The area required for a heliport is still somewhat problematical, although more area than necessary for vertical takeoffs and landings is definitely needed for safe and economical operation of helicopters, which should have about 500 ft of horizontal flight available to them to take off efficiently. If this amount of space plus that needed for service facilities is too great for a ground level heliport, a structure will have to be considered with the landing field on the roof and service facilities on the floors below. Loads to be designed for would be those of 50- to 60-passenger ships which would weigh in the neighborhood of 45,000 lb.

In any event, with data of such nature available and more being developed here and abroad, heliport planning should not be relegated to some distant future time. The problems many cities have with poorly located railway and bus terminals should not be duplicated for this new form of transportation, if they can be avoided.

Help for Engineering Schools

ANNOUNCEMENT that the General Electric Company will match dollar for dollar up to $1,000 the gifts that its employees make to the colleges from which they graduated will be welcome news for the engineering schools of this country in view of the large number of engineers employed by GE. In recent years all college operating costs have risen rapidly, but engineering school costs have gone up faster than the average. Consequently, their needs are greatest.

The directors of many corporations have recognized the growing need of colleges for more funds to meet their mounting operating costs, but they have found great difficulty in developing plans for giving such aid that are practical and yet avoid appearing to favor one school over another. Some have set up scholarships for children of employees, others make regular contributions to schools from which they employ graduates, etc., but none of these is completely satisfactory. The GE plan seems to offer one way around this dilemma. Also, it has the added advantage of stimulating larger gifts from individual alumni, thus adding to the gifts going to the colleges and spreading the load. If widely followed by other companies, the plan started by GE could add very materially to the income colleges now get from their alumni organizations.

engineered for the job!

* **ADVANTAGES OF RAYMOND CONCRETE PILES... Number four of a series**

THE 5 TYPES OF RAYMOND PILES SHOWN... from left to right

STANDARD • STEP-TAPER
PIPE STEP-TAPER
WOOD COMPOSITE • CAISSON

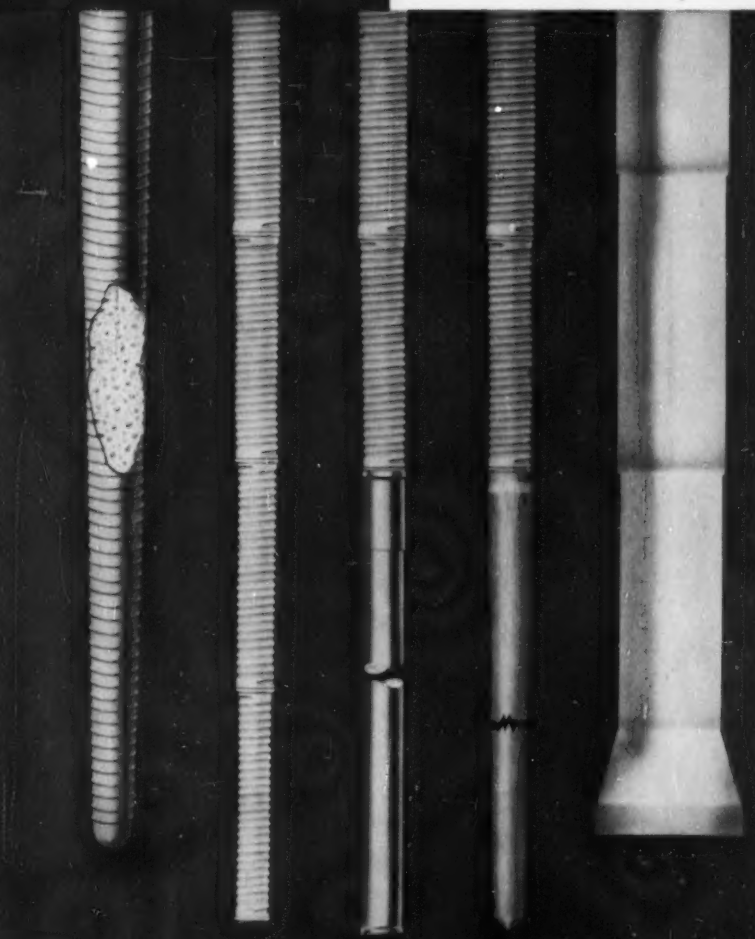

REGARDLESS of the subsoil conditions there's a Raymond Pile specifically designed to do the job safely and economically. The *Standard Pile* with its heavy taper is ideal as a friction pile. The *Step-Taper Pile* is used where it is desirable for the pile to reach a hard stratum at a considerable depth. The *Pipe Step-Taper Pile* is used where piles of great length are required. *Wood Composite Piles* combine the advantage of the permanence of concrete piles with the low cost of wood piles. *Raymond Gow Caissons* are efficient and economical for supporting heavy concentrated loads under certain soil conditions.

RAYMOND

CONCRETE PILE CO.

140 CEDAR STREET • NEW YORK 6, N. Y.

Branch Offices in Principal Cities of the United States, Central and South America

RAYMOND'S DOMESTIC SERVICES

Soil Investigations • Foundation Construction
Harbor and Waterfront Improvements
Prestressed Concrete Construction
Cement-mortar Lining of Water, Oil and Gas Pipelines, In Place

RAYMOND'S SERVICES ABROAD... In addition to the above, all types of General Construction.

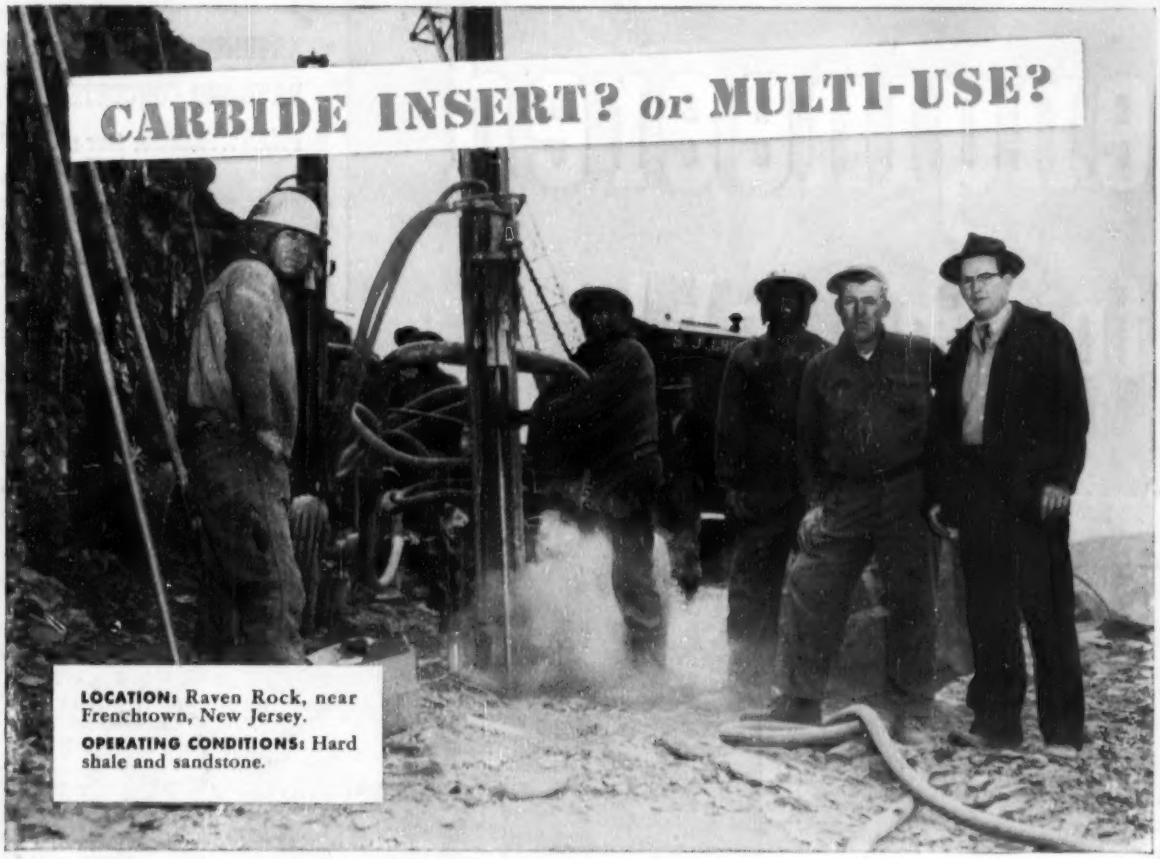
CARBIDE INSERT? or MULTI-USE?
LOCATION: Raven Rock, near Frenchtown, New Jersey.
OPERATING CONDITIONS: Hard shale and sandstone.

S. J. Groves & Sons Co. saves 15% in bit replacement and reconditioning with TIMKEN® carbide insert bits

VARIOUS makes of bits were tested by S. J. Groves & Sons Co. while drilling in hard shale and sandstone on the Route 29A highway project near Frenchtown, N. J. The winner: Timken® carbide insert bits. They saved 15% in bit replacement and reconditioning over the others tested!

Timken carbide insert bits drill longer without sharpening. Bit reconditioning is minimized. Because of a special shoulder union developed by the Timken Company threads are not subjected to drilling impact. And Timken carbide insert bits last longer, too, because they're made from electric furnace Timken fine alloy steel.

With Timken carbide insert bits, drillers can drill out full increments of drill steel in extremely abrasive ground where it is otherwise impossible. They give highest speed through hard, abrasive ground with fewer bit changes. And they're always your best bet for constant-gage holes, small diameter blast holes, and very deep holes.

But Timken carbide insert bits may not always be best for all your drilling jobs.

For drilling ordinary ground, Timken multi-use bits are most economical. With correct and controlled reconditioning, they give you lowest cost per foot of hole when full increments of steel can be drilled.

Both Timken carbide insert and multi-use bits are interchangeable in the same thread series. Drillers can change bit types quickly and easily as the ground changes—right on the job!

To find out which bit type is best for your drilling needs, consult the Timken Rock Bit Engineering Service. Write The Timken Roller Bearing Company, Rock Bit Division, Canton 6, Ohio. Cable address: "TIMROSCO".

Timken threaded multi-use rock bit

Timken threaded carbide insert rock bit

... your best bet for the best bit ... for every job

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.